




**P509-518**



## “L” LOCK LEVER TRIM

### Installation Instructions

1. Position lever through bushing on rose.
2. Place retainer ring into opening in bushing and push into place with retaining tool.

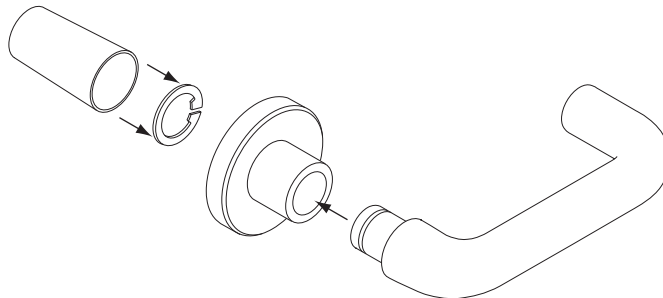

3. Complete lock assembly as instructed on installation sheet provided with lock.
- ⓘ Removal of retaining clip requires #02 Truarc pliers.

**Customer Service**  
1-877-671-7011  
[www.allegion.com/us](http://www.allegion.com/us)



© 2014 Allegion  
Printed in U.S.A.  
P509-518 Rev. 01/14-b