




RS-485 integration for AD-300 hardwired and AD-400 wireless devices

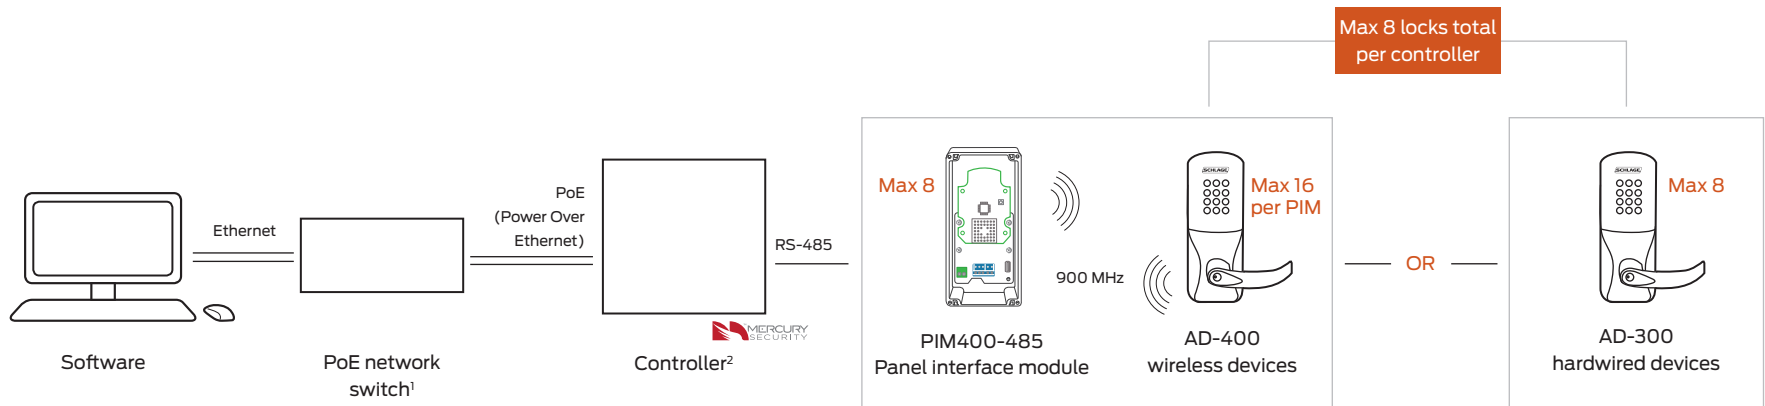

1 In order to have a UL Listed configuration a UL294 12VDC power supply must be used instead of PoE

2 2 AD-300 or PIM400-485 can be PoE (Power Over Ethernet) the remaining 6 AD-300 or PIM400-485 will be powered from an external 12/24VDC power supply

AD-400 wireless range up to 200' in typical building construction, up to 1000' line of sight.