

STEELCRAFT

3-Day Express Frames

The Steelcraft Express Frames program makes the process of ordering and storing inventory easier than ever. When sticking to tight schedules and aggressive deadlines, it's critical to get your frames to the job site fast. The Express Frames offering provides three day shipping on select frames with the sense of urgency you require.

3-Day Express product availability


See reverse side for current frame availability

3-Day Express ordering

- Orders must be placed using OEW (Steelcraft's online order entry tool)
- OEW incentive discounts do not apply
- Please consult your Sales Rep for program discounting
- Program penalty applies to either buying program orders or valid project quotes
- For frame needs larger than 50 please contact your Sales Rep
- Orders will ship LTL but upon request can be held for that week's scheduled shipment if applicable
- Order clarifications or incomplete information may result in a delayed lead-time
- Three day lead-time starting the day after order receipt. Order cut-off time is 1pm EST

Day of shipping
Thursday
Friday
Following Monday
Following Tuesday
Following Wednesday

Note: The cutoff dates will be adjusted for weeks with holidays. Refer to the weekly lead-time bulletin for any schedule adjustments.

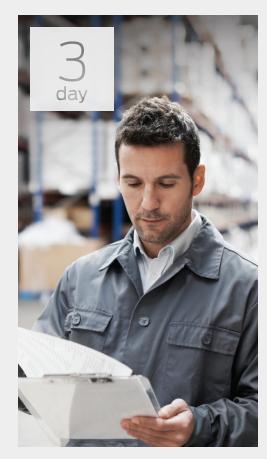

Fast, reliable, quality

Steelcraft is dedicated to improving the efficiency and customer satisfaction of their service programs. Steelcraft also has a complimentary two day stock program in addition to its standard stock program. Some exceptions apply. Please see the Express two day sheets for more detail.

Three day frame options (OEW orders only) Frame series: Prep for 1 3/4" thick door DW and K Series 4 2" face jambs and 2" or 4" face head FN Series FN Series FN Series FN Series FN Series FN Series Standard profile sections only Knocked down (KD) standard (face and full profile welding adds 5 days) Frame material: 16 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series 15 Gage F, FN, DW, K, MU, C, CK Series 16 Gage F, FN, DW, K, MU, C, CK Series 17 GRAD DW, KC, and CK 18 Jamb depth range (min/max): Note: 4" face head jamb depth limit is 81/4" F, FN and MU DW, KC, and CK 19 Junequal rabbet 51/4" to 12 3/4" 43/4" to 12 3/4" Cased open 42/4" to 12 3/4" 51/6" to 12 3/4" Cased open 42/4" to 12 3/4" 51/6" to 12 3/4" Frame opening sizes (min/max): Jamb 31 0" min, 81 0" max Head 2 0" min, 71 10" max Frame hardware: Hinges Blank, 45/4" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 11/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Preps ordered by Steelcraft Cat. #535 only Strikes Preps ordered by Steelcraft Cat. #535 only Strikes Preps ordered by Steelcraft Cat. #535 only Strikes Giynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating Frame hardware Available where applicable. Indicate hourly rating Frame national care in the case of the prepose of the case of the	
DW and K Series - 2" face jambs and 2" or 4" face head - FN Series 1" face all three pieces only - Standard profile sections only - Standard only - Standard CK - Standard	
FN Series FN Series Face all three pieces only	
Standard profile sections only Knocked down (KD) standard (face and full profile welding adds 5 days) Frame material: 16 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series Jamb depth range (min/max): Note: 4" face head jamb depth limit is 8"/-" F, FN and MU DW, K, C, and CK Unequal rabbet 4 3"/-" to 12 3"/-" 4 3"/-" to 12 3"/-" Cased open 4 3"/-" to 12 3"/-" 5 1"/-" to 12 3"/-" Frame opening sizes (min/max): Jamb 3" 0" min, 8" 0" max Head 2" 0" min, 7" 10" max Frame hardware: Hinges Blank, 4 1"/-" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1"/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, A5A, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Blank, A5A, RPD, VRPD or CYL at Steelcraft or unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
* Standard profile sections only Knocked down (KD) standard (face and full profile welding adds 5 days) Frame material: 16 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series 15 Jamb depth range (min/max): Note: 4° face head jamb depth limit is 8°/-" F, FN and MU Unequal rabbet 4°/-«" to 12°/-«" 5°/-«" to 12°/-«" Equal rabbet 5°/-«" to 12°/-«" 5°/-«" to 12°/-«" Cased open 4°/-«" to 12°/-«" 5°/-«" to 12°/-«" Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4'/-«" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1'/-2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Closers RA, PA and RA or PA at both ends Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Frame material: 16 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series F, FN and MU DW, K, C, and CK Unequal rabbet 4 ³ / ₄ " to 12 ³ / ₄ " 4 ³ / ₄ " to 12 ³ / ₄ " Equal rabbet 5 ¹ / ₆ " to 12 ³ / ₄ " 5 ¹ / ₆ " to 12 ³ / ₄ " Cased open 4 ³ / ₄ " to 12 ³ / ₄ " 7 Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 ³ / ₂ " or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 ¹ / ₂ pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, A5A, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlass Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
I6 Gage F, FN, DW, K, MU, C, CK Series 14 Gage F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series Jamb depth range (min/max): Note: 4" face head jamb depth limit is 83/4" F, FN and MU DW, K,C, and CK Unequal rabbet 43/4" to 123/4" 43/4" to 123/4" Cased open 43/4" to 123/4" 51/6" to 123/4" Frame opening sizes (min/max): Jamb 3'0" min, 8'0" max Head 2'0" min, 7'10" max Frame hardware: Hinges Blank, 41/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 11/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlosers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes In head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
14 Gage F, FN, DW, K, MU, C, CK Series CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series Jamb depth range (min/max): Note: 4" face head jamb depth limit is 83/4" F, FN and MU DW, K,C, and CK Unequal rabbet 43/4" to 123/4" 43/4" to 123/4" Equal rabbet 57/6" to 123/4" 57/6" to 123/4" Cased open 43/4" to 123/4" - Frame opening sizes (min/max): Jamb 3'0" min, 8'0" max Head 2'0" min, 7'10" max Frame hardware: Hinges Blank, 41/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 11/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL stoes RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
CRS, A60 or G90 F, FN, DW, K, MU, C, CK Series Jamb depth range (min/max): Note: 4" face head jamb depth limit is 8"/-" F, FN and MU Unequal rabbet 4 3 /-4" to 12 3 /-4" 5 1 /-6" to 12 3 /-4" 5 1 /-6" to 12 3 /-4" Cased open 4 3 /-4" to 12 3 /-4"	
Jamb depth range (min/max): Note: 4" face head jamb depth limit is 8"\%" F, FN and MU Unequal rabbet 4 3\%" to 12 3\%" 5 \%" to 12 3\%" 5 \%" to 12 3\%" Cased open 4 3\%" to 12 3\%" - Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 \%'\%" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 \%'\% pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL steels are special locations.	
F, FN and MU Unequal rabbet 4 ³/4" to 12 ³/4" 4 ³/4" to 12 ³/4" Equal rabbet 5 '/6" to 12 ³/4" 5 !/6" to 12 ³/4" - Seed open 4 ³/4" to 12 ³/4" - Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 ¹/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 ¹/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Unequal rabbet 4 3/4" to 12 3/4" Equal rabbet 5 1/6" to 12 3/4" Cased open 4 3/4" to 12 3/4" - Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 1/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Equal rabbet 5 1/8" to 12 3/4" Cased open 4 3/4" to 12 3/4" Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 1/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Cased open 4 3 1/4" to 12 3 1/4" - Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 1/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Frame opening sizes (min/max): Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 1/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Jamb 3' 0" min, 8' 0" max Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 ½" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1½ pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Head 2' 0" min, 7' 10" max Frame hardware: Hinges Blank, 4 1/2" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1 1/2 pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL s Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Hinges Blank, 4 ½" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1½ pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Hinges Blank, 4 ½" or 5" at Steelcraft or special vertical locations; Two (2) pair in lieu of 1½ pair Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Continuous hinges With or without reinf. Default is without unless otherwise specified Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL schlages Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Strikes Blank, ASA, RPD, VRPD or CYL at Steelcraft or special vertical locations. Schlage 10-121 DBL strikes RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Closers RA, PA and RA or PA at both ends Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Flushbolts Universal at standard or special locations for unequal pairs of doors Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	trike
Deadlock strikes Preps ordered by Steelcraft Cat. #535 only Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Strikes in head CYL or VRPD strike preps in head Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Electrical hardware Door position switch, electric hinge (inc. continuous), power transfers and ASA based electric Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Note: Some electrical hardware not available for FN-Series Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Overhead stop/holders Glynn-Johnson 100 Series and ABH 1000 Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	strikes
Labels: UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
UL and ITS/WHI labels Available where applicable. Indicate hourly rating	
Erama producte:	
Frame products:	
Hospital stops • Unequal rabbet, 45 deg, 4", 5 ½", and 6" heights	
(F and MU only) 5 3/4", 5 7/8", 8 1/4" and 8 3/4" jamb depths	
 Quantity limit lower than program limits may apply 	
4-sided borrowed lights See available jamb depths, glazing bead not included	
Pierce and dimple For EMA anchors, anchors not included	
Jamb anchor Masonry wire anchor	
Lock in universal wood or steel stud anchors	
Lock in standard jamb depth wood or steel stud anchors	
Weld in wood stud or steel stud anchors	
Base anchor Adjustable base (F, FN and MU), weld-in base anchor or OMIT	

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions. Allegion had \$2.9 billion in revenue in 2019 and sells products in almost 130 countries. For more, visit www.allegion.com

OMIT, Twist-in (DW Series) or Dimpled (K Series)

