



921018-00

Trim

# 210K

# VON DUPRIN®

Installation Instructions

Vertical center line corresponds to vertical center line on exit device instructions

1. Prepare door for exit device. See exit device instructions for holes and center lines.
2. Prepare door for trim:
  - A. Transfer vertical center line from inside (exit device side) of door to outside (trim side) of door. Use extra care if edge of door is beveled. Be sure vertical center line is parallel to edge of door.
  - B. Locate and prepare holes as shown.
3. Apply trim. Cylinder must be in position shown in Figure 1 with key removed. See opposite side for 2-1/4" thick doors.
4. Apply device and thru-bolt to trim.

When installing trim, cylinder must be in this position with key removed





Figure 1

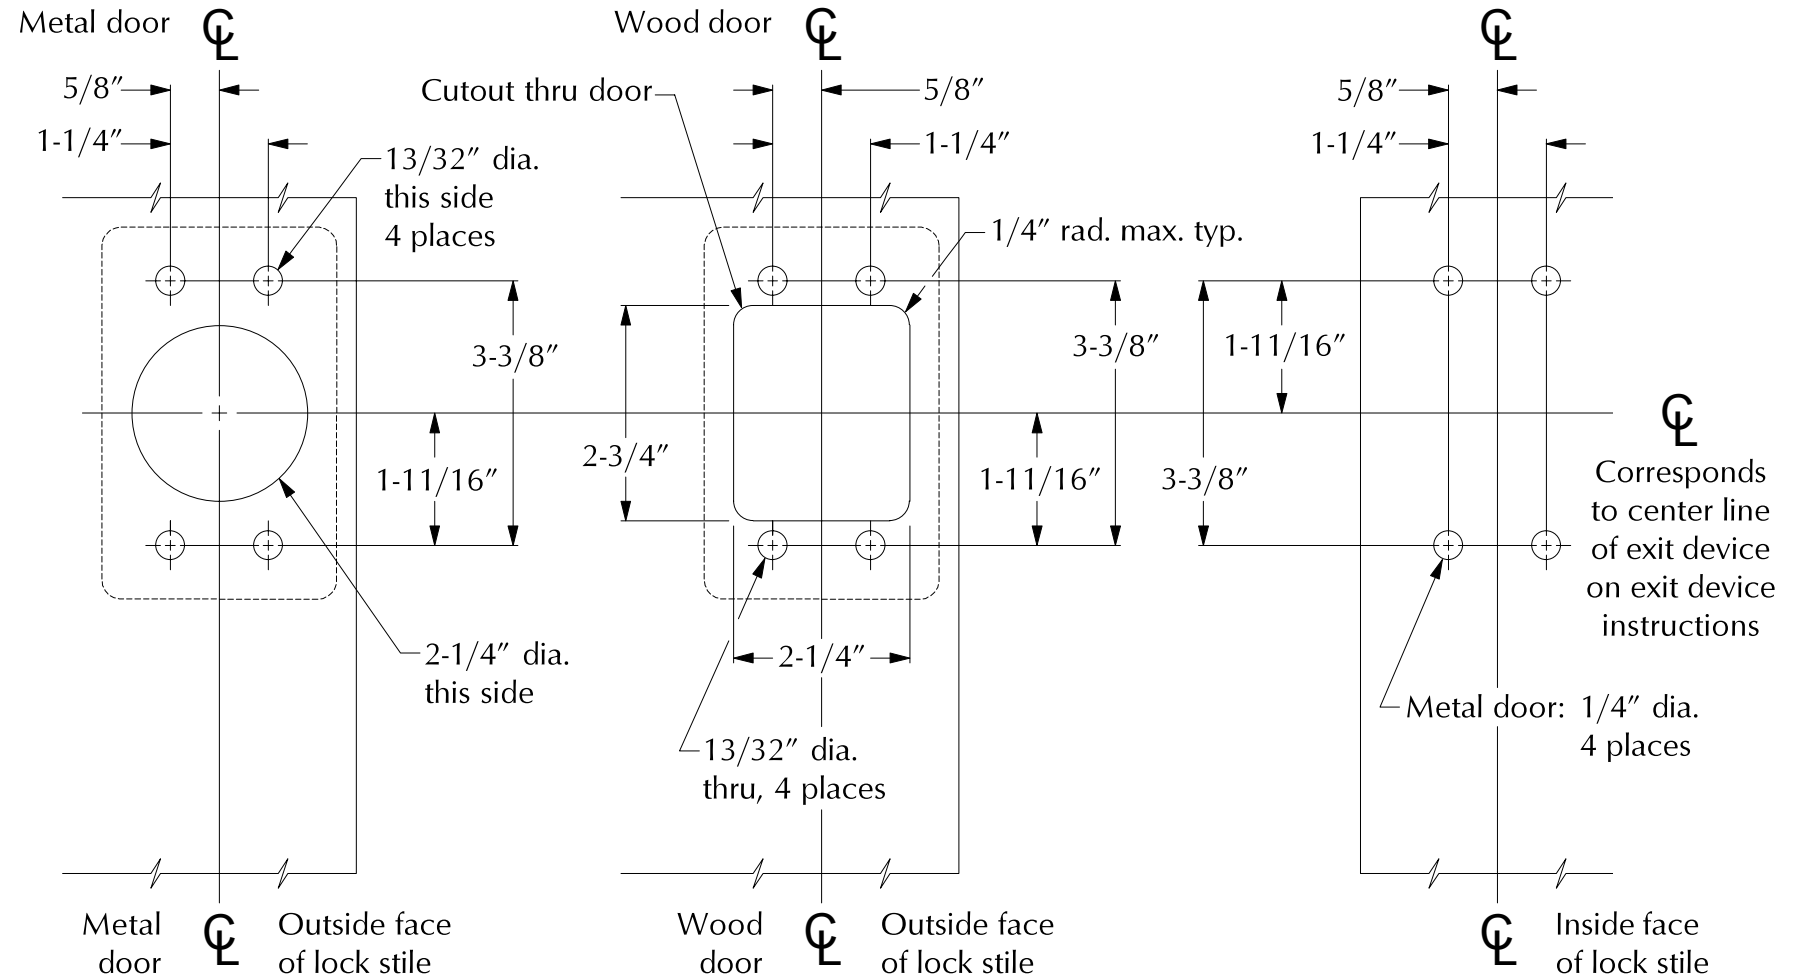

LHR shown, RHR opposite

For cutouts on inside face of door, see exit device instructions

**Customer Service**  
1-877-671-7011    www.allegion.com/us




© Allegion 2014  
Printed in U.S.A.  
921018-00 Rev. 01/14-b

## TRIM CONVERSION FOR 2-1/4" THICK DOOR


Trim is shipped for 1-3/4" thick door. To convert trim for use on 2-1/4" thick door, do the following:

1. Remove the roll pin that connects the knob shaft to the plastic booster (Figure 1).
2. Pull the knob shaft out to the second hole (Figure 2).
3. Install the roll pin through the plastic booster into the knob shaft and through the other side (Figure 2). Be sure that the sleeve bearing is in place behind the roll pin.
4. Adjust the roll pin so it extends the same distance on each side of the plastic booster (Figure 3).

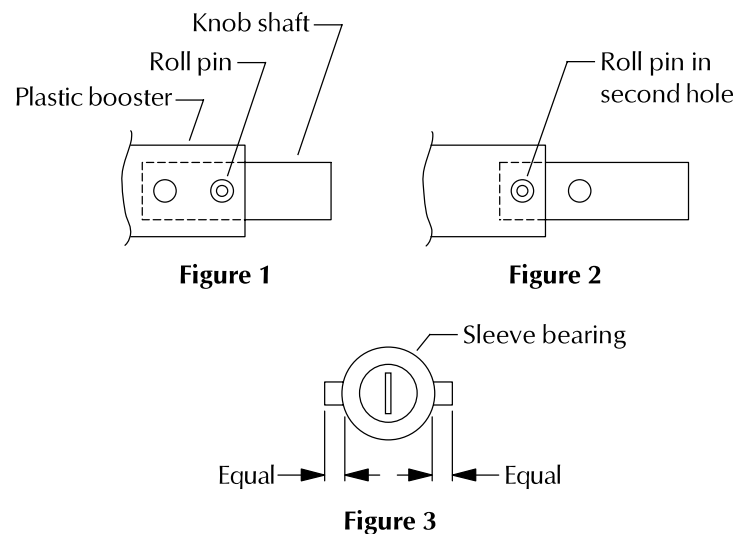

## KNOB DISASSEMBLY INSTRUCTIONS

1. Turn the key clockwise 1/4 turn.
2. Use a tool to push in the spring loaded catch and simultaneously pull the knob away from the trim.
3. Separate the knob sleeve from the knob by inserting a thin blade around the rim between the knob sleeve and the knob.
4. Pull out the cylinder spacer.
5. Remove the key by returning it to its original position and then pulling it out.
6. Pull out the cylinder. Do not remove the cylinder support.

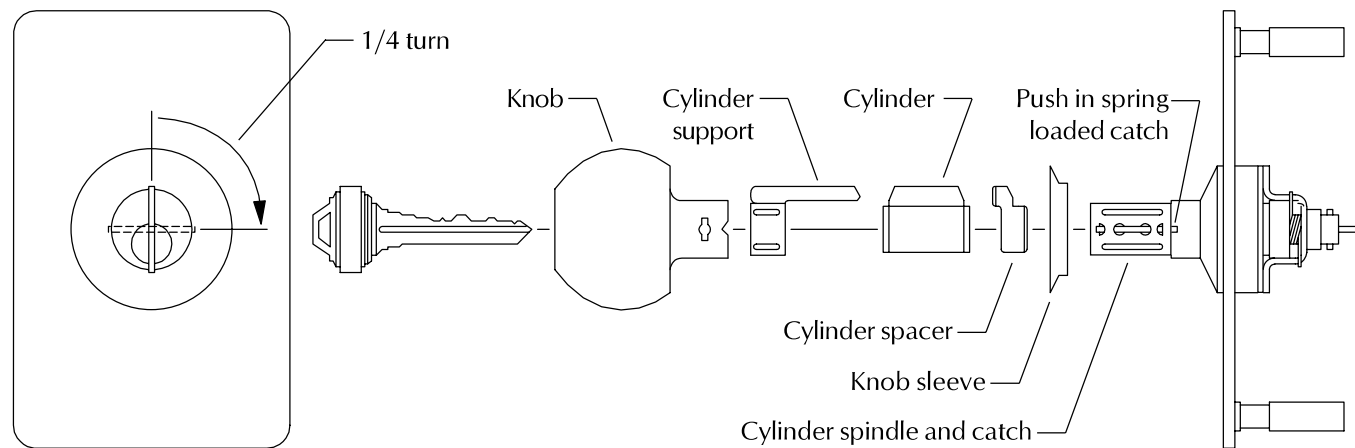

## KNOB ASSEMBLY INSTRUCTIONS

1. Insert the cylinder into the cylinder support and knob.
2. Insert the key into the cylinder and turn the key clockwise 1/4 turn.
3. Insert the cylinder spacer.
4. Install the knob sleeve.
5. Slide the knob onto the cylinder spindle.
6. Use a tool to push in the spring loaded catch and simultaneously slide the knob onto the cylinder spindle until the spring catch engages the knob.