

INSTALLATION DIRECTIONS

BEFORE APPLYING THIS DEVICE

- A. Threshold (if any) must be installed.
- B. Doors must be fitted and hung.
- C. Check that handing of hardware corresponds to handing of door.
- D. Apply Astragal (if any). See template No. 40106 for applying Astragal.

1. PREPARE DOOR

- A. Tape template No. 1 to inside face of lock stile. Be sure centerline "X-X" of template is parallel to edge of door and backset is as shown in schedule. Be sure centerline device is 39 13/16" to finished floor.
- B. Prepare door as shown. See Fig. 1 for wood door application and Fig. 2 for metal door application.

NOTE: SEX BOLTS ARE FURNISHED FOR WOOD, FORMICA, AND STEEL COVERED COMPOSITE DOORS. SEE FIG. 6

2. APPLY OUTSIDE TRIM

- A. See directions in trim carton. Line "X-X" on trim template corresponds to line "X-X" on device template and is parallel to edge of door. Transfer line "X-X" from inside face to outside face of door.
- B. Prepare outside face of lock stile.
- C. Cut off cylinder tailpiece if necessary, to extend 1/4" to 1/2" beyond inside face of door and into device case. Cut 3/8" off thumbpiece for 1 3/4" thick door installation.

3. INSTALL LEVER ARMS

- A. Insert lever arms into lock stile and hinge stile cases.
- B. Assemble axles and tighten securely. (See instructions in axle envelope.)

4. APPLY LOCK STILE CASE

- A. Attach lock stile to door. See Fig. 1 or 2.

5. APPLY HINGE STILE CASE AND CROSSBAR TUBE (FIG. 7)

- A. Slip crossbar tube on lock stile and hinge stile lever arms. (See form No. 52 for cutting crossbar)
- B. Be sure crossbar is level and hinge stile case is parallel to edge of door and approximately on centerline of exposed stile.
- C. Using holes in hinge stile case, mark location and prepare door for attaching screws.
- D. Apply hinge stile case with crossbar in place.
- E. Tighten wedge-lite set screws securely with dog key and screwdriver or equivalent for leverage and test crossbar for free action. (See Form No. 52 for these instructions.)

6. INSTALL SOFFIT LATCH BOLT ASSEMBLY (FIG. 6)

- A. Block door in open position.
- B. Install latch bolt as shown.

7. APPLY TOP LATCH CASE (FIG. 9)

- A. Close door against stop.
- B. Tape template No. 3 to door and stop.
- C. Prepare door for latch case and apply.

8. APPLY PLUNGER RELEASE BRACKET (FIG. 8)

- A. Close door against stop.
- B. Position backset to depress plunger, and allow rods to fall into engaged position.
- C. Tighten bracket mounting screws.

9. APPLY TO ROD

- A. Block door in open position.
- B. Check rod for correct length. See instruction sheet 0836 for cutting 88 vertical rods.
- C. Drive in top rod connector.
- D. Attach top rod with rod guide. (See Fig. 3) adjust rod length so connector fits as shown (Fig. 4)
- E. Check top rod for full retraction of latch bolt. Top rod should be flush to 1/16" above latch release surface.

10. APPLY BOTTOM LATCH CASE

- A. Close door against stop so top bolt engages.
- B. Tape template No. 2 to door and floor indicated on template.
- C. Prepare door for latch case and floor or threshold for strike and apply.


11. APPLY BOTTOM ROD

- NOTE: DO NOT CUT BOTTOM ROD
- A. Block door in open position.
- B. Retract bottom latch bolt.
- C. Adjust rod so rod connector fits as shown. (Fig. 5)
- D. Test door for top and bottom latch engagement.


12. APPLY TOP AND BOTTOM LATCH CASE COVER

13. APPLY COORDINATOR

- NOTE: 1237 COORDINATOR MUST BE SURFACE APPLIED WHEN USED WITH 8813 & 8817 SERIES EXIT HARDWARE. SEE DIRECTIONS IN COORDINATOR PACKAGE.

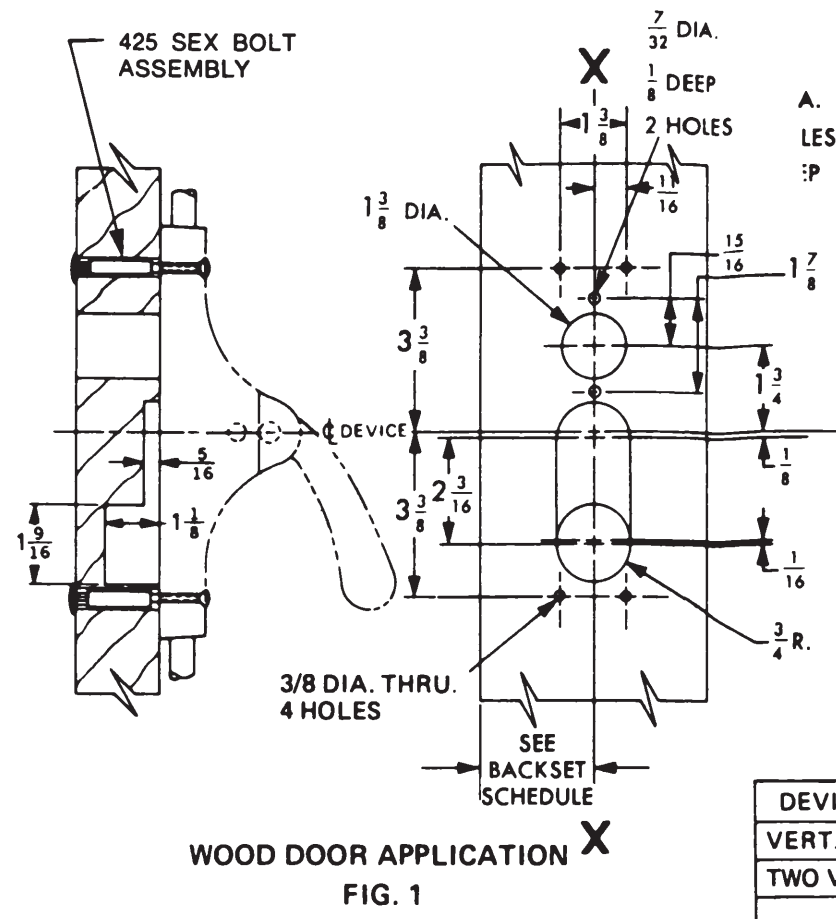

WOOD DOOR APPLICATION
FIG. 1

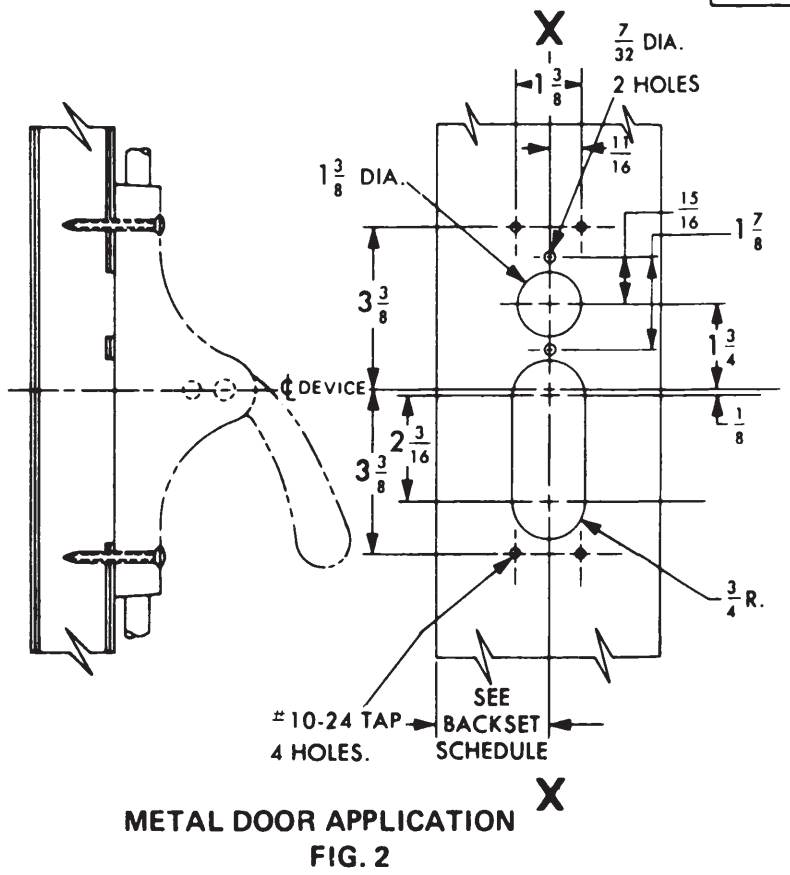

METAL DOOR APPLICATION
FIG. 2

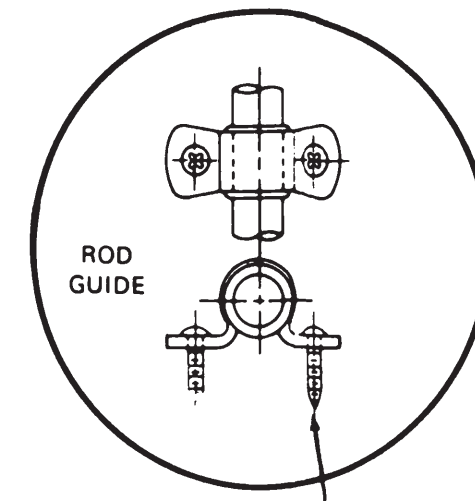


FIG. 3 # 10-24 TAP FOR METAL DOORS. # 10 W.S. FOR WOOD DOORS. SIZE OF PILOT HOLES FOR WOOD DOORS DEPENDS ON HARDNESS OF WOOD 2 HOLES

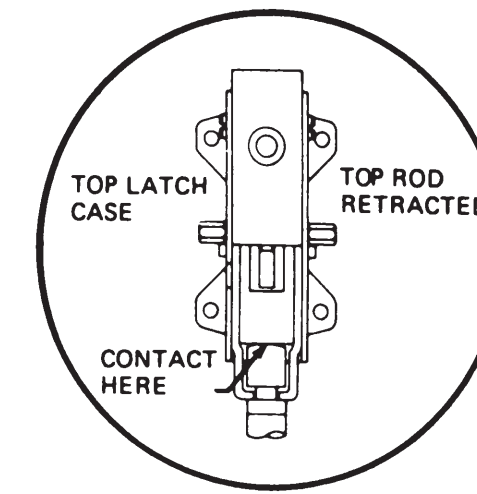


FIG. 4

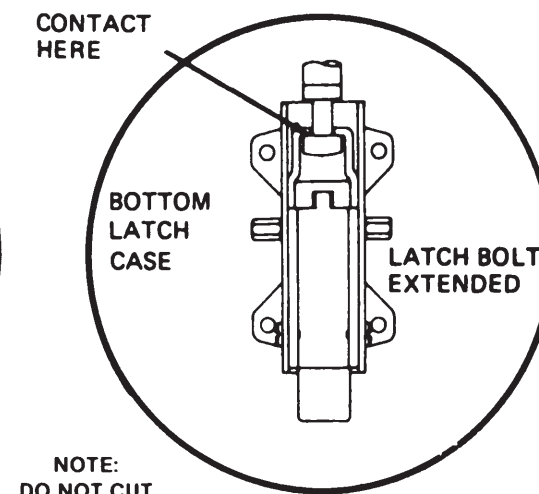


FIG. 5

NOTE: DO NOT CUT BOTTOM ROD



911165-00

DEVICE INSTALLATION SCHEDULE	
VERT. ROD & MORT. DEVICE	2 3/4
TWO VERT. ROD DEVICES	2 3/4
WHEN SURFACE APPLIED CO-ORDINATOR IS USED BACK-SET OF VERTICAL ROD DEVICE MUST BE	2 3/4

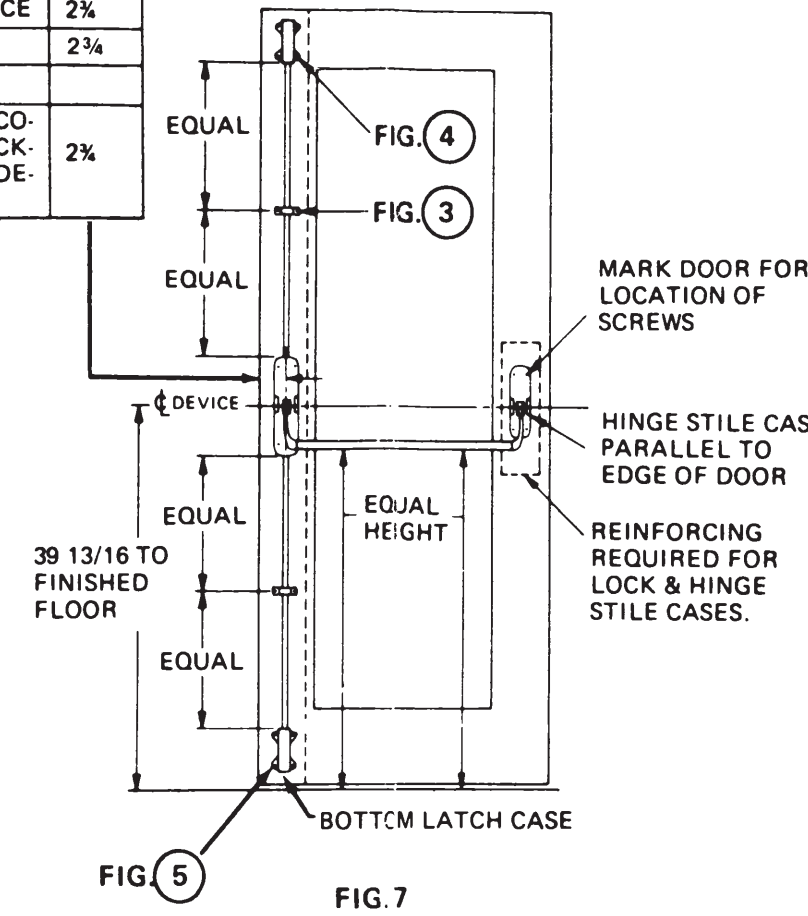


FIG. 7


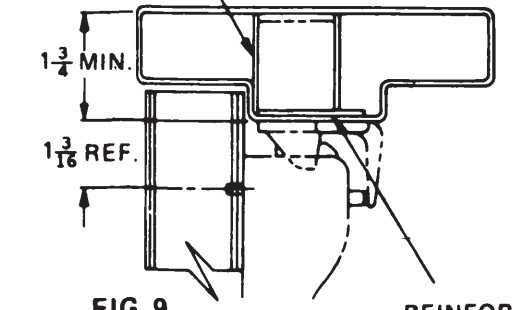


FIG. 9

REINFORCING REQUIRED FOR SOFFIT LATCH MUST BE RECESSED 1/8" FROM TOP SURFACE OF STOP.



SOFFIT FRAME REINFORCEMENT

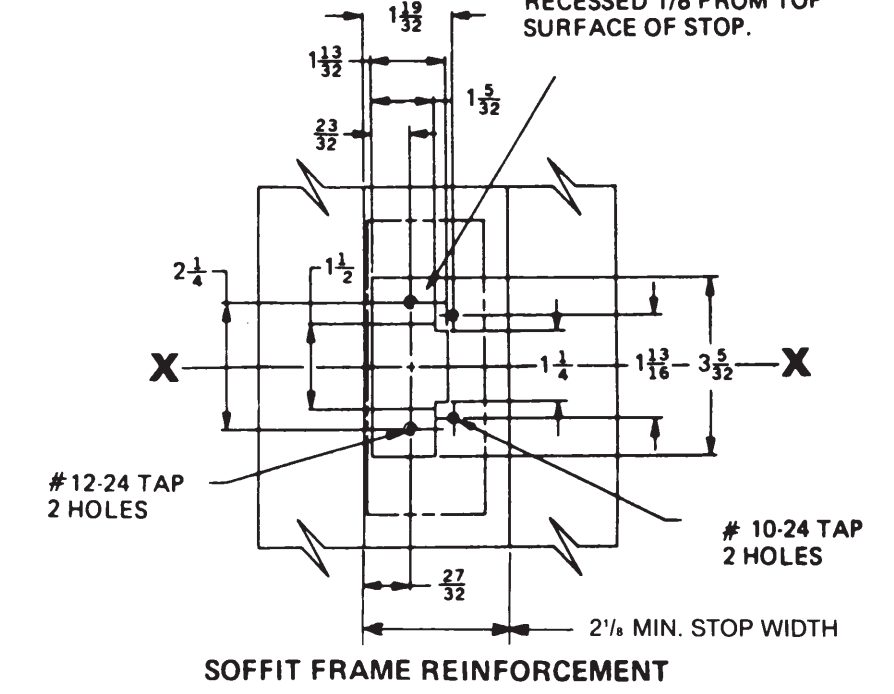

Customer Service

1-877-671-7011 www.allegion.com/us


UL LISTED FIRE EXIT HARDWARE

DESCRIPTION


8827TP-F SURFACE APPLIED DEVICE

VON DUPRIN


DIRECTION NUMBER 911165-00 (b) DATE 06/14

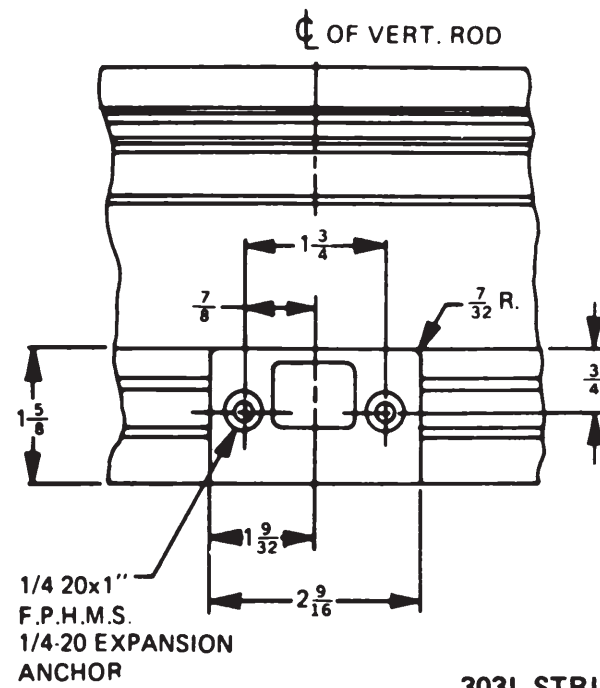


303L STRIKE APPLICATION

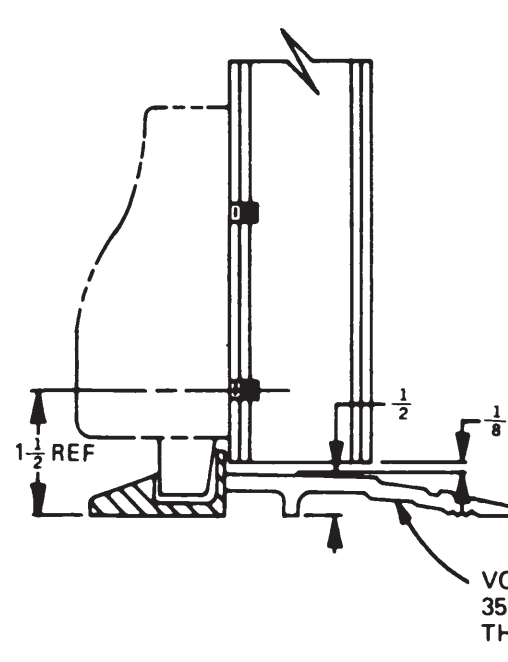


304L STRIKE APPLICATION

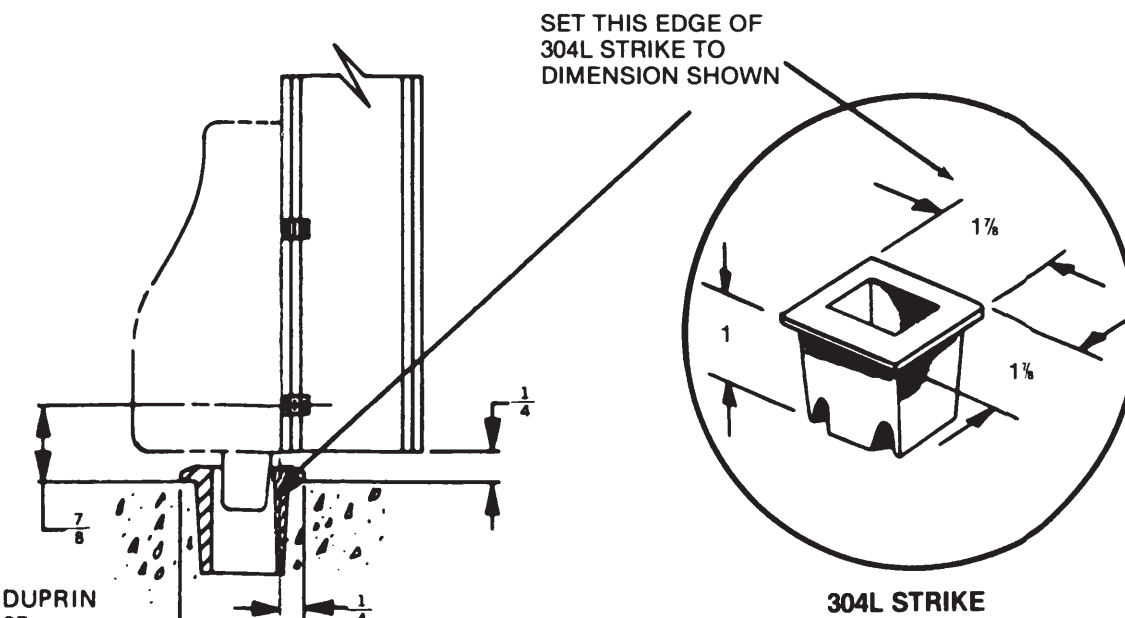


304L STRIKE

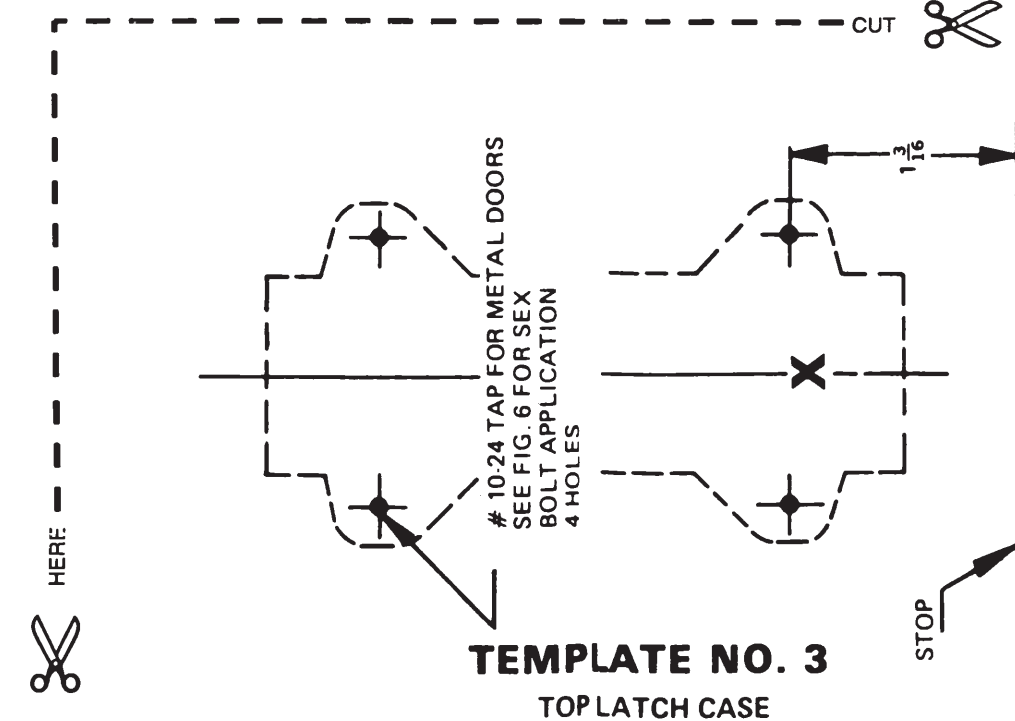


TEMPLATE NO. 3
TOP LATCH CASE

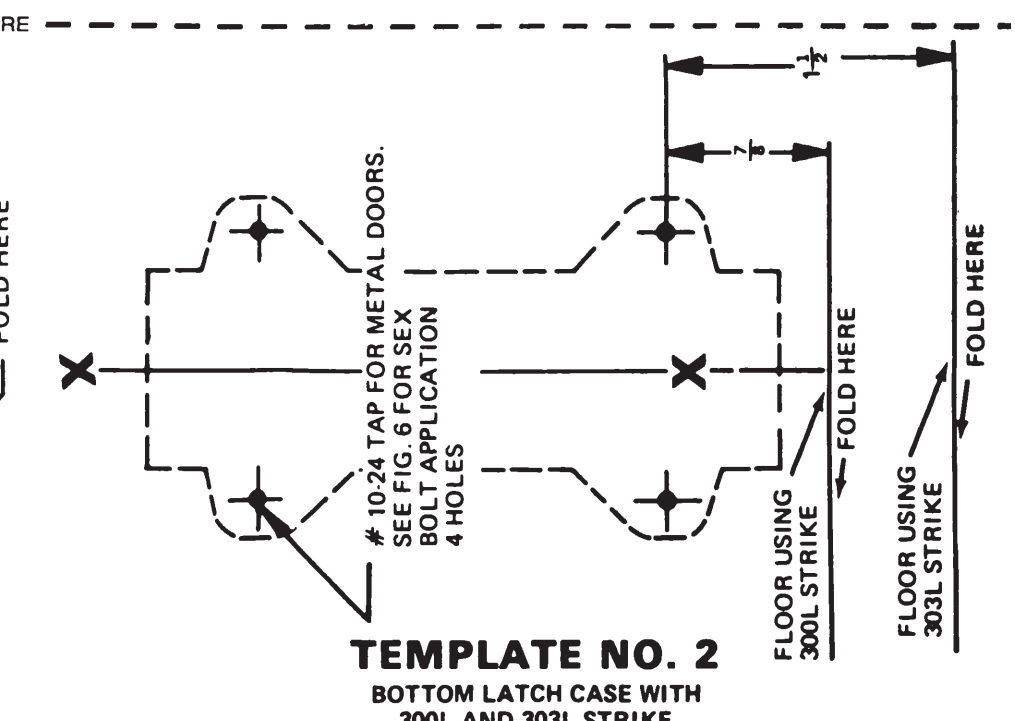

TEMPLATE NO. 2
BOTTOM LATCH CASE WITH
300L AND 303L STRIKE

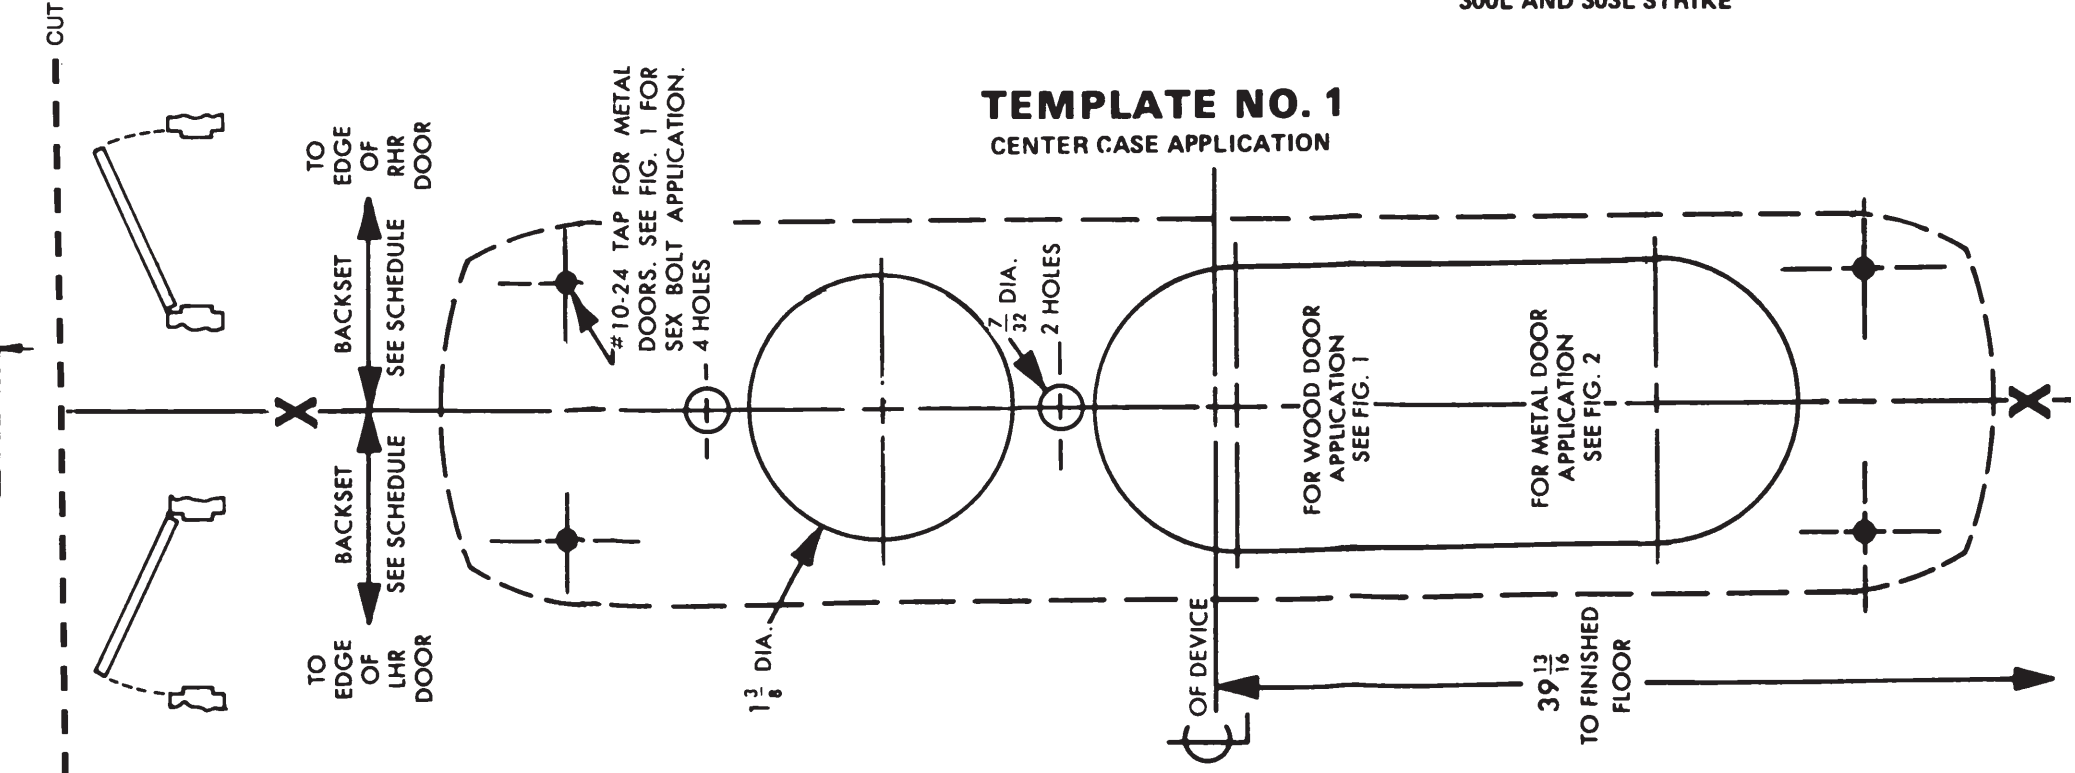

TEMPLATE NO. 1
CENTER CASE APPLICATION

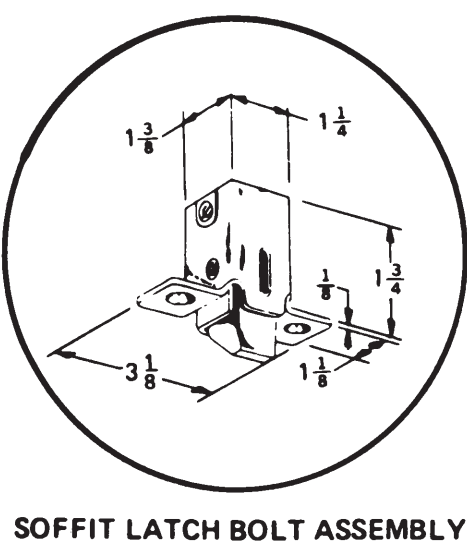

SOFFIT LATCH BOLT ASSEMBLY

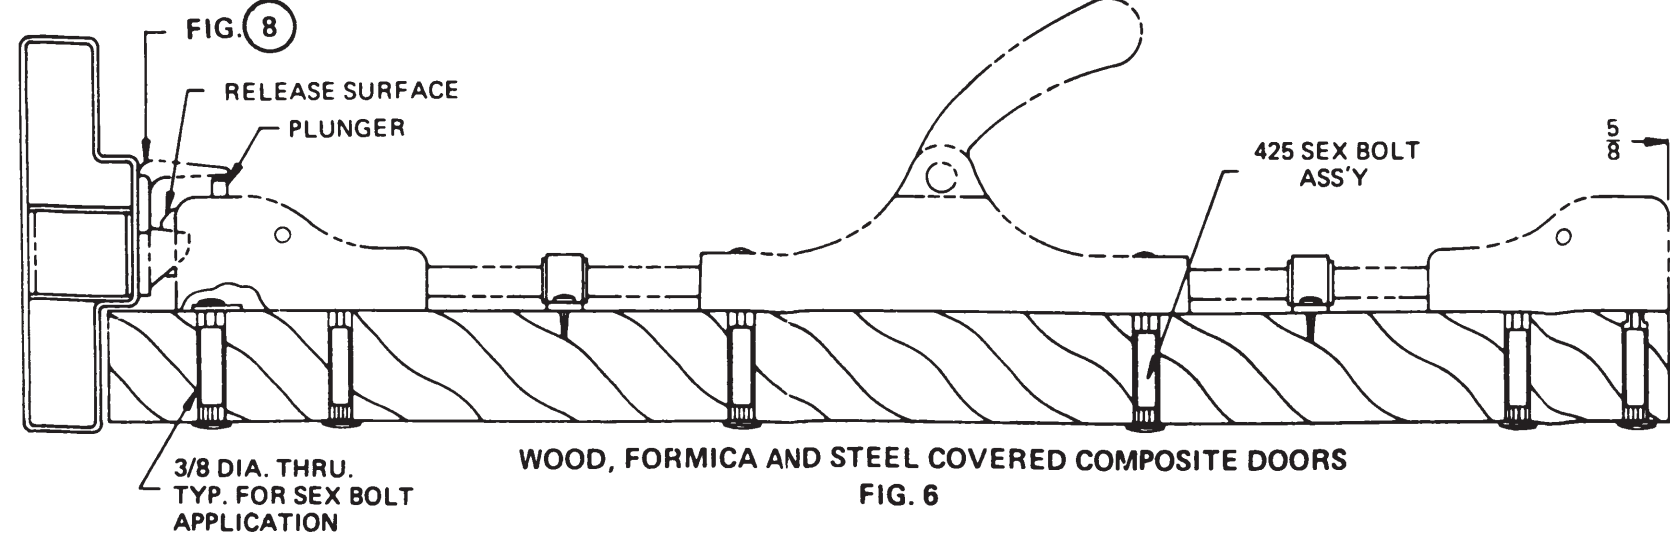


FIG. 6