



APPLICATION	PREPARATION
990 TRIM APPLICATION	1/4" DIA THIS SIDE 13/32" DIA OPPOSITE SIDE 4 PLACES

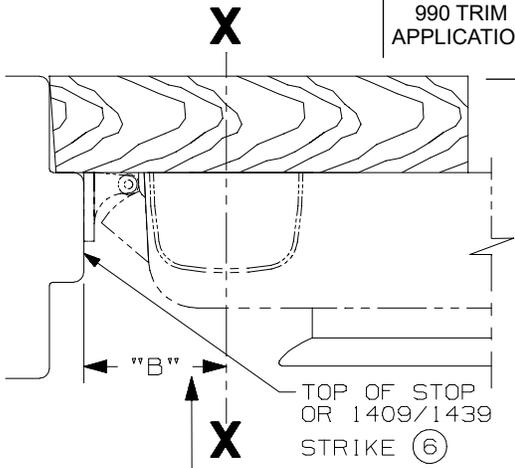

SINGLE DOOR INSTALLATION		
STRIKE	DIM. "B"	MIN. STILE
299/299-F	2 3/8"	4 1/2"
1409/1439	1 9/16"	3 13/16"
1606	1 15/16"	4 1/16"

3/16" DIA THRU TO CYLINDER CUTOUT

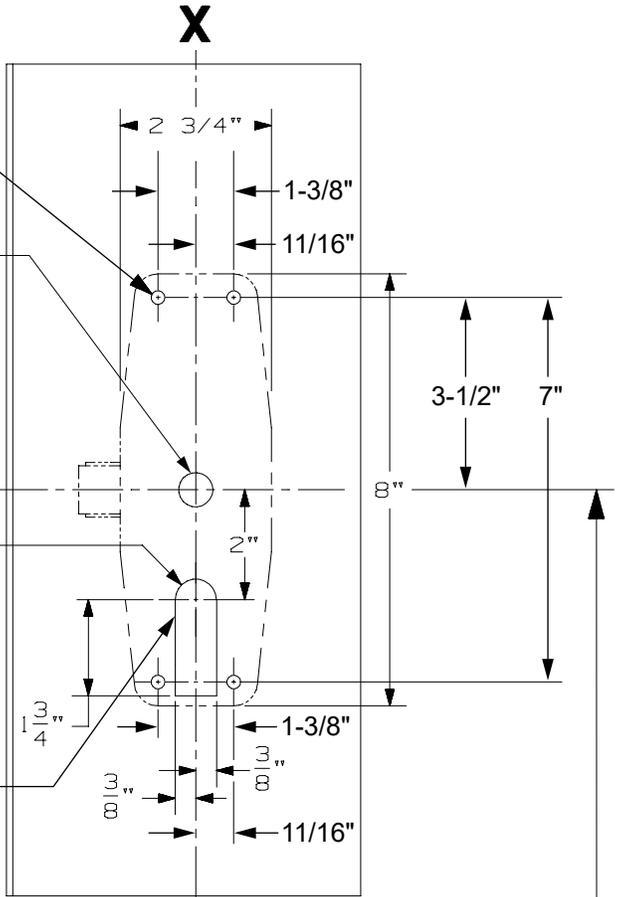


CL DEVICE  
3/4" DIA

SLOT THRU TO TRIM CUTOUT

INSIDE FACE OF LOCK STILE LHR DOOR

CL OF OPENING

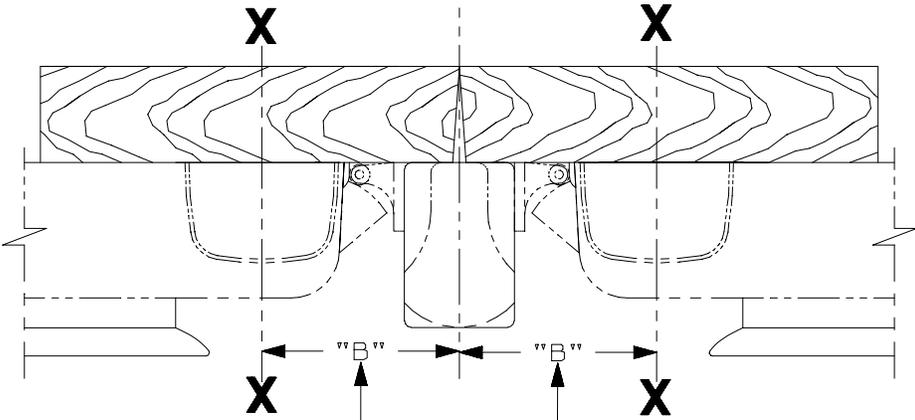

SINGLE DOOR OPENING  
39 13/16" TO FINISHED FLOOR

DOUBLE DOOR OPENING  
WITH VON DUPRIN MULLION  
39 11/16" TO FINISHED FLOOR

LHR SHOWN  
RHR OPPOSITE

REMOVE GLASS STOP OR BEAD IN AREA OF DEVICE IF REQUIRED UNLESS GBK IS USED.

- NOTES:**  
1. MOUNTING HOLES TO BE PREPARED AT INSTALLATION ON DOOR.

DOUBLE DOOR INSTALLATION WITH VON DUPRIN MULLIONS			
MULLION	STRIKE	DIM. "B"	MIN. STILE
4954	299	3 3/8"	4 7/8"
9954	499-F	3 1/2"	5 "
5654	299	2 15/16"	4 3/8"
5754	1408	2 1/8"	3 13/16"
1654	1606	2 15/16"	4 3/8"

FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED, SEE ADDITIONAL TRIM TEMPLATE

98/99-2 & 98/99-2-F TP, K, & L Series  
98/99-2SI & 98/99-2SI-F TP, K, & L Series  
Rim Device (Wood Door)

**VON DUPRIN®**

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

W10322\_e

DATE:  
05-02-22