



2720 Tobey Drive, Indianapolis, IN 46219
 Tel 1-877-671-7011 ■ Fax 800-851-0000
 Zero.Customer.Support@allegion.com
 www.zerointernational.com

Part No:

564

Part description:

Rabbeted threshold

Notes:


Provided by:

Customer name:

Job no:

Date:

Image may not be shown to scale

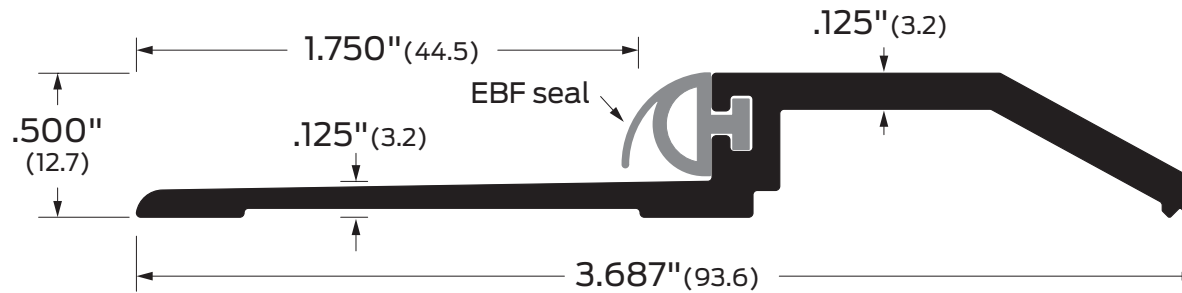

Notes:

Suitable for sound control applications and OEM use.
 Neoprene extruded bulb/finger for double-sealing protection.

Certifications:

- Fire rated-UL10c
- Air Infiltration
- Sound

ANSI/BHMA:

564A, 564D, 564G, 564BK	J36300
564A-E, 564D-E, 564G-E, 564BK-E	J36400
564B	J16300
564B-E	J16400



Finishes:

- A** Aluminum mill finish
- BK** Aluminum black anodized
- D** Aluminum dark bronze anodized
- G** Aluminum gold anodized
- B** Bronze, architectural mill finish
- B-ORB** Oil-rubbed bronze

Options:

- E** Epoxy abrasive tread
- EL** Photoluminescent and abrasive epoxy tread
- V3** Full body strength fill
- EV3** Epoxy and full body strength fill
- ELV3** Photoluminescent and abrasive epoxy tread, full body strength fill

(not available for B-ORB finish)