



XE360™ Series

Wireless Exit Trim



Note: Exit device sold separately

Overview

Building upon the innovation and reliability of Schlage electronic locks, the XE360 Series is the next generation of wireless locks from this trusted brand. The wireless exit trim is compatible with rim and surface vertical rod exit devices from Falcon and Von Duprin, and suites flawlessly with the XE360 tubular and mortise chassis to ensure an aesthetically consistent property.

XE360 currently works within No-Tour or offline access control systems. Credential support includes smart, Bluetooth and NFC mobile¹.

The open architecture design of the XE360 allows it to be managed by Allegion software or be integrated into popular physical access control and Proptech systems through our [PACS Alliance](#) program. This enables customers to choose what best fits their requirements now and transition to another solution at any time.

Encryption Key & Credential Interoperability

- Hardware configured with our default encryption key or custom key developed by Schlage Custom Encryption Key Service (SCEKS) including NXP and NFC
- Schlage MIFARE® DESFire® and MIFARE Classic® credentials
- Schlage Mobile Bluetooth® Credential
- Other competitive credentials

Schlage Credential Services

- CardTrax™ credential format sequencing service offering industry standard formats
- Custom format development


Features & Benefits

- Next level design inside and out
 - Available for rim and surface vertical rod exit devices from Falcon and Von Duprin
 - Utilizes a modular adapter for simple transitions to a wide variety of exit devices
 - Credential support includes Schlage MIFARE®, Bluetooth® and NFC mobile¹
 - Advanced encryption keeps data and communications safe
 - Wireless configuration from connected smartphones and tablets
 - No-Tour or offline system capability
 - Ready for the future with the innovative Flex Module™ that allows for communication type, memory and encryption upgrades
 - Exceeds Grade 1 testing for exceptional quality and reliability
 - Open architecture – interoperable and simple for software alliances to integrate
 - Works seamlessly with other Schlage wireless locks, including Schlage Control²
 - Uniquely concealed key override standard on all locks
1. Use of mobile credential is dependent on availability of compatible mobile credential
 2. Check with your Proptech or PACS provider for specific support

CYBERSECURITY


Learn about Allegion's commitment

Exterior

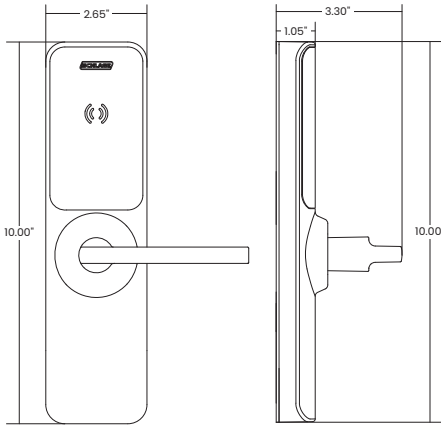


Interior

Rim



Surface vertical rod (SVR)

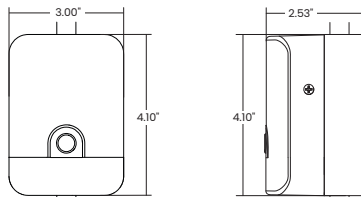

XE360 Wireless Electronic Lock Specifications

Users	2,000 ¹
Audits	2,000 ¹
Visual communications	LED (red, amber, green, blue)
Audible communications	Yes, field configurable
Communication and encryption standards – lock	Bluetooth® Low Energy (version 5) Advanced Encryption Standard (AES), 128- and 256-bit
Communication and encryption standards – mobile credentials	Bluetooth® Low Energy: AES 256-bit using CBC & ECDSA 256
Credential verification time	Smart: ≤ 1 second Mobile: mobile device dependent
System interface	Via Bluetooth using the ENGAGE mobile app compatible with iOS and Android
Battery life ²	Up to two 2 years 4 AA batteries, included
Operating temperature	Exterior: -31° to 151°F (-35° to 66°C) Interior: 32° to 120°F (0° to 49°C)
Operating humidity	0 - 100% non-condensing
Certifications	ANSI/BHMA A156.3-2020 Grade 1; ANSI/BHMA A156.25-2023 Locked Outdoor Type; ANSI/BHMA A156.5-2020; UL 294; ULC 60839; UL 10C 3-hour; CAN/ULC S104 3-hour; FCC Part 15; Industry Canada (IC); Industry Canada (IC)-RSS210; ADA Compliant ³ ; RoHS; REACH; TAA

Functionality⁴

- With Indicator (I)
 - Storeroom
- With Button (B)
 - Office
 - Privacy
 - Apartment

Available Status Signals⁴


- Battery level
- Door position
- Lock/unlock
- Request-to-exit⁵

Connectivity Options

- Mobile (Bluetooth at the lock)
- No-Tour⁶

Note: Door Position Sensor is recommended for privacy and apartment functions

Profile - with Falcon 25 Rim

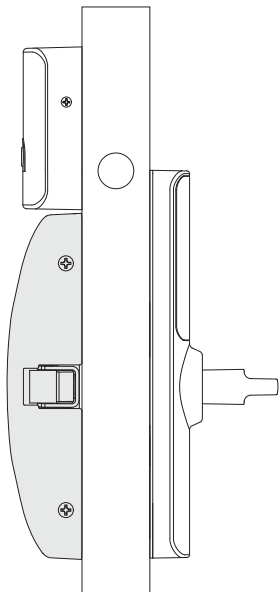

1. Maximum storage capacity of lock; can vary by access control software
2. Assuming default settings, 40 actuations per day
3. See 'Lever Styles' section for available options
4. Consult your access control software provider for specific scope of support
5. Exit compatibility - supports both Low Current (RX-LC) and Normal versions (RX) of REX switch
6. With MT20W and smart credential or mobile credential (consult your access control software provider for specific support)

XE360 Exit Trim Mechanical Specifications

Chassis	Exit trim, wide stile
Handing	On-site handing with included hex key
ANSI standard (Meets or exceeds)	ANSI/BHMA A156.13-2020 Grade 1 ANSI/BHMA A156.25-2023 Locked outdoor type ANSI/BHMA A156.5-2020
Door thickness	1-3/4" (44mm)
Backset	Defined by exit device
Latchbolt	Defined by exit device
Strike	Defined by exit device
Levers	Zinc
Stile width	Minimum 4-1/4" (108mm)
Materials	All-metal chassis and escutcheon; exterior polycarbonate elements
Cylinder and keys	Schlage Classic C keyway, Conventional 6-pin cylinder with two keys

Reader Specifications

Credential technologies	Smart (13.56 MHz), Bluetooth Low Energy (LE) (2.4 GHz), and Near Field Communication (NFC)
Standards	ISO standard 15693 and ISO 14443
Read range	Smart: up to .5" Bluetooth® Low Energy: up to 15' NFC: mobile device dependent
Smart credential support	Secure application area: Schlage MIFARE Classic®, Schlage MIFARE® DESFire® EV1/EV2/EV3 CSN only: HID iCLASS®, HID iCLASS SE®, MIFARE Classic/DESFire
Mobile credential support ¹	Schlage Mobile Bluetooth Credential, Integrated PACS mobile credential with Bluetooth, Apple Wallet® NFC student ID and employee badge; Google Wallet™ NFC student ID and employee badge

Exit Device Compatibility

The XE360 exit trim is currently compatible with rim and surface vertical rod styles of the following exit devices:

- Falcon 25
- Von Duprin 98/99; XP98/99 rim
- Von Duprin 22

Chassis Options

The XE360 Series portfolio offers tubular, mortise, mortise deadbolt and exit trim solutions to fit the needs of most applications.

Key Override

Key override is standard on all XE360 locks. The unique design conceals the cylinder in the bottom edge of the lock to preserve the sleek look on the door while still allowing emergency access using a key.



¹ Dependent on PACS provider capabilities. Visit us.allegion.com/alliances for more information

Ordering Information

XE360 - EW - 25R - OF - I - SM - LAT - 626 - P6 - C - 134

Series	Chassis	Exit Trim Adapter	Class	Function	Reader	Lever Style	Finish	Key Cylinder	Keyway	Door Thickness
1	2	3	4	5	6	7	8	9	10	11

Selections correspond with the numbers above. See price book for specific configuration options.

3 Exit Trim Adapter

25R	Falcon 25 rim
25S	Falcon 25 surface vertical rod
99R	Von Duprin 98/99 or XP98/99 Rim
99S	Von Duprin 98/99 surface vertical rod
22R	Von Duprin 22 rim
22S	Von Duprin 22 surface vertical rod

5 Function

I	Indicator
B	Button

6 Reader

SM	Smart; Bluetooth and NFC mobile
----	---------------------------------

7 Lever Style

BRW	Broadway
LAT	Latitude
NEP	Neptune
LON-E	Longitude-extended length

8 Finish

619	Satin Nickel
622	Matte Black
626	Satin Chrome

Note: Interior finish of Exit Trim device will always be 622 Matte Black

9 Key Cylinder

P6	Schlage Conventional, 6-pin
----	-----------------------------

10 Keyway

C	Schlage Classic Obverse
---	-------------------------

11 Door Thickness

134	1-3/4" only
-----	-------------

Lever Styles



Broadway

Latitude

Neptune (Sparta)

Longitude - Extended Length

Extended length lever is designed to lower required operational force and improve rotational grip for higher accessibility.

Finishes



619
Satin Nickel

622
Matte Black

626
Satin Chrome