SCHLAGE

Gateway (RS-485) integration for NDE and LE wireless locks

Max 17 total

Max 8

Ethernet

RS-485

BLE

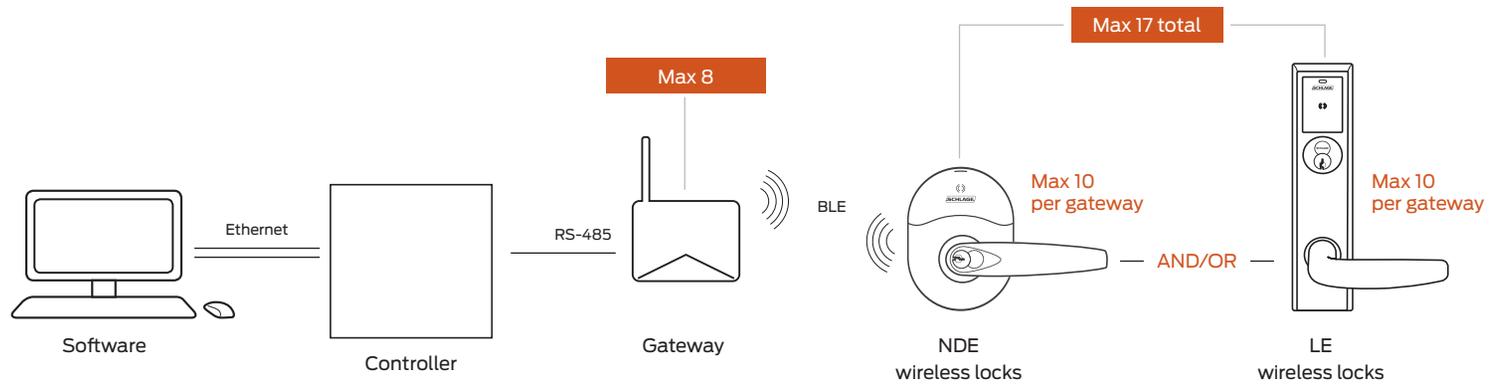Max 10 per gateway

Max 10 per gateway

AND/OR

Software

Controller

Gateway

NDE wireless locks

LE wireless locks

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.

ALLEGION