SCHLAGE

Gateway (RS-485) integration for NDE and LE wireless locks

Max 16 per RS485

Max 16

RS-485

BLE

Max 10 per gateway

AND/OR

Max 10 per gateway

Gateway

NDE wireless locks

LE wireless locks

Ethernet

Software

Controller

Max 16 per RS485

Max 16

RS-485

BLE

Max 10 per gateway

AND/OR

Max 10 per gateway
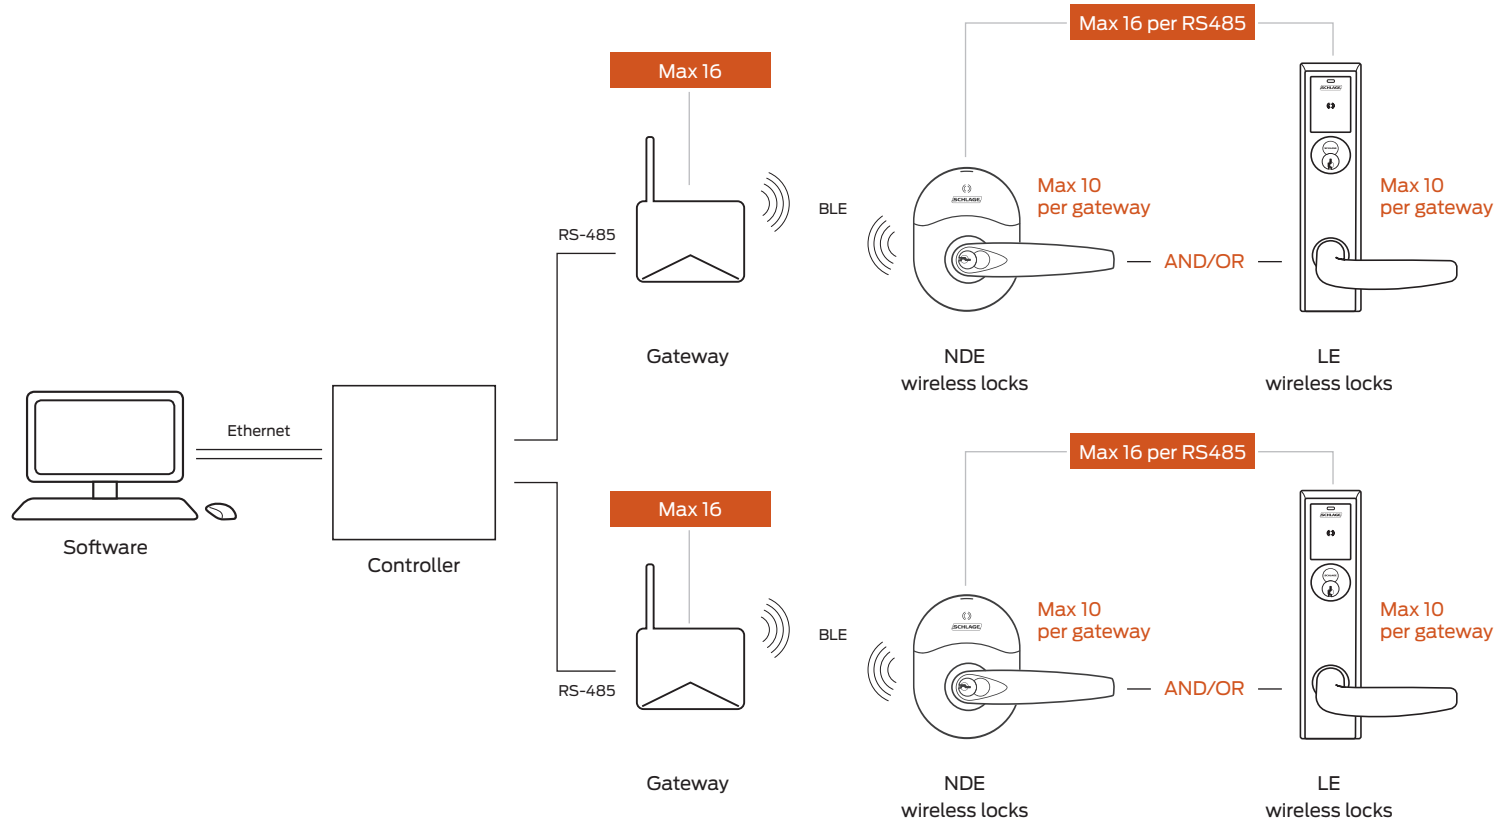
Gateway

NDE wireless locks

LE wireless locks

Although not specifically addressed on this document, AD Series locks are also supported. See separate AD Series integration for details.

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.

ALLEGION