



921274-00

Trim

991K-DT/K-Rigid & 992L-DT/L-Rigid

VON DUPRIN®

Installation Instructions


1. Prepare door for exit device or 330/350 Push Bar. See exit device or 330/350 Push Bar instructions for holes and center lines.
2. Prepare door for trim:
 - A. Transfer vertical center line (line X-X on exit device instructions) from inside to outside of door. Use extra care if edge of door is beveled. Be sure center line is parallel to edge of door.
 - B. Locate and prepare holes as shown at far right.
3. Change trim handing if necessary.
4. For RIGID trim, install cylinder.
5. Apply trim.
6. If using exit device, apply exit device and thru-bolt to trim (4 places).

If using 330/350 Push Bar, use screws with #10 countersink washers for all trim mounting studs.


TO CHANGE HANDING

1. Remove retaining ring from end of lever shaft.
2. Loosen the two set screws.
3. Remove yoke.
4. Rotate lever to LHR or RHR position and reassemble.


NOTE
Yoke may have to be forced over shaft when reassembling.

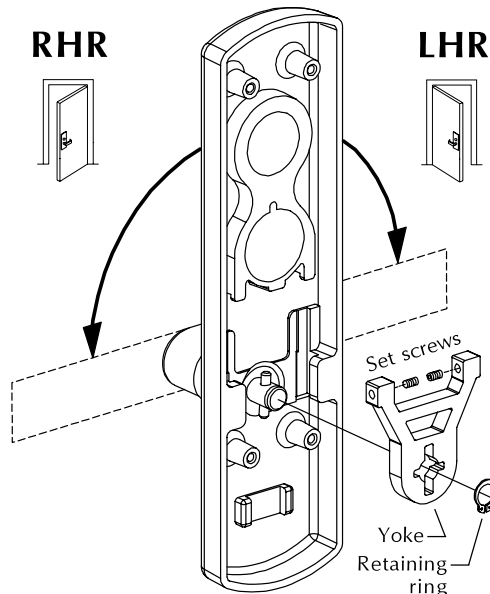

TO INSTALL CYLINDER

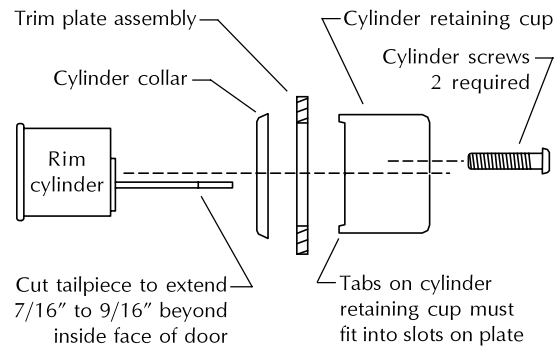

Line X-X corresponds to line X-X (vertical center line) on exit device instructions and to vertical center line on 330/350 Push Bar instructions

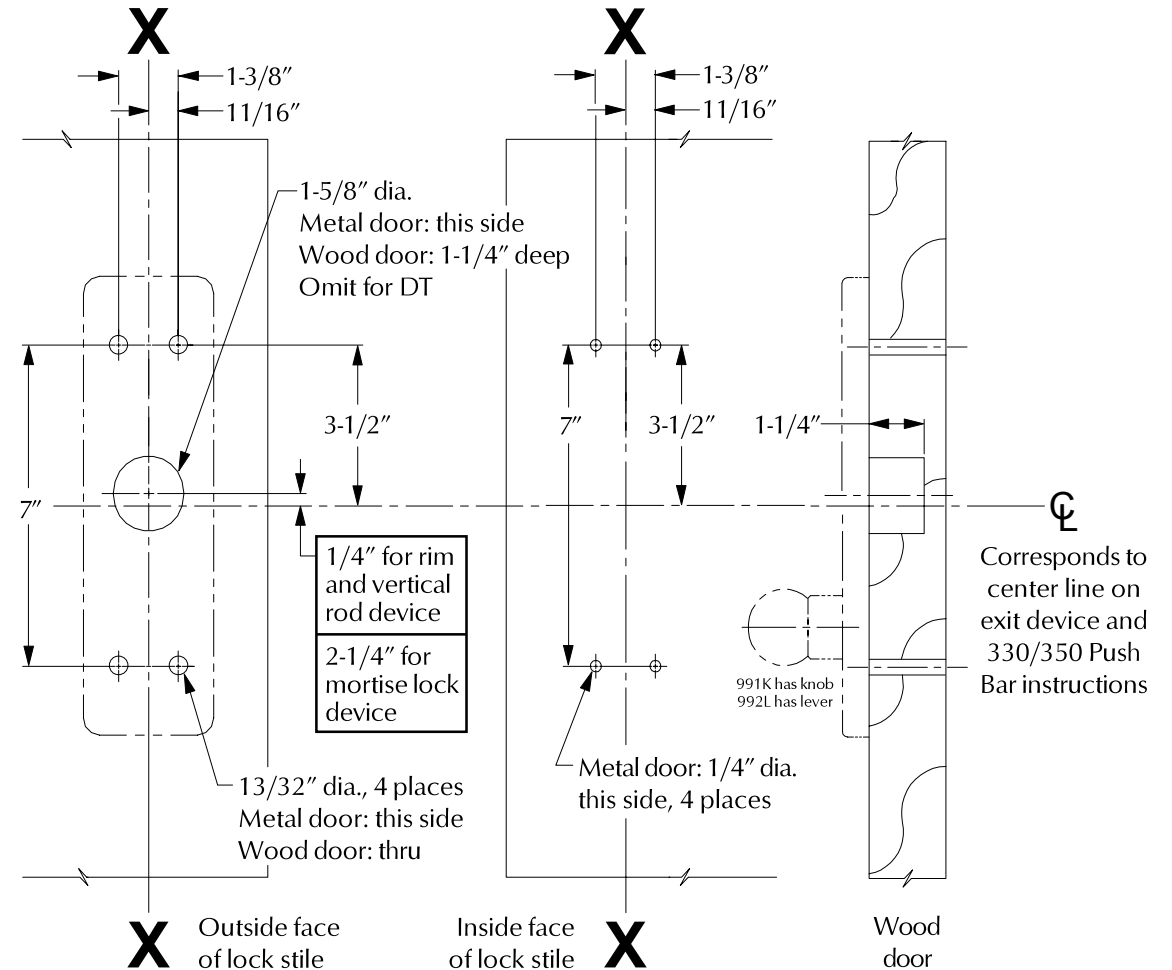

For cutouts on inside (exit device side) of door, see exit device instructions

LHR shown, RHR opposite

Customer Service
1-877-671-7011 www.allegion.com/us



© Allegion 2014
Printed in U.S.A.
921274-00 Rev. 01/14-b