



# 650 Series

## Keyswitches



### Overview

Schlage 650 Series keyswitches utilize an innovative magnetic spring design which allows installers to configure both clockwise and counterclockwise key turn direction as well as momentary or maintained action in seconds. Single gang and narrow stiles are available with numerous options which include heavy-duty plate, weather resistant cover (single gang size only), 2 LED lights – green/red, anti-tamper switch and Schlage Everest cylinder. In addition to the standard (630) satin stainless steel finish, there are three additional architectural finishes to choose from.

### Features & Benefits

- Easy to install and maintain
- Single gang and narrow stile offer ultimate flexibility
- Patented magnetic spring design allows installers to configure momentary to maintained action in seconds
- UL 294 Listed

### 650 Series Specifications

Switch contact rating	5 amp @ 30 VDC
	SPDT contacts

ATS switch closes when cover is on 0.025A@28VDC

LED indicator lights operate at 12/24 VDC 0.500A @ 30VDC

## Ordering Information

- **653-04** - SPDT maintained single direction
- **653-05** - SPDT momentary single direction
- **653-14** - DPDT maintained single direction
- **653-15** - DPDT momentary single direction
- **653-1414** - (2) DPDT maintained bi-direction
- **653-1415** - DPDT maintained x DPDT momentary
- **653-1515** - (2) DPDT momentary bi-direction
- **653-041** - SPDT maintained x key remove one position
- **653-0404** - (2) SPDT maintained bi-direction
- **653-0405** - SPDT maintained x SPDT momentary
- **653-141** - DPDT maintained x key remove one position
- **653-0505** - (2) SPDT momentary bi-direction

## Options

- **L2** - Two LEDs (red/green), dual voltage
- **NS** - Narrow stile - stainless steel plate (1-3/4" x 4-1/2")
- **ATS** - Anti-tamper switch
- **WP** - Weather-resistant cover fits 1-1/8" cylinder only (not available with NS and L2 options)
- **CYL** - 1-1/4" Schlage Everest® mortise cylinder and 1/8" spacer ring (keyed different)
- **CYL-KA** - 1-1/4" Schlage Everest mortise cylinder and 1/8" spacer ring (keyed alike)

## Finishes

- **630** - Satin finish on .035 stainless steel (standard)
- **SF-626** - Satin Chrome on heavy-duty zinc
- **SF-613** - Oil Rubbed Bronze on heavy-duty zinc
- **SF-625** - Bright Chrome on heavy-duty zinc


Note: 650 Series keyswitches operate with either a 1-1/8", 1-1/4", 1-3/8", or 1-1/2" cylinder having a straight type cam.

- 1-1/8" mortise cylinder fits direct in key switch - no blocking ring required.
- 1-1/4" cylinders require a 1/8" blocking/spacer ring, Schlage part number 36-079-012 or equivalent (included with the CYL and CYL-KA options).
- 3/8" mortise cylinder housing for SFIC cores - requires 1/4" blocking ring Schlage part number 36-079-025 or equivalent.
- 1-1/2" mortise cylinder housing for FSIC cores - requires 3/8" blocking ring Schlage part number 36-079-037 or equivalent.


All cylinders, except 1-1/4" as CYL or CYL-KA options, must be ordered separately.

## Innovative magnetic spring technology allows installers to configure models in seconds

### Momentary action

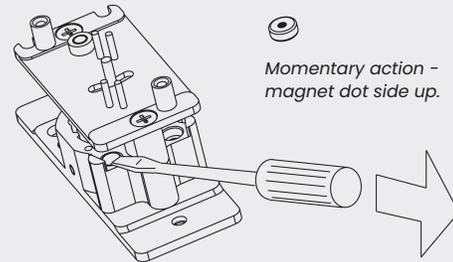

### Maintained action

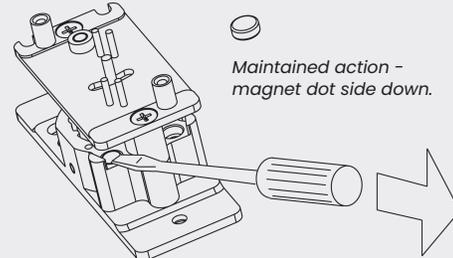

Allegion, the Allegion logo, Schlage and the Schlage logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.