

M450/452

Electromagnetic Locks



Overview

M400 Series electromagnetic locks from Schlage are designed with the customer in mind to be robust, easy-to-install, and secure. The unique bayonet mounting feature makes installation easier, allowing the installer to have their hands free during the mounting process.

All M400 Series electromagnetic locks are symmetrical with field-selectable handing, allowing optimum placement of the magnet, no matter the application. They are designed to provide automatic voltage sensing for 12 and 24 volts along with polarity protection to make wiring less complex. M450 models are tested and certified to meet or exceed UL 1034 and BHMA 1000 lb hold force requirements.

The M450 electromagnetic locks come in four configurations to meet your specific security needs. Single and double door models are offered in standard configurations. Plus versions of these models with “P” designations add intelligent sensing and reporting features needed to integrate with access control systems along with additional available options. Kits are also available for top jamb, double door, and glass door applications.

Features & Benefits

- 1000 lb. hold force rating for high security applications
- “Plus” models offer magnetic bond sensor (MBS), adjustable relock time delay (RTD) and door position switch (DPS)
- Automatic voltage selection (AVS)
- Symmetrical design with field-selectable handing for optimum placement
- Bayonet mount simplifies installation by eliminating the need to hold lock overhead while securing
- Armature mount pivot feature compensates for slight opening imperfections
- Optional mounting kits available for top jamb mount, double door and HERCULITE® brand glass doors
- Aluminum housing in 628 satin finish
- ANSI/BHMA 156.23 Grade 1, UL 1034, UL 10C, UL 294, cUL, CFSM certifications
- Limited lifetime warranty on magnetic coil assembly

Additional Features

All Models

- Automatic Voltage Selection (AVS) senses the voltage applied to the lock and responds accordingly

M450P/M452P

- Magnetic Bond Sensor (MBS) monitors the strength of the bond between the lock and armature so you know the door is secure
- Door Position Switch (DPS) monitors whether the door is open or closed
- Relock Time Delay (RTD) provides a relock delay that is adjustable from 1 to 30 seconds


Optional accessories (P models only)

- ATS/LED Combines anti-tamper switch (ATS) with magnetic bond sensor in one kit
 - ATS provides an indication that the cover of the magnet is securely fastened to the lock and that the on board circuitry is secure
 - Magnetic bond sensor indicator (LED) provides visual indication of magnetic bond at the lock


Optional accessories (for all)

- Glass door bracket kit designed for use with HERCULITE® brand glass doors
- Top jamb (inswinging doors) kit
- Double door connector kit (converts two single magnetic locks to a double)

Filler plate

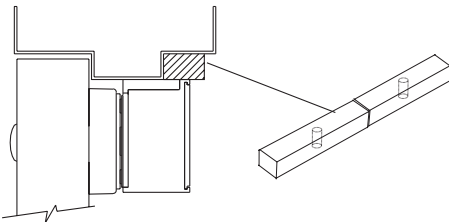

Angle bracket

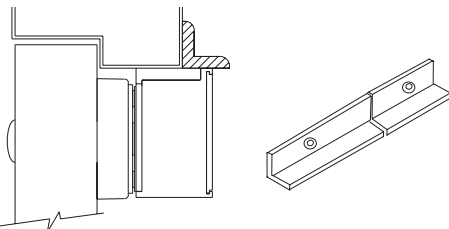

M450/M452 Electromagnetic Lock Specifications

Specification	M450/M450P	M452/M452P
Holding force	Meets or exceeds BHMA standard of 1000 lbs.	1000 lbs. per door leaf
Door type	Single	Double
Input voltage (auto selected)	12/24 VDC	12/24 VDC
Current draw	.75A @ 12 VDC .38A @ 24 VDC	1.5A @ 12 VDC .75A @ 24 VDC
Height	3"	3"
Length	10-1/4"	20-9/16"
Depth	1-3/4"	1-3/4"
Weight (approximate)	10 lbs.	20 lbs.
Certifications	UL 1034, UL 10C, UL 294, ANSI/BHMA156.23, cUL, CSFM	UL 1034, UL 10C, UL 294, ANSI/BHMA156.23, cUL, CSFM
Temperature	0° to 49°C (32° to 120° F)	0° to 49°C (32° to 120° F)
Wire gauge	14-22 AWG	14-22 AWG

Filler Plates and Angle Brackets Specifications

Filler Plates

Width x Height	Length	Plate No.
1-1/4" x 1/8"	10-1/4"	4501F
1-1/4" x 1/4"	10-1/4"	4502F
1-1/4" x 3/8"	10-1/4"	4503F
1-1/4" x 1/2"	10-1/4"	4504F
1-1/4" x 5/8"	10-1/4"	4505F
3/4" x 1/2"	10-1/4"	4506F
3/4" x 5/8"	10-1/4"	4507F
3/4" x 3/4"	10-1/4"	4508F

Angle Brackets

Width x Height	Length	Bracket No.
1" x 1"	10-1/4"	4501A
1-1/2" x 1"	10-1/4"	4502A
1-1/2" x 1-1/2"	10-1/4"	4503A
1-1/2" x 2"	10-1/4"	4504A
1-1/2" x 2-1/2"	10-1/4"	4505A