

MultiPoint Lock Tornado


for tornado storm shelter applications

Overview

MultiPoint Lock Tornado is an integrated door, frame, and three-point lock solution specifically designed to meet FEMA 320/361 Guidelines and ICC 500 standards for protection in tornadoes. The patented system secures the door at three locations - the top, bottom, and center latch points - and has been tested to withstand the most powerful EF5 tornadoes, providing protection from winds up to 250 mph and 15 lb. projectile impacts up to 100 mph.

Features and benefits

- Six available functions supporting a wide range of applications
 - Passage, exit, storeroom, classroom, classroom security, and office/inner entry functions
 - VandlGard® available for additional protection from forced entry
- Compatible with all Schlage Mortise lock key systems
 - Standard, FSIC and SFIC key systems available
 - Patented key systems, including Everest 29™ with patented keyway through 2029
- Compatible with all Schlage L Series Mortise trims and finishes
 - 31 lever designs allow complete suiting with Schlage L Mortise and LT Tubular locks along with Von Duprin exit devices.
 - Sectional (rose) or escutcheon trim
 - 13 different finishes
- Seamless operation
 - FEMA/ICC compliant when door is shut - no secondary operation required
 - Handle rotation retracts all three latches; closing door re-engages all latches
- Simple installation
 - Vertical rods pre-assembled and factory installed in door
 - Mortise lock can be installed/removed with door installed
- Multiple door configurations available (for use with Steelcraft Paladin door and frame systems only)
 - 2' 6" x 6' 8" minimum to 4' 0" x 8' 0" maximum single door (inswinging or outswinging)
 - 5' 0" x 6' 8" minimum to 8' 0" x 8' 0" maximum pair doors (inswinging or outswinging)
- Certifications
 - UL approved to FEMA 361 and FEMA 320 guidelines and ICC 500 test standards for inswinging and outswinging single and pair of doors
 - UL10C 3 hour fire rating available

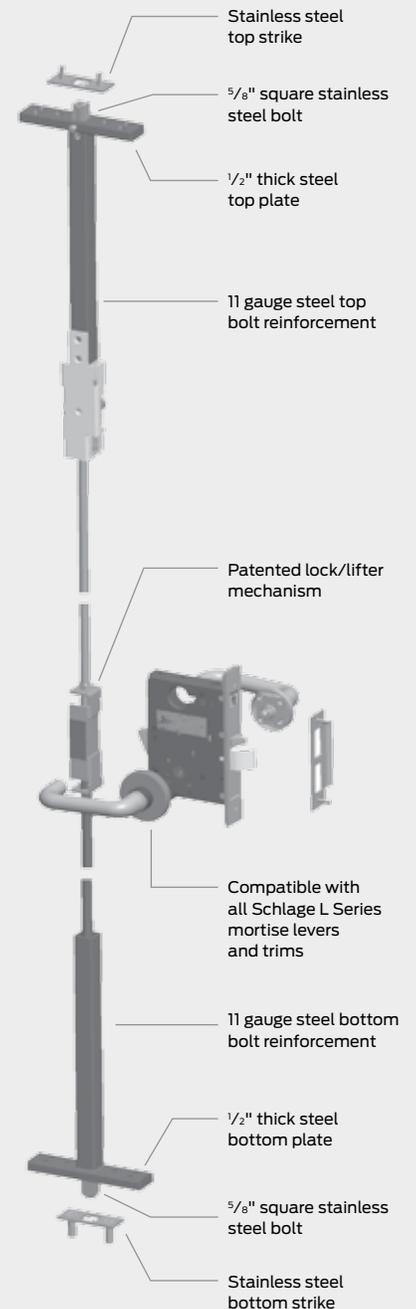

Note: This datasheet is for MultiPoint Lock Tornado only. For information on MultiPoint Lock Tornado Storm Shutter, Hurricane, or High Security solutions, visit www.allegion.com/us.

Ordering guidelines

The MultiPoint Lock Tornado solution requires separate orders for the lock, door (includes the vertical rods), frame and miscellaneous hardware.

MultiPoint Lock Order from Schlage using the Schlage order form as follows:

Function	Trim	Finish	Handing	Options
LM9350P	03A	626	RHR	XLxx-xxx

Lock specifications

Function*	LM9310 (passage), LM9325 (exit), LM/LMV9350 (office/entry), LM/LMV9370 (classroom), LM/LMV9371 (classroom security), LM/LMV9380 (storeroom)
Trim**	All L Series levers, knobs, roses, and escutcheons available
Finish**	All L Series finishes available
Handing	LH, LHR, RH, RHR (Note: must specify handing on order)
Options	All L Series options available except electrified

All other lock parameters pre-defined as part of MultiPoint Lock Tornado solution, no value required.

*Include cylinder suffix when ordering function. Less cylinder not available on storeroom function. LMV refers to Vandlgard® free-wheeling outside trim option.

**Not all lever/knobs available in all finishes; consult price book or customer care.

MultiPoint Tornado Door Order from Steelcraft using the Steelcraft door ordering form as follows (includes vertical rods):


Door type	Width	Height	Hand	Lock prep	Closer prep	Labels	Hinge prep	Inactive leaf	Floor clear
PW	8'	8'	RHR	LM9350 rose	Standard	UL 3 hour	5"	Inactive	1/4"

Door specifications

Door type	PW Series (Paladin)
Width	2' 6" - 8' 0"
Height	6' 8" - 8' 0"
Handing	LH, LHR, RH, RHR
Lock prep	LM/LMV function, rose or escutcheon trim
Closer prep	Standard
Labels	Optional (UL 20 minute, 45 minute, 1 hour, 90 minute, 3 hour)
Hinge prep	4 1/2", 4 1/2" high frequency top hinge, 5", 5" high frequency top hinge, continuous (full mortise only)
Inactive leaf	Optional (inactive with or without Z astragal, wide inactive)
Floor clearance***	1/4", 3/8", 1/2", 5/8", 3/4"

All other door parameters pre-defined as part of MultiPoint Tornado solution, no value required.

*** Set floor clearance for 1/8" - 1/4" separation between top of strike and bottom of door.



MultiPoint Tornado Frame Order from Steelcraft using the Steelcraft frame ordering form as follows:

Frame series	Jamb depth	Width	Height	Hand	Strike prep	Closer prep	Labels	Hinge prep	Anchors	Head
FP	5 3/4"	8'	8'	LHA	LM9350, ASA	Regular	UL 3 hour	5"	EMA	4"

Frame specifications

Frame series	FP for Tornado applications
Jamb depth	5 3/4" - 10 3/4"
Width	2' 6" - 8' 0"
Height	6' 8" - 8' 0"
Handing	LH, RH for single door; specify active leaf for pairs (LHA, RHA)
Strike prep	LM/LMV function head and sill; ASA strike prep
Closer prep	Standard (specify regular or parallel arm)
Labels	Optional (UL 20 minute, 45 minute, 1 hour, 90 minute, 3 hour)
Hinge prep	4 1/2", 4 1/2" high frequency top hinge, 5", 5" high frequency top hinge, continuous (full mortise only)
Anchors	Wire, EMA, welded EMA
Heads	Optional (4", for new masonry wall construction only)

All other frame parameters pre-defined as part of MultiPoint Tornado solution, no value required.

Hinges, closers and surface bolts

Hinges must be heavyweight 4 1/2", 5" or continuous (Ives recommended). For inactive leaves, Ives SB360 surface bolts required.