




KICKPLATE TAPE

Recommended when applying solid brass kickplates to metal doors, serving as a gasket to reduce corrosion

NOTE: Under some exterior environmental conditions, such as high humidity or salt air content, brass plates applied to metal doors may experience corrosion taking place between two dissimilar metals.

Instructions:

1. Peel off adhesive backing and apply tape to the back of the kickplate as shown. NOTE: Tape must be placed at the edge of the kickplate, covering screw holes.

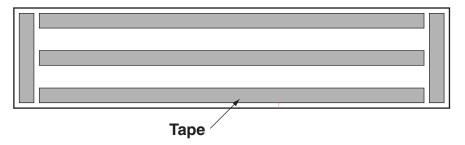

2. Mount plate following manufacturer's instructions.

This tape will reduce the occurrence of oxidation between a brass plate and metal door. Manufacturer assumes no responsibility for rusting on plate or door as a result of atmospheric conditions.

