

VR900/VR904



829562-00


Vandal Resistant Trim for use with Mortise Locks (on pull side of door)

Installation Instructions

1 Prepare door for mortise lock.


See mortise lock instructions for preparation.

Align trim template with horizontal cylinder center line (©) on pull side edge of door and secure with tape.




- 3 Mark the center point of each hole with a punch.
- 4 Using a square, transfer the 4 mounting hole locations to the opposite side of the door.


Hole dimensions and preparation are shown on template.

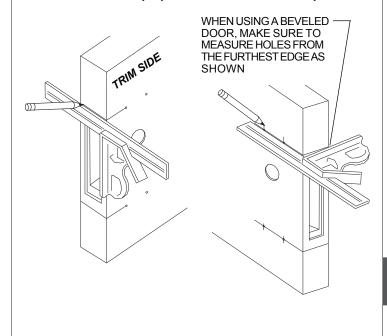


5 Locate and prepare all trim holes as shown on template.



6 Secure trim to pull side of door.

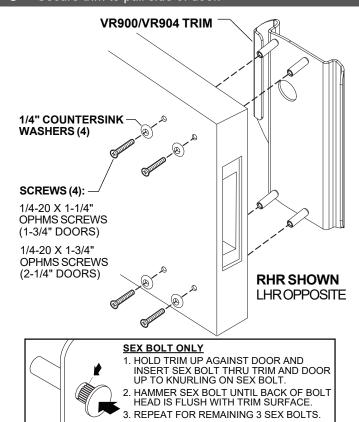

See mortise lock instructions for mortise lock and cylinder installation.




VR900LLP/VR904LLP




Vandal Resistant Trim for use with Mortise Locks (on push side of door)

Installation Instructions




See mortise lock instructions for preparation.

Align trim template with horizontal cylinder center line (©) on pull side edge of door and secure with tape.



- **3** Mark the center point of each hole with a punch.
- 4 Using a square, transfer the 4 mounting hole locations to the opposite side of the door.

Hole dimensions and preparation are shown on template.

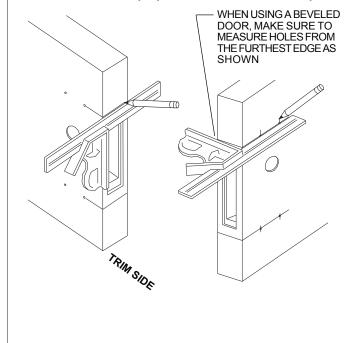


Customer Service


1-877-671-7011 ww

www.allegion.com/us


5 Locate and prepare all trim holes as shown on template.



6 Secure trim to pull side of door.

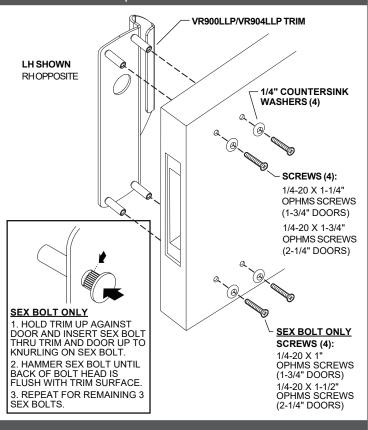

7 See mortise lock instructions for mortise lock and cylinder installation.





© Allegion 2020 Printed in U.S.A. 829562-00 Rev. 09/20-d