




18755

# 2010 Series


# LCN®

## Installation Instructions



### Instructions

1. Make sure hand of closer and door correspond. Hand of closer is stamped on finish plate. Hand of closer can not be reversed.
2. If door and frame are not prepared for closer and track, prepare to dimensions shown on other side.
3. Install closer in prepared frame with proper screws. Replace finish plate (or frame plate provided by frame manufacturer) and be sure plate is flush with soffit. Place arm on closer shaft and secure with shaft screw. Insert track roller in track. Install track level in door.
4. Hang door on butts. Be sure there is no bind or friction. Open door 45° and pull arm away from stop. Using allen wrench furnished, back out arm set screw to clear arm roller stud. **DO NOT DRIVE ARM DOWN OVER ROLLER STUD.** Lift end of arm up and over roller and gently fit roller stud into arm. Tighten self locking set screw.

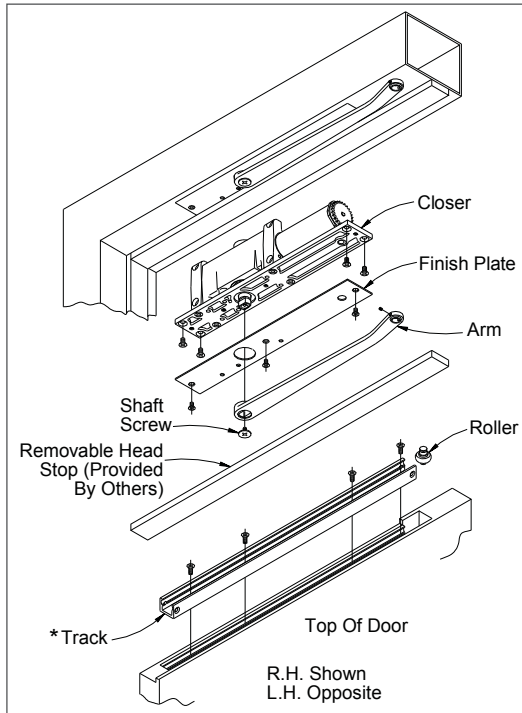


### CAUTION

Improper installation or regulation may result in personal injury or property damage. Follow all instructions carefully. For questions, call LCN at 877-671-7011

5. **IMPORTANT:** Closer has been regulated prior to shipment. Adjust regulation only if necessary. Use a 3/32" hex wrench and to adjust speed (see illustration). To slow main speed of door, turn regulating screw nearest shaft clockwise. To slow latch speed of door, turn regulating screw nearest hinge clockwise. **BACKCHECK** To increase backcheck intensity, turn regulating screw nearest latch clockwise.

① **Do not use abrupt backcheck- nor expect door closer to act as a door stop.**


**Customer Service**  
1-877-671-7011    www.allegion.com/us

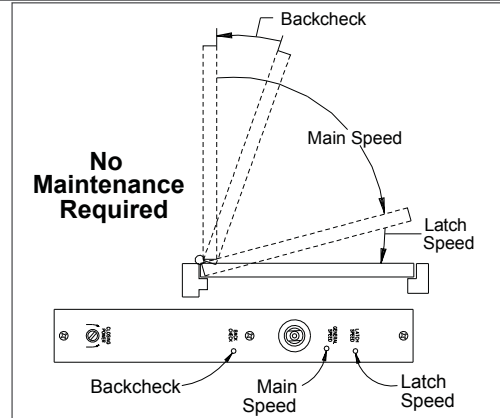

6. Adjust **CLOSING POWER** only if more power is needed. Closer is shipped with minimum closing power preset. To increase **CLOSING POWER** turn spring adjusting screw clockwise. Maximum adjustment is 18 turns.

Table of Sizes		
Maximum Door Width		
Exterior Doors	Interior Doors	Catalog No. of Closers
----		2011
30 (765 mm)	38 (965 mm)	2013
36 (915 mm)	48 (1220 mm)	2014
42 (1065 mm)	54 (1370 mm)	2015
48 (1220 mm)	60 (1525 mm)	2016



7. **HOLD OPEN ADJUSTMENT:** Change the hold open position by removing screws (1) and then (3). Locate to required position as shown. (See illustration for hold-open spring clip position.) Install screw (3) securely. Tip cam (2) into track and locate as shown. Install long green screw (1) securely. Push door into hold open position. For **INCREASED HOLDING POWER**, loosen long green screw (1), slide cam (2) **TOWARD LATCH**, retighten long green screw (1) securely. For **DECREASED HOLDING POWER**, loosen long green screw (1), slide cam (2) **TOWARD HINGE** edge of door, retighten long green screw (1) securely.

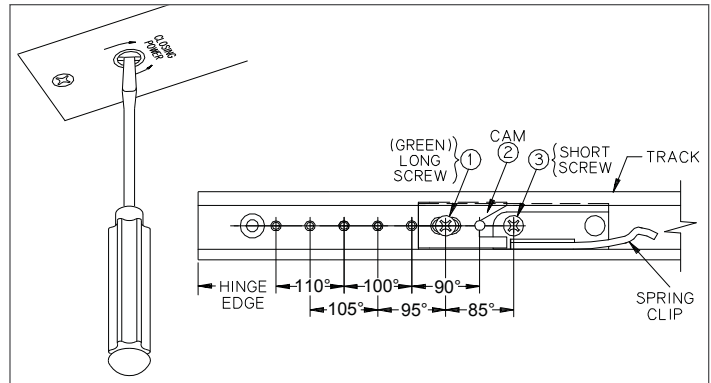

© Allegion 2014  
Printed in U.S.A.  
18755 Rev. 01/14-j

2011 } NON HOLD OPEN (90° - 180°)  
 2014 } H 90 (85° - 110°)  
 2015 } MAX. OPENING 180°  
 2016 }

AUXILIARY STOP RECOMMENDED

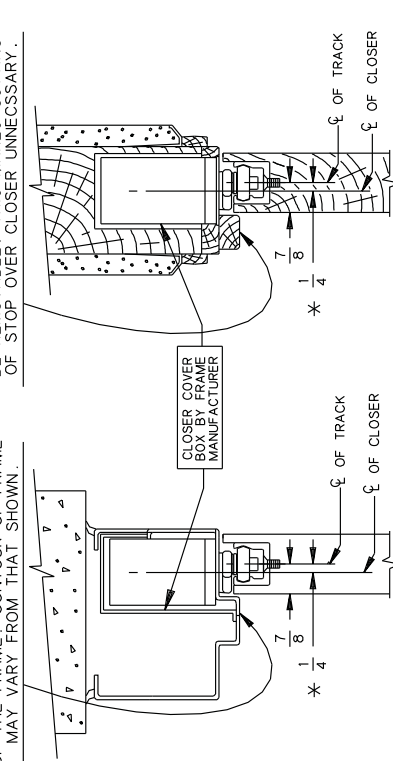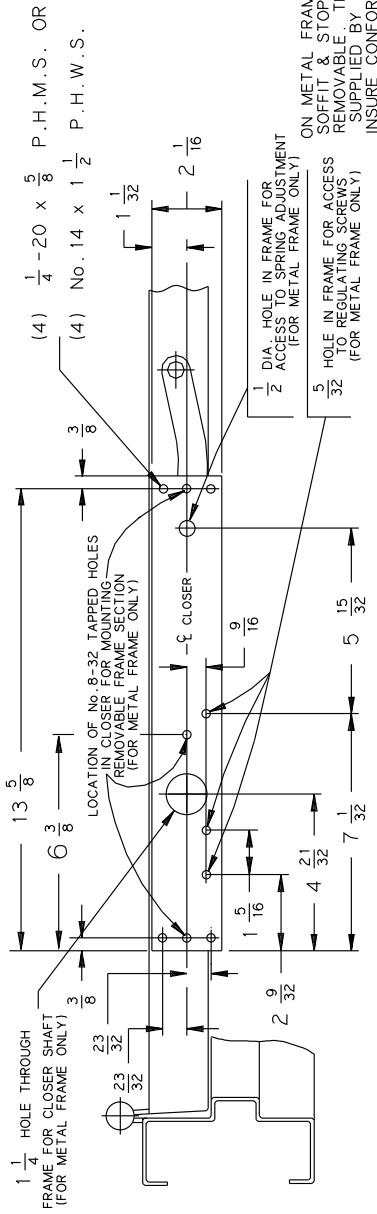


ON METAL FRAMING, THE SECTION OF SOFFIT & STOP AT CLOSER MUST BE REMOVABLE. THIS SECTION MUST BE SUPPLIED BY THE FRAME MFR. TO INSURE CONFORMITY WITH REMAINDER OF THE FRAME. CONTOUR OF FRAME MAY VARY FROM THAT SHOWN.

ON WOOD FRAMING A METAL FINISH PLATE IS SUPPLIED BY LCN CLOSERS TO COVER ENTIRE CLOSER. IF APPLIED STOP IS USED THE ENTIRE HEAD STOP SHOULD BE SCREWED IN PLACE SO IT WILL BE REMOVABLE. THIS MAKES CUTTING OF STOP OVER CLOSER UNNECESSARY.

\*: 1/4 DIMENSION MAY BE INCREASED TO 7/8 TO ACCOMMODATE VARYING WALL THICKNESSES. SUBMIT DETAILS TO LCN FOR SPECIAL INSTRUCTIONS.

NOTES:

- FOR 180° OPENINGS, MAX. ALLOWABLE BUTT SIZE IS 5" x 5".
- MIN. STOP THICKNESS 1/2"
- 1" DOOR TO SOFFIT CLEARANCE REQUIRED.
- REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.
- WITH 2" HEADER ON HOLLOW METAL FRAMES, THE HEADFRAME MUST BE MORTISED.

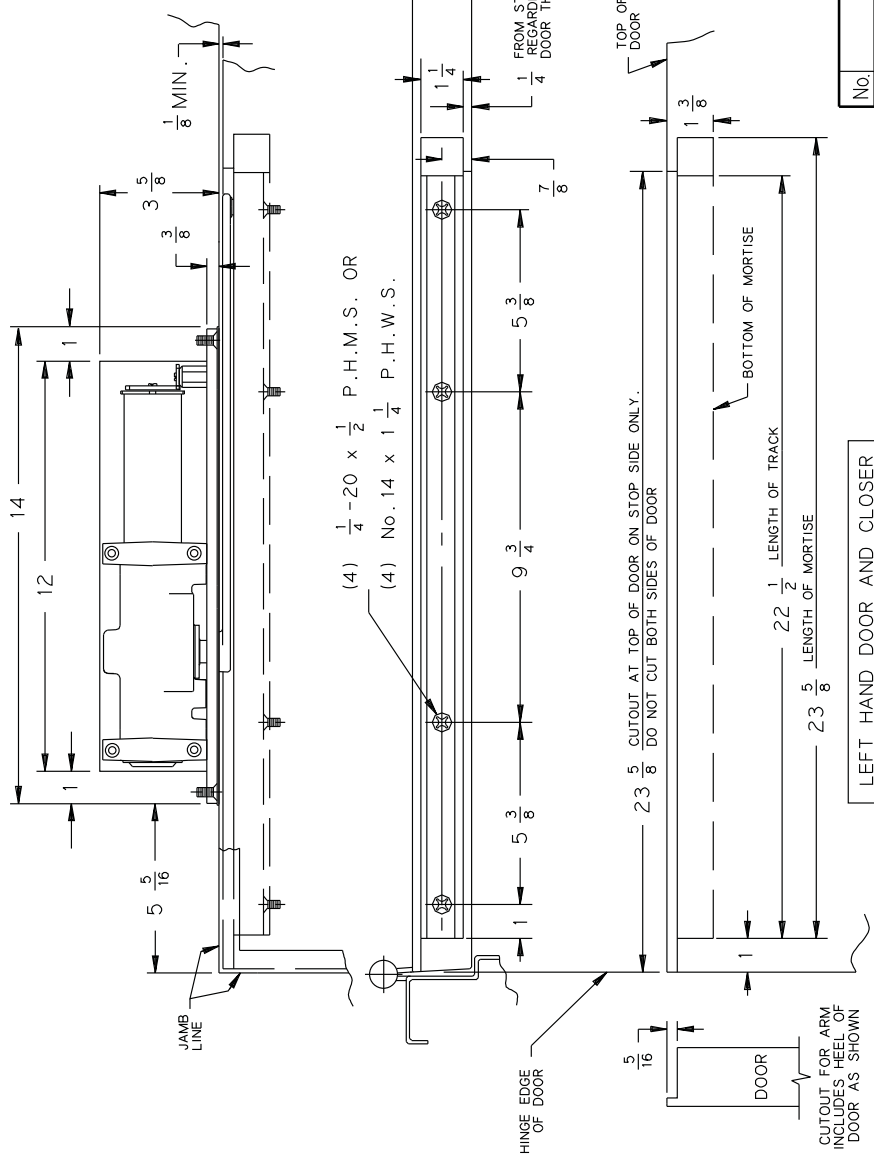

LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE

inch	mm	1 3/8	1 1/4	1 1/8	1 1/16	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8	1 1/8
1 3/8	34	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4
mm	34	32	32	32	32	32	32	32	32	32	32	32	32	32	32
inch	mm	2 1/16	2 3/32	2 1/8	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16	2 1/16
mm	51	52	58	66	92	118	135	137	179	184	248	305	337	356	600

No.	REVISION	BY	DATE
8	TRACK MOUNTING HOLES RELOCATED	DRM	6/90
9	4 IN. HEADER WAS 2 IN.	CTB	11/90
10	REVISED SIZE CHARTS	CTB	6/92
11	SIZE 1 UPDATE / CAD CONVERSION	CTB	1/94
12	REMOVED MOUNTING BRACKETS	AMM	11/97

LCN®  
 DRW CTB 1/94  
 DO NOT SCALE



OVERHEAD CONCEALED CLOSER WITH CONCEALED ARM & TRACK

2010

2011 CP } NON HOLD OPEN (UP TO 120°)  
 2013 CP } H 90 - (75° TO 95°)  
 2014 CP } MAX. OPENING 120°  
 2015 CP }  
 2016 CP }


AUXILIARY STOP RECOMMENDED  
 LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE 6/96

(4) 1/4 - 20 x 5/8 P.H.M.S. OR  
 (4) No. 14 x 1 1/2 P.H.W.S.

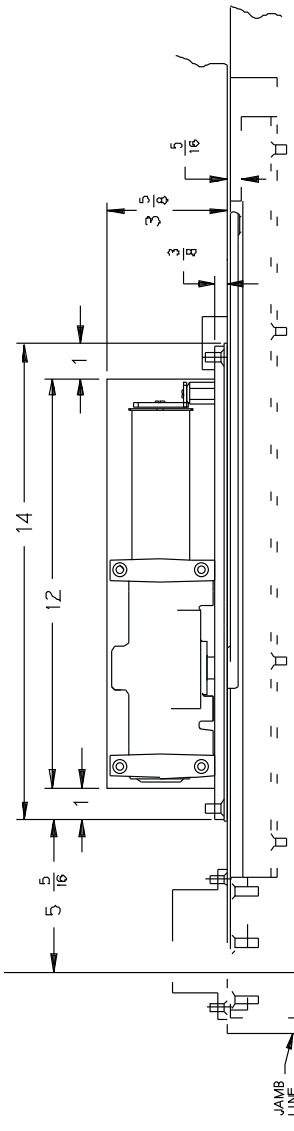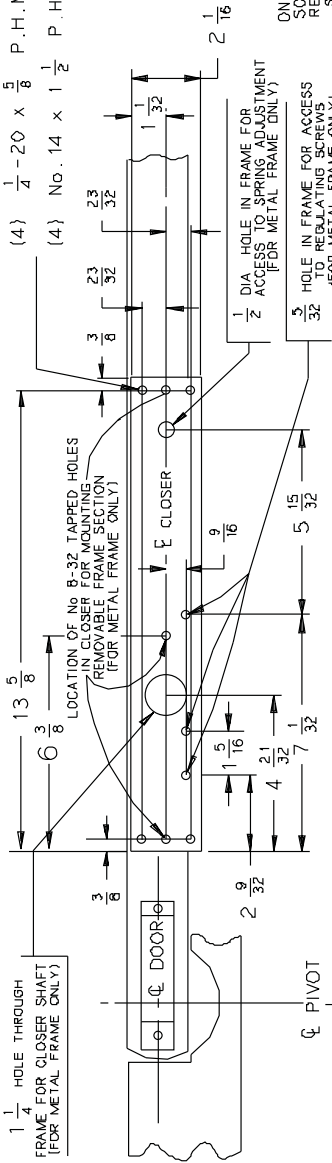


PLAN & ELEVATION OF FRAME SHOWING PREPARATION FOR 2010 CLOSER


(4) 1/4 - 20 x 1/2 P.H.M.S. OR  
 (4) No. 14 x 1 1/4 P.H.W.S.

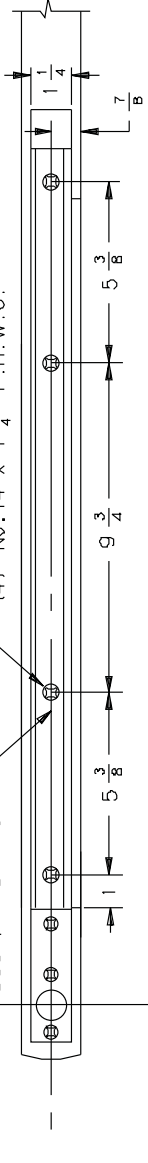

PLAN & ELEVATION OF TOP OF DOOR SHOWING PREPARATION FOR CLOSER TRACK

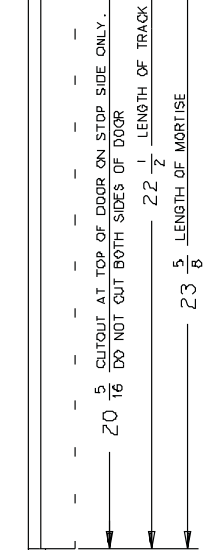

ON METAL FRAMING, THE SECTION OF SOFFIT STOP CLOSER MUST BE REMOVABLE. THIS SECTION MUST BE SUPPLIED BY THE FRAME MFR. TO INSURE CONFORMITY WITH REMAINDER OF THE FRAME CONTOUR OF FRAME MAY VARY FROM THAT SHOWN.

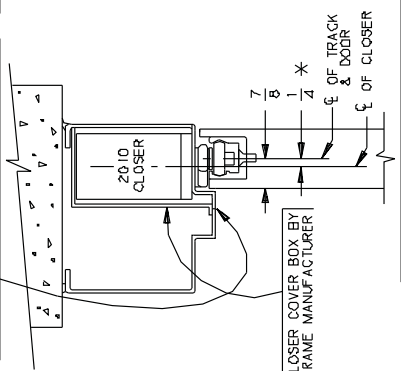

\* 1/4 DIMENSION MAY BE INCREASED TO ACCOMMODATE VARYING WALL THICKNESSES. SUBMIT DETAILS TO LCN FOR SPECIAL INSTRUCTIONS.

- NOTES -  
 1 - MINIMUM STOP THICKNESS 1/2"  
 2 - 1/8" DOOR TO SOFFIT CLEARANCE REQUIRED.  
 3 - REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOOR AND FRAMES.  
 4 - THIS PRODUCT REQUIRES A 4" MINIMUM FRAME HEADER CONSULT FACTORY IF HEAD JAMB IS LESS THAN 4"

**LCN®**  
 APP BY JEJ 6/96  
 DO NOT SCALE

OVERHEAD CONCEALED CLOSER, ARM & TRACK WITH CENTER PIVOTS

2010-CP


No.	REVISION	BY	DATE
1	CAD CONVERSION	CTB	6/93
2	TEMPLATE UPDATE	JEJ	6/96
3	TEMPLATE UPDATE	AMM	2/98
4	REMOVED PIVOT INFO.	AMM	5/01

inch	3/4	1	1 1/8	1 1/4	1 1/2	1 5/8	1 3/4	1 7/8	2	2 1/8	2 1/4	2 3/8	2 1/2	2 5/8	3	3 1/8	3 1/4	3 1/2	3 3/4	4	4 1/8	4 1/4	4 1/2	4 3/4	5	5 1/8	5 1/4	5 1/2	5 3/4	6
mm	19	25	26	32	38	41	44	52	58	60	66	72	76	80	86	92	95	100	108	110	118	120	125	130	135	140	145	150	155	160


2011 OP } NON HOLD OPEN (up to 110°)  
 2013 OP }  
 2014 OP } H-90 (75° to 90°)  
 2015 OP } MAX. OPENING 110°  
 2016 OP }

AUXILIARY STOP RECOMMENDED  
 LEFT HAND DOOR AND CLOSER SHOWN, RIGHT HAND OPPOSITE 6/96


(4)  $\frac{1}{4}$  - 20 x  $\frac{5}{8}$  P.H.M.S. OR  
 (4) No. 14 x  $1\frac{1}{2}$  P.H.W.S.

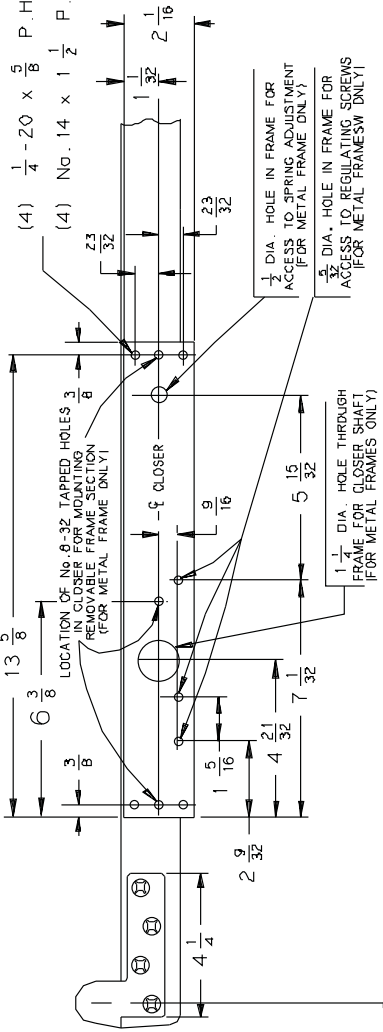

PLAN & ELEVATION OF FRAME SHOWING PREPARATION FOR 2010 CLOSER

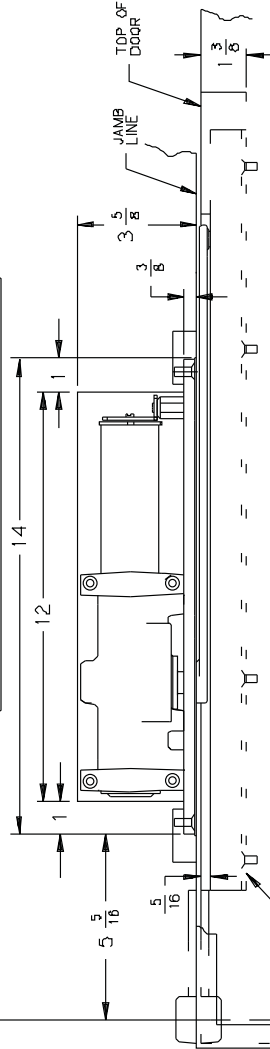

(4)  $\frac{1}{4}$  - 20 x  $\frac{1}{2}$  P.H.M.S. OR  
 (4) No. 14 x  $1\frac{1}{4}$  P.H.W.S.

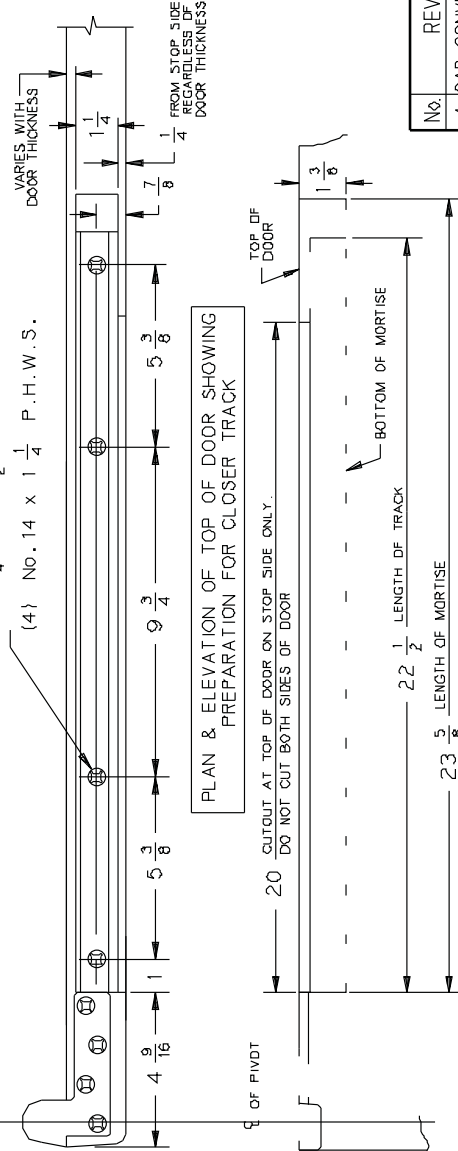


PLAN & ELEVATION OF TOP OF DOOR SHOWING PREPARATION FOR CLOSER TRACK

20 GUTOUT AT TOP OF DOOR ON STOP SIDE ONLY.  
 DO NOT CUT BOTH SIDES OF DOOR

22  $\frac{1}{2}$  LENGTH OF TRACK  
 23  $\frac{5}{8}$  LENGTH OF MORTISE

ON METAL FRAMING, THE SECTION OF SOFFIT & STOP AT CLOSER MUST BE REMOVABLE. THIS SECTION MUST BE REMOVABLE TO COVER ENTIRE CLOSER. IF APPLIED TO COVER ENTIRE CLOSER, IT SHOULD BE SECURED IN PLACE SO IT WILL BE REMOVABLE. THIS MAKES CUTTING OF STOP OVER CLOSER UNNECESSARY.

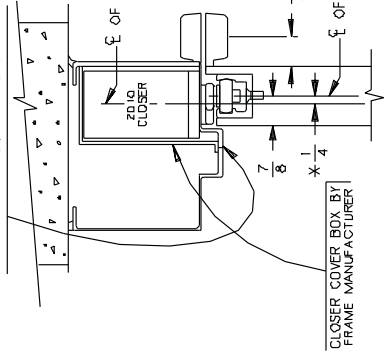

ON TUBE FRAMING A METAL FINISH PLATE IS SUPPLIED BY LCN. CLOSERS TO COVER ENTIRE CLOSER. IF APPLIED TO COVER ENTIRE CLOSER, IT SHOULD BE SECURED IN PLACE SO IT WILL BE REMOVABLE. THIS MAKES CUTTING OF STOP OVER CLOSER UNNECESSARY.


\*  $\frac{1}{4}$  DIMENSION MAY BE INCREASED TO ACCOMMODATE VARYING WALL THICKNESSES. SUBMIT DETAILS TO LCN FOR SPECIAL INSTRUCTIONS.

- NOTES -
- 1 -  $\frac{1}{8}$  DOOR TO STOP CLEARANCE REQUIRED.
  - 2 - REINFORCING PER ANSI/SPI-100 RECOMMENDED FOR HOLLOW METAL DOOR AND FRAMES.
  - 3 - MINIMUM STOP THICKNESS  $\frac{1}{2}$ "
  - 4 - THIS PRODUCT REQUIRES A 4" MINIMUM FRAME HEADER. CONSULT FACTORY IF HEAD JAMB IS LESS THAN 4."



APP BY	JEU 6/96
DO NOT SCALE	
<b>LCN</b>	
REVISION	BY DATE
1 CAD CONVERSION	CTB 6/93
2 TEMPLATE UPDATES	JEU 6/96
3 TEMPLATE UPDATES	AMM 2/98
4 TEMPLATE UPDATES	AMM 9/99
5 REMOVE PIVOT INFO.	AMM 5/01

inch	1/8	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	2	2 1/8	2 3/8
mm	3	6	10	14	16	18	19	22	25	26	27	32	33	35	52	58
inch	2 3/8	3 1/8	4 1/8	5 1/8	6 1/8	7 1/8	8 1/8	9 1/8	10 1/8	11 1/8	12 1/8	13 1/8	14 1/8	15 1/8	16 1/8	17 1/8
mm	66	92	108	116	135	137	139	179	184	248	305	337	356	508	572	600

2010-OP

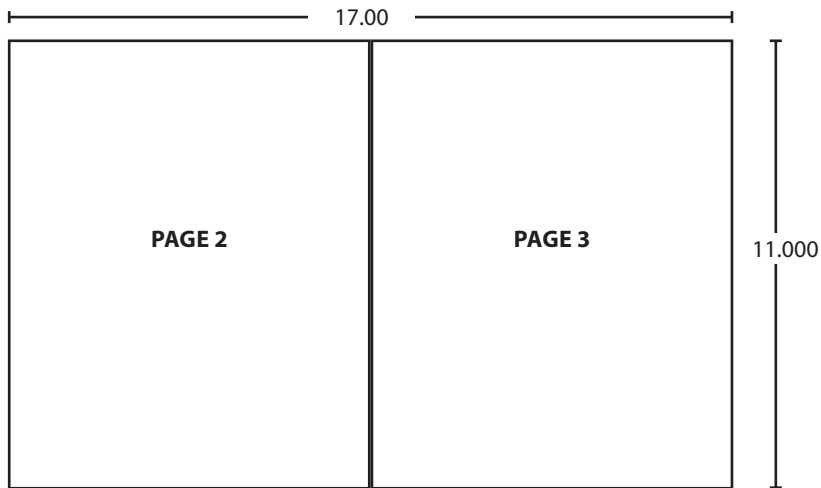

BEGINNING SHEET

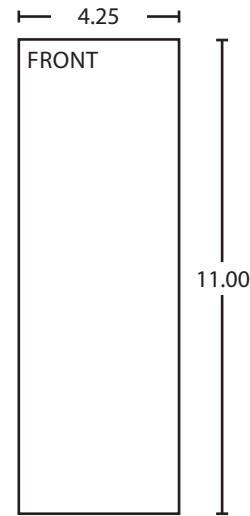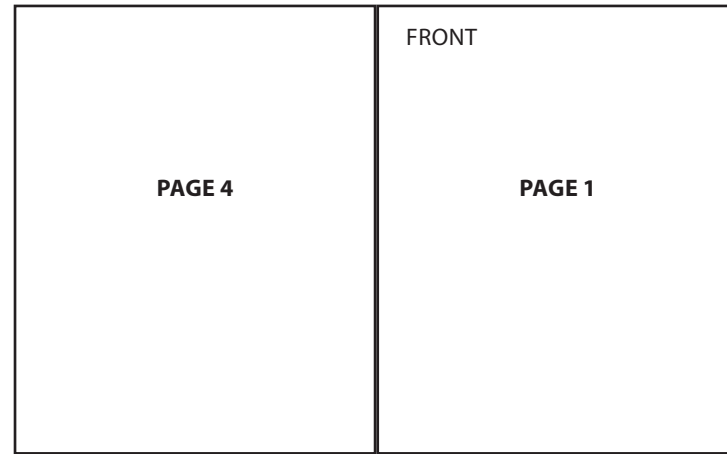

FOLDED SHEET

Additional Notes:
1. None

Revision History						Revision Description:					
J	K	L	M	N	P	J > Revised artwork					
043228											
Material						Edited By		Approved By		EC Number	Release Date
White Paper						D. Myers		M. Sasso		043228	01-01-14
Notes						Title					
1. printed two sides						2010 Series Instruction Sheet					
2. printed black						Creation Date		Number		Revision	
3. tolerance ± .13						05-10-10		18755		J	
4. printed in country may vary						Created By		Activity		© Allegion 2014	
5. drawings not to scale						N/A		3899 Hancock Expwy Security, CO 80911			
						Software: InDesign CS6					