




# 04-032 Retrofit Lever



**P509-464**

04-032 Retrofit Lever for D-Series locksets\* with Orbit, Plymouth or Tulip design knobs.


Installation Instructions

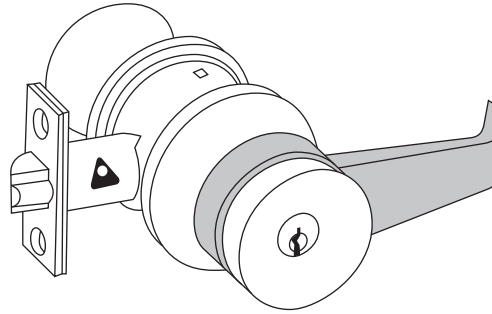

\* Not for use with interchangeable core knob designs.


## 1 Remove Knob

- 1a To remove existing knob from lock unit, insert pointed end of spanner wrench, or small nail, into hole in outside knob sleeve. Exert pressure and turn key slowly until knob catch depresses.
- 1b Pull off knob.
- 1c Remove knob sleeve. (Sleeve is not used with retrofit lever.)

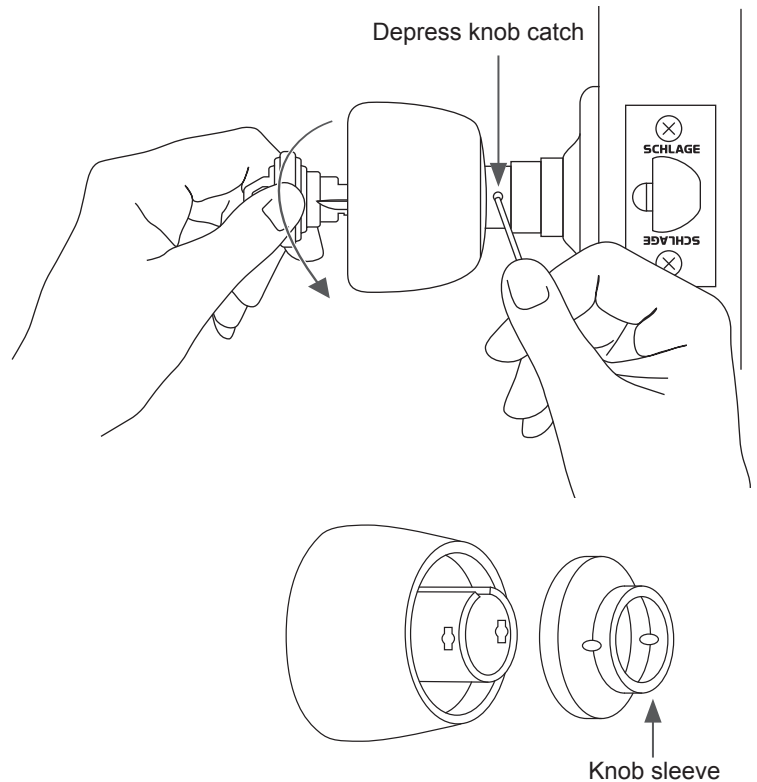


## 2 Lever/Knob Installation

- 2a Place lever in position onto back of knob (TULIP design requires spacer (provided) inserted into cup of lever.) Position lever on knob so that end of lever will point toward hinge side of door when knob is reinstalled.
- 2b

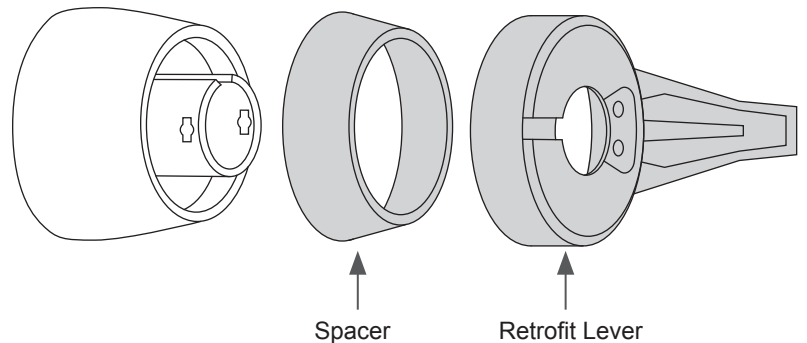


### 3 Assemble Lever/Knob

- 3a Insert lever retaining plate cog into knob-catch slot on the knob shank.
- 3b Snap retainer plate into place.
- 3c Complete installation of retainer plate with provided screws. Screw down completely so that screws are flush with retainer plate.

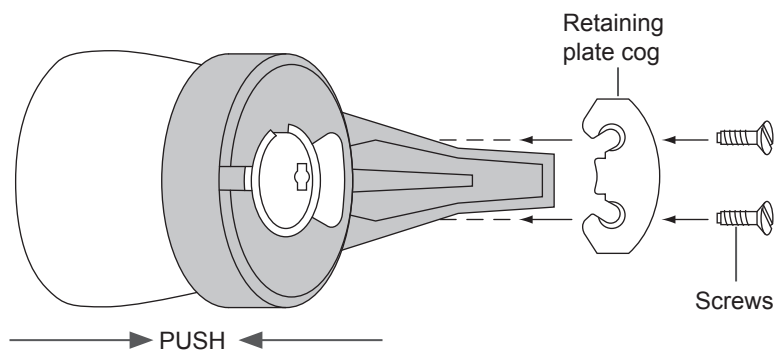

### 4 Replace Knob/Lever

- 4a Slide the assembled retrofit lever and knob on spindle.  
**Line up lug in knob shank with slot in spindle.**
- 4b Depress knob catch, exert pressure, turn key slowly and push lever assembly into position.
- 4c Pull knob to test fastening of catch.
- 4d Test lock for operation

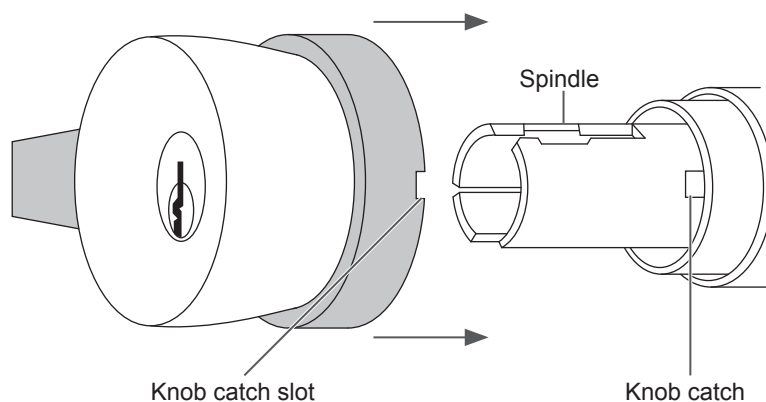

① For additional information see Service Manual 50-100.

#### Customer Service

1-877-671-7011

[www.allegion.com/us](http://www.allegion.com/us)



© Allegion 2014  
Printed in U.S.A.  
P509-464 Rev. 01/14-c