




P509-640

ANSI A115.1 1190 Hollow Steel Door Installation

For 1 $\frac{3}{4}$ " thick hollow steel doors prepared per ANSI A115.1 1990, install two spacers (L583-467) between the spring cage (or knob mounting plate) and lock chassis as shown.

Spacers are required for both the inside and outside escutcheons.

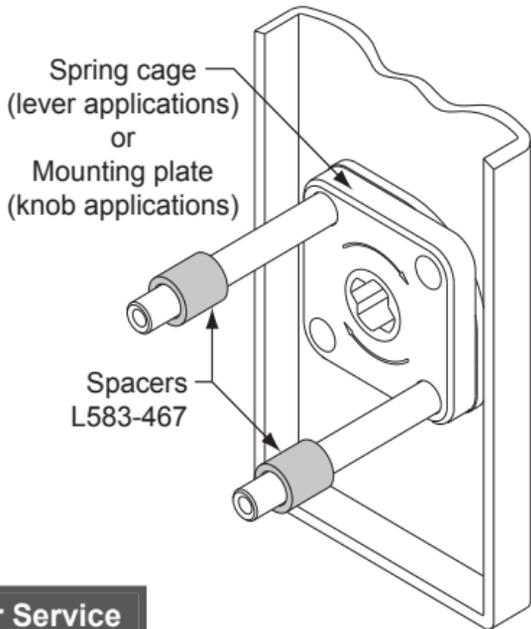

Customer Service

1-877-671-7011

www.allegion.com/us

© Allegion 2014
Printed in U.S.A.
P509-640 Rev. 01/14-e