





P509-384

# How To Remove Insert From Construction Keyed Cylinder




## 1 Insert Extractor Tool

Insert extractor tool into upper part of keyway until it makes firm contact with insert.

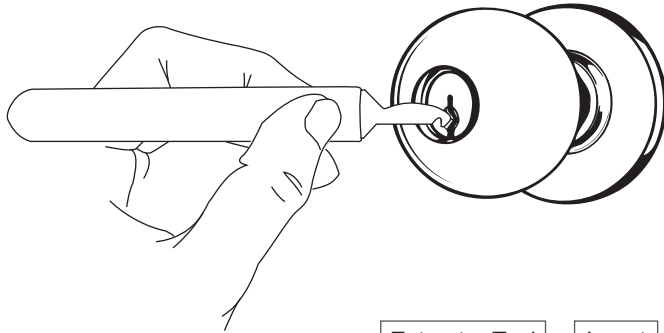

## 2 Remove Insert

Rock tool handle firmly upward to fully engage insert and pull to withdraw extractor and insert from cylinder.

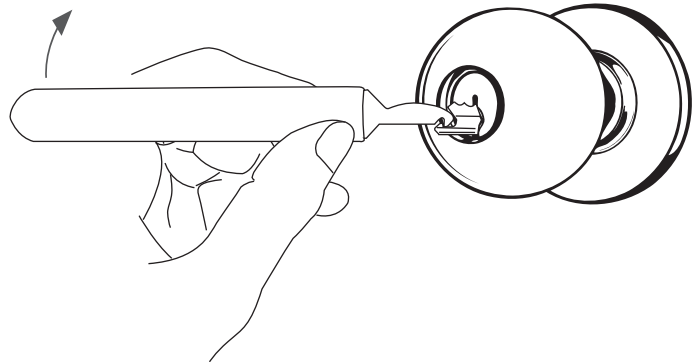

**Customer Service**

1-877-671-7011 [www.allegion.com/us](http://www.allegion.com/us)



© Allegion 2014  
Printed in U.S.A.  
P509-384 Rev. 01/14-d