


(F)19-R Rim Device with FSA or FSE Feature

Knob, Lever and Thumbpiece Trim, Wood Door, LHR Shown, RHR Opposite

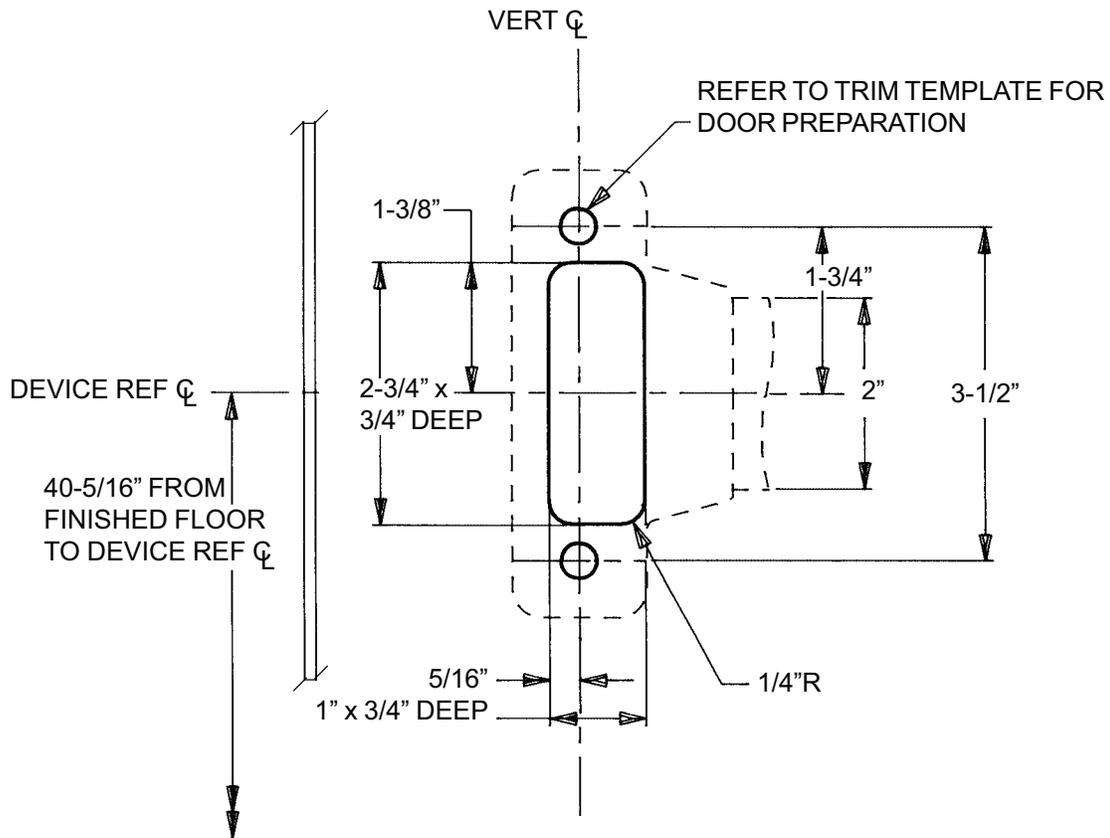

SINGLE DOOR APPLICATION

1/8" ζ VERT

"A"

Strike	Installed	Min. Stile	A
565	Surface	2 7/8"	1 7/16"
565	Flush	2"	1 5/16"
F-570	Surface	3 1/2"	1 5/8"
F-490	Surface	3 1/2"	1 5/8"

DOUBLE DOOR APPLICATION

VERT ζ 1/4" ζ VERT

"B" "B"

Mullion Application Shown

Strike	Installed With	Min. Stile	B
565	2923 Mullion	4"	2 3/4"
565	4023 Mullion	4 1/4"	3"
F-570	F-4023 Mullion	3 3/4"	2 5/8"
F-490	F-4023 Mullion	3 3/4"	2 5/8"
571	19 Vertical	3 1/4"	2 5/16"
571-A	19 Vertical	2 3/4"	1 13/16"

Note: 571 and 571-A strikes are not approved for fire rated applications.

- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.

TEMPLATE

W-5100-a