


(F)19-V Surface Vertical Rod Device with FSA or FSE Feature

Metal Door, LHR Shown, RHR Opposite

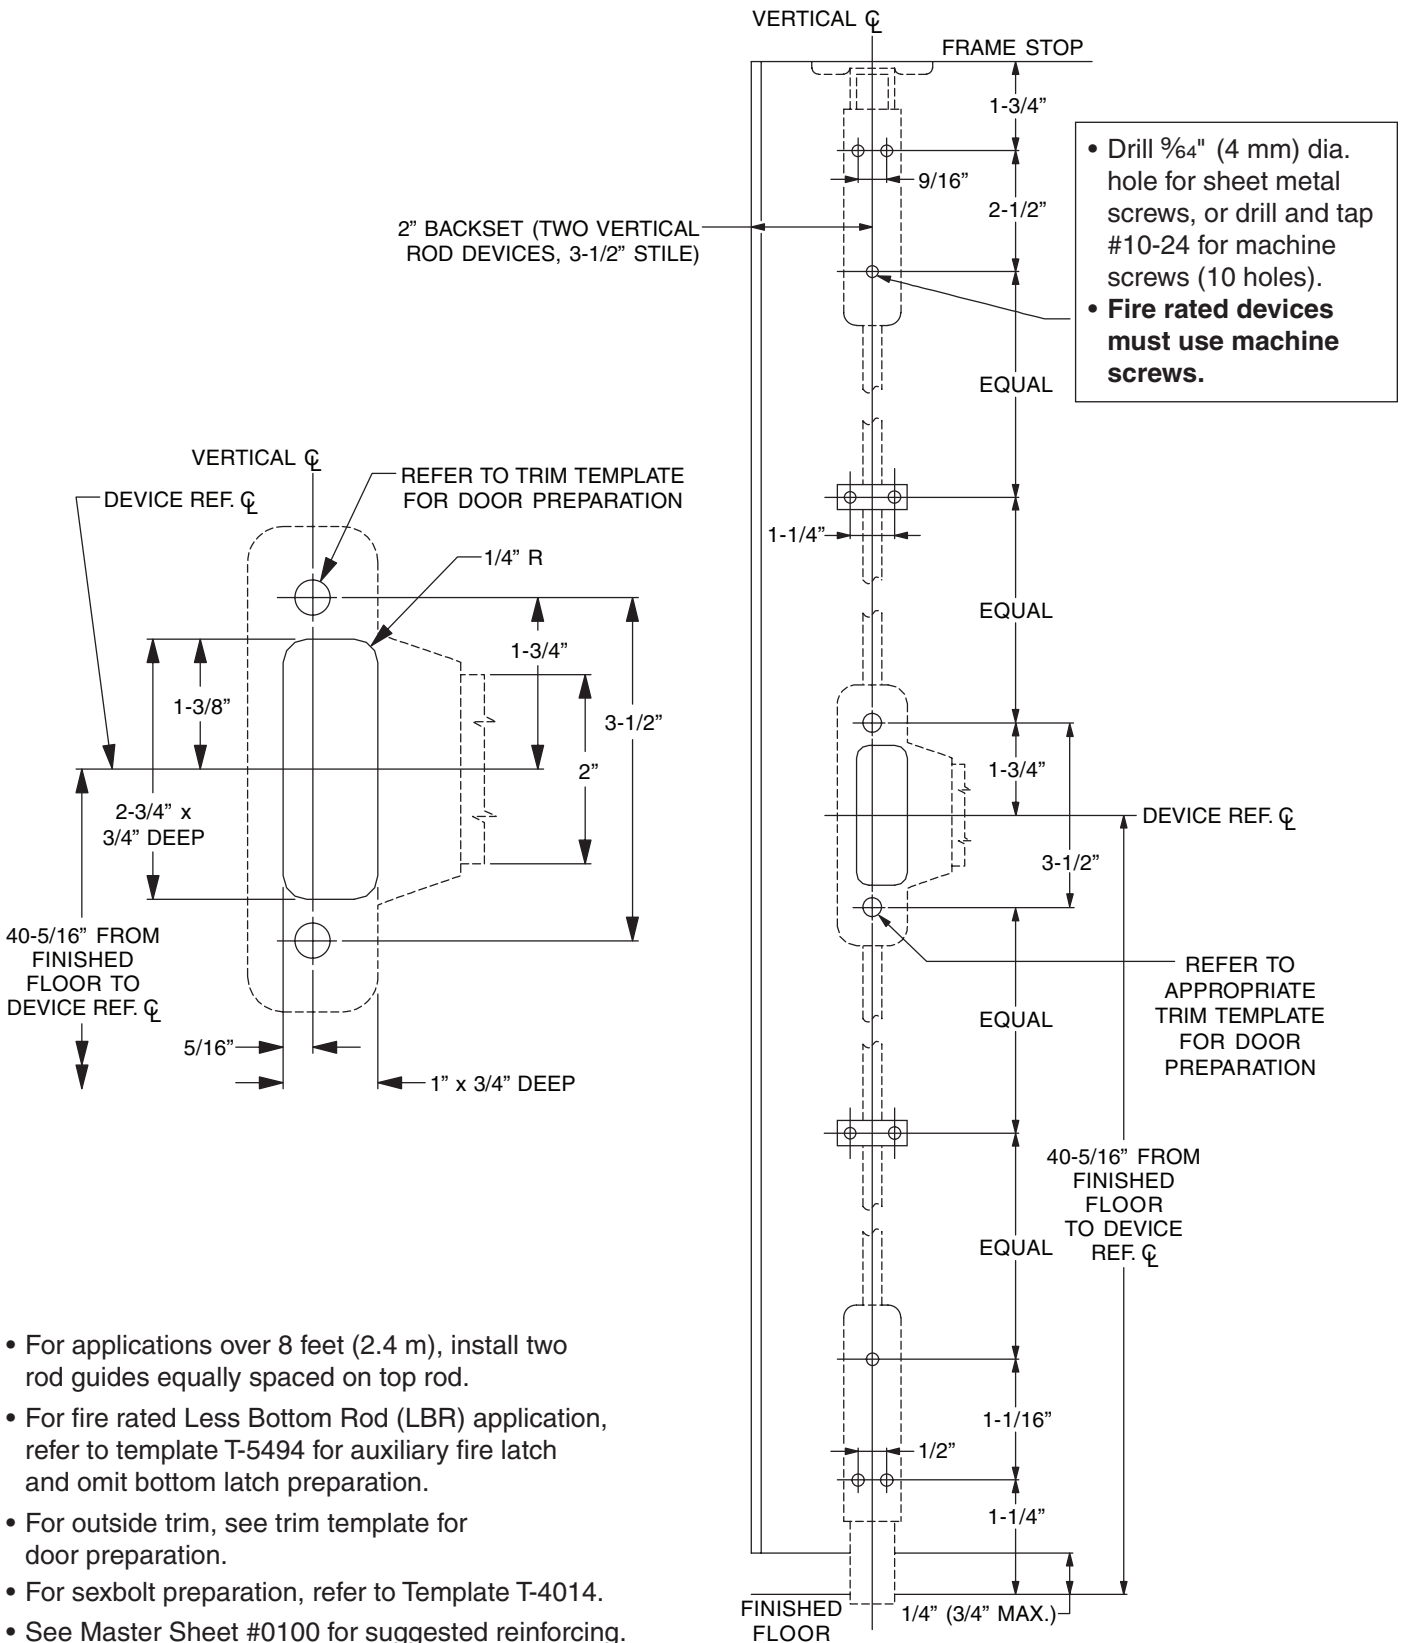

- For applications over 8 feet (2.4 m), install two rod guides equally spaced on top rod.
- For fire rated Less Bottom Rod (LBR) application, refer to template T-5494 for auxiliary fire latch and omit bottom latch preparation.
- For outside trim, see trim template for door preparation.
- For sexbolt preparation, refer to Template T-4014.
- See Master Sheet #0100 for suggested reinforcing.

TEMPLATE
T-5105-a