


# (F)24-R Rim Device

Rim Panic and Fire Exit Device, Metal Door, LHR Shown, RHR Opposite

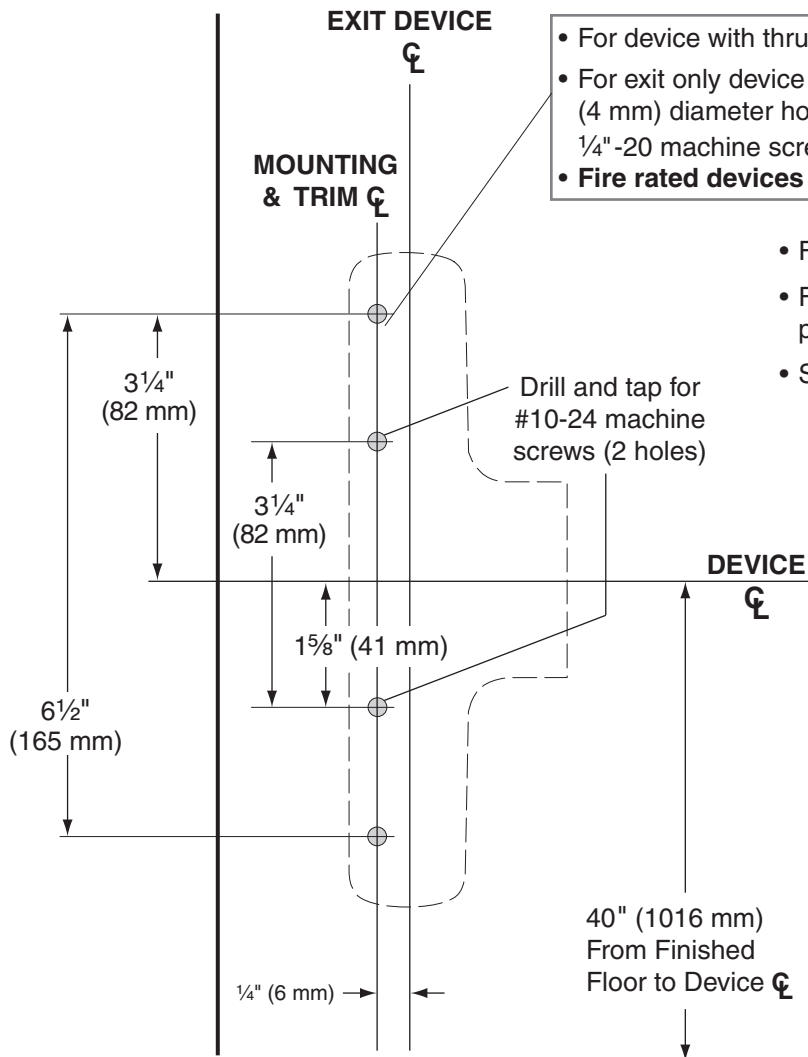

- For device with thrubolting trim, refer to trim template.
- For exit only device or device with non-thrubolting trim, drill  $\frac{3}{16}$ " (4 mm) diameter hole for #14 sheet metal screw. Drill and tap for  $\frac{1}{4}$ "-20 machine screws (2 holes).
- **Fire rated devices must use machine screws.**

- For sexbolt preparation, refer to Template T-4014.
- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.

**SINGLE DOOR APPLICATION**

Strike	Installed	Min. Stile	A
299	Surface	3 1/2"	1 7/16"
299-F	Surface	3 1/2"	1 7/16"
264	Surface	3 5/8"	1 5/16"
1439	Flush	2 1/4"	3/4"
1606	Surface	2 3/4"	1 1/8"

Strike	Installed With	Min. Stile	B
299	2923 Mullion	3 1/2"	2 3/16"
299	4023 Mullion	4"	2 7/16"
299-F	F-4023 Mullion	4"	2 7/16"
264	2923 Mullion	3 5/8"	2 1/16"
264	4023 Mullion	3 5/8"	2 5/16"
1439	2923 Mullion	3 7/16"	1 7/8"
1439	4023 Mullion	3 1 1/16"	2 1/8"
1606	2923 Mullion	3 5/16"	1 7/8"
1606	4023 Mullion	3 1 1/16"	2 1/8"
1609	Surface 24-V	3 1/16"	1 1/2"
4396	4423 Mullion	2 1/8"	1 1/8"

**DOUBLE DOOR APPLICATION**

TEMPLATE  
**T-1320-c**