


(F)24-V Surface Vertical Device

Surface Vertical Rod Panic and Fire Exit Device, Wood Door, LHR Shown, RHR Opposite

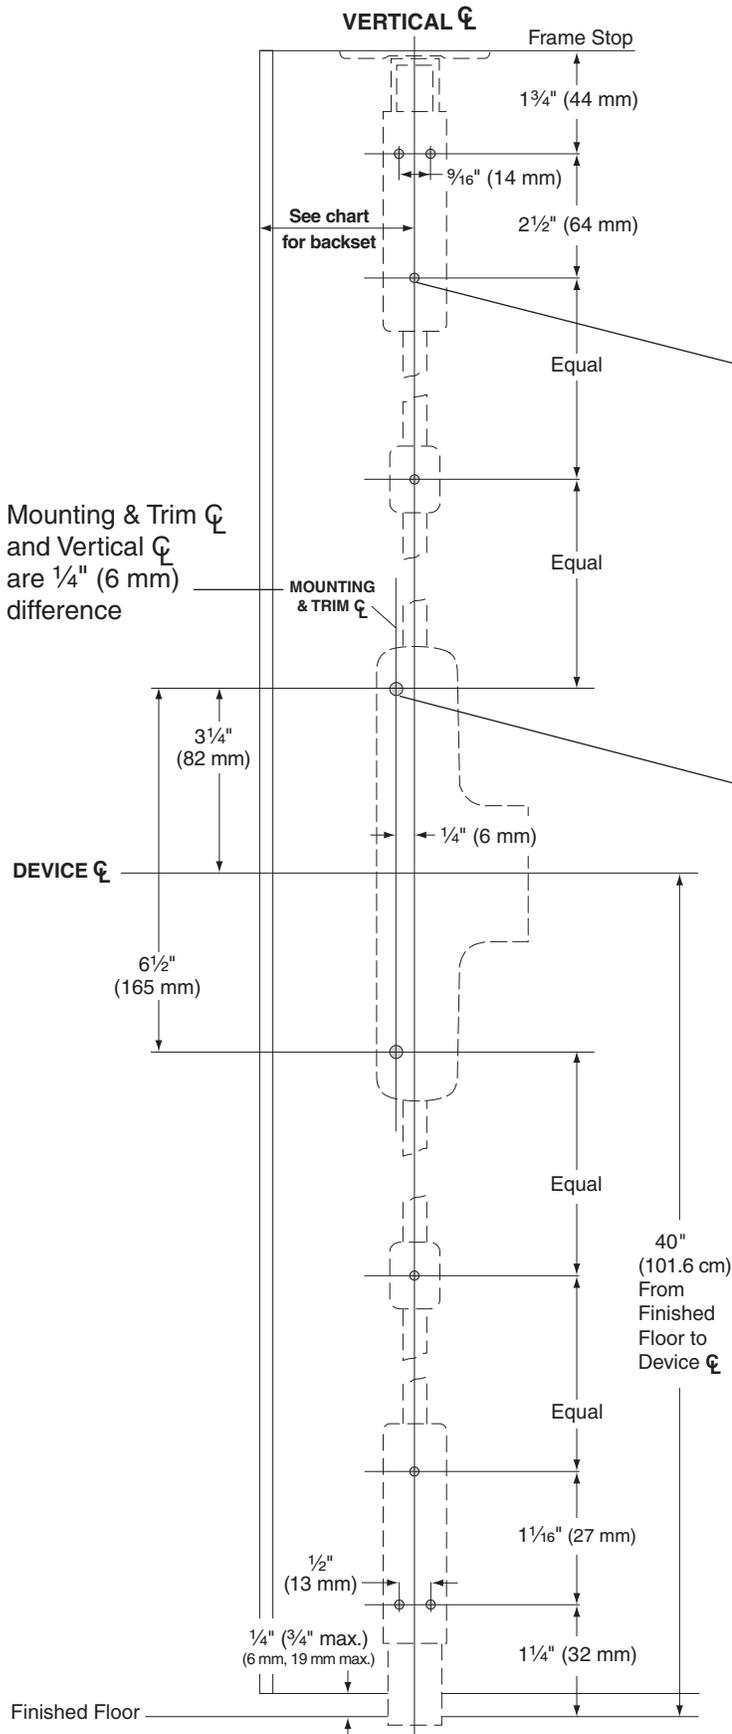

| BACKSET | | |
|---|----------------------------------|------------------|
| Installation | 2 1/8" Min. Stile | 3" to Flush Door |
| Two Vertical Rod Devices | 1 1/4" | 2 1/4" |
| Vertical Rod x Rim Device (1609 Strike) | 2" Backset 3 5/16" Min. Stile | |

- Drill 1/8" (3 mm) diameter x 1" (25 mm) deep, or refer to Template W-4014 for sexbolt preparation (8 holes).
- **Fire rated devices require sexbolts.**

- Drill 1/8" (3 mm) diameter x 1" (25 mm) deep, or refer to Template W-4014 for sexbolt preparation (2 holes).
- For device with thrubolting trim, refer to trim template.
- **Fire rated devices require sexbolts.**

- For applications over 8 feet, install two rod guides equally spaced on top rod.
- For fire rated Less Bottom Rod (LBR) application, refer to template W-5494 for auxiliary fire latch preparation.
- For outside trim, see trim template for door preparation.
- For sexbolt preparation, refer to Template W-4014.

**TEMPLATE
W-1328-b**