


(F)XX-R Rim Device

Rim Panic and Fire Exit Device, Metal Door, LHR Shown, RHR Opposite

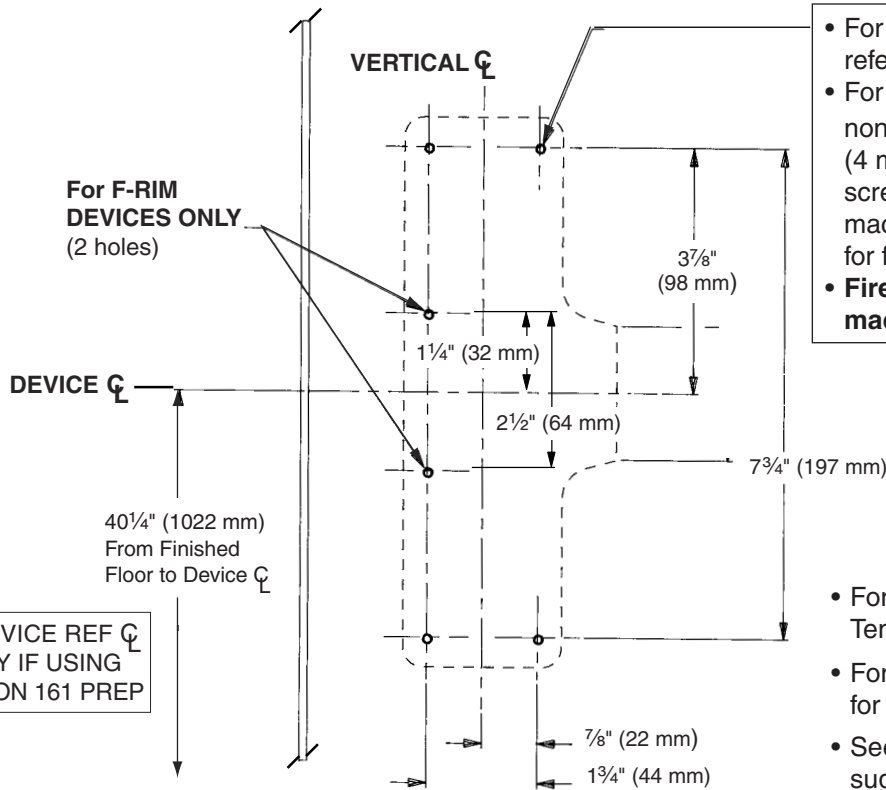

- For device with thrubolting trim, refer to trim template.
- For exit only device or device with non-thrubolting trim, drill $\frac{9}{64}$ " (4 mm) dia. hole for sheet metal screw, or drill and tap for #10-24 machine screw (4 holes; 6 holes for fire rated devices).
- **Fire rated devices must use machine screws.**

NOTE: DEVICE REF CL WILL VARY IF USING KIL TRIM ON 161 PREP

- For sexbolt preparation, refer to Template T-4014.
- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.

SINGLE DOOR APPLICATION

Strike	Installed	Min. Stile	A
565	Surface	3 $\frac{3}{4}$ "	2"
565	Flush	3 $\frac{1}{4}$ "	1 $\frac{1}{2}$ "
570*	Surface	4"	2 $\frac{1}{4}$ "
579	Surface	3 $\frac{1}{2}$ "	1 $\frac{5}{8}$ "
490*	Surface	4"	2 $\frac{1}{4}$ "
F-570*	Surface	4"	2 $\frac{1}{4}$ "
F-490*	Surface	4"	2 $\frac{1}{4}$ "

*Covers ANSI A115.2 stock prep using a $\frac{5}{8}$ " stop height.

DOUBLE DOOR APPLICATION

Strike	Installed With	Min. Stile	B
565	2923 Mullion	3 $\frac{3}{4}$ "	2 $\frac{3}{4}$ "
565	4023 Mullion	4"	3"
570	2923 Mullion	4"	3"
570	4023 Mullion	4 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "
579	2923 Mullion	3 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "
579	4023 Mullion	3 $\frac{5}{8}$ "	2 $\frac{5}{8}$ "
490	2923 Mullion	4"	3"
490	4023 Mullion	4 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "
F-570	F-4023 Mullion	4 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "
F-490	F-4023 Mullion	4 $\frac{1}{4}$ "	3 $\frac{1}{4}$ "
571	18/XX Vertical	3 $\frac{7}{8}$ "	2 $\frac{7}{8}$ "
571-A	18/XX Vertical	3 $\frac{5}{8}$ "	2 $\frac{3}{8}$ "

Note: 571 and 571-A strikes are not approved for fire rated applications.

TEMPLATE
T-1401-a