


(F)XX-R Rim Device

Rim Panic and Fire Exit Device, Wood Door, LHR Shown, RHR Opposite

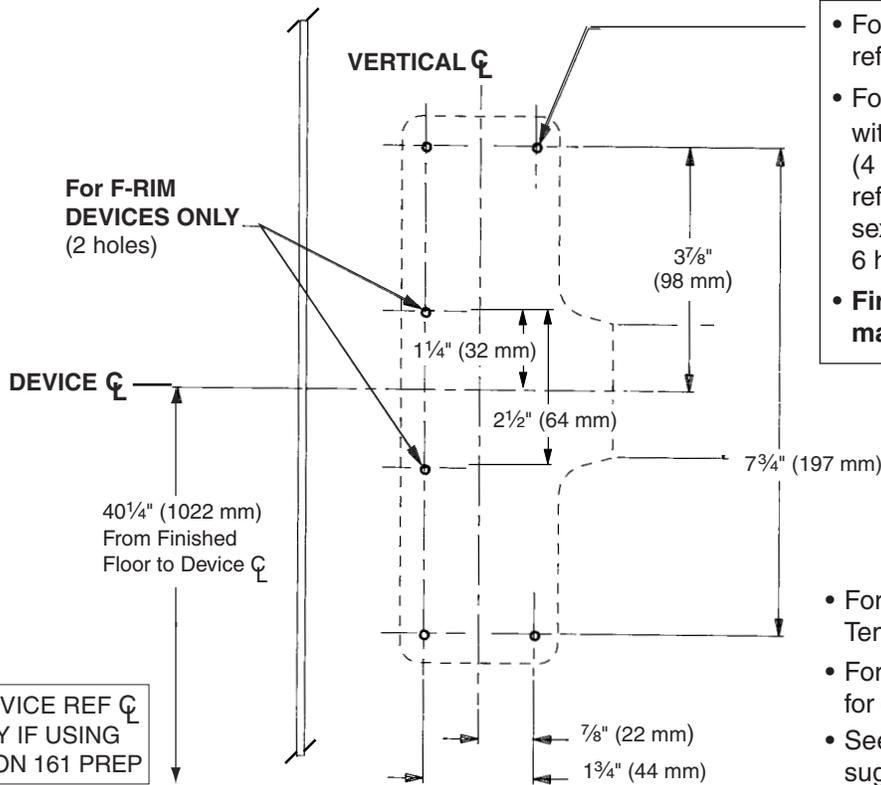

- For device with thrubolting trim, refer to trim template.
- For exit only device or device with non-thrubolting trim, drill 9/64" (4 mm) dia. hole x 1 1/4" deep or refer to Template W-4014 for sexbolt preparation (4 holes; 6 holes for fire rated devices).
- **Fire rated devices must use machine screws.**

NOTE: DEVICE REF \bar{C} WILL VARY IF USING KIL TRIM ON 161 PREP

- For sexbolt preparation, refer to Template W-4014.
- For outside trim, see trim template for door preparation.
- See Master Sheet #0100 for suggested reinforcing.

SINGLE DOOR APPLICATION

Strike	Installed	Min. Stile	A
565	Surface	3 3/4"	2"
565	Flush	3 1/4"	1 1/2"
570*	Surface	4"	2 1/4"
579	Surface	3 1/2"	1 5/8"
490*	Surface	4"	2 1/4"
F-570*	Surface	4"	2 1/4"
F-490*	Surface	4"	2 1/4"

*Covers ANSI A115.2 stock prep using a 5/8" (16 mm) stop height.

DOUBLE DOOR APPLICATION

Strike	Installed With	Min. Stile	B
565	2923 Mullion	3 3/4"	2 3/4"
565	4023 Mullion	4"	3"
570	2923 Mullion	4"	3"
570	4023 Mullion	4 1/4"	3 1/4"
579	2923 Mullion	3 3/8"	2 3/8"
579	4023 Mullion	3 5/8"	2 5/8"
490	2923 Mullion	4"	3"
490	4023 Mullion	4 1/4"	3 1/4"
F-570	F-4023 Mullion	4 1/4"	3 1/4"
F-490	F-4023 Mullion	4 1/4"	3 1/4"
571	18/XX Vertical	3 3/8"	2 7/8"
571-A	18/XX Vertical	3 3/8"	2 3/8"

Note: 571 and 571-A strikes are not approved for fire rated applications.

TEMPLATE
W-1401-a