


(F)XX-R Series Rim Device with FSA or FSE Feature

Knob, Lever and Thumbpiece Trim, Wood Door, LHR Shown, RHR Opposite

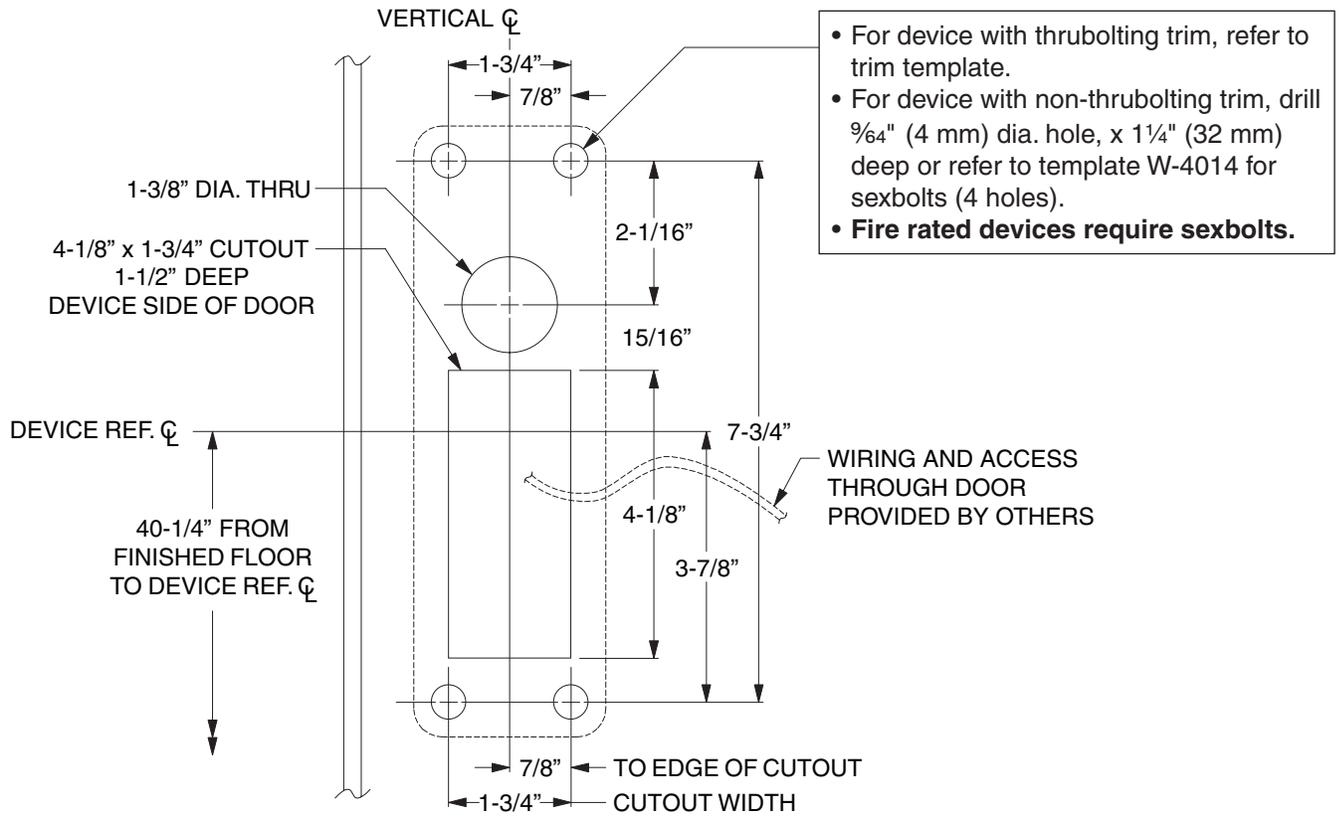

- For device with thrubolting trim, refer to trim template.
- For device with non-thrubolting trim, drill 9/64" (4 mm) dia. hole, x 1 1/4" (32 mm) deep or refer to template W-4014 for sexbolts (4 holes).
- **Fire rated devices require sexbolts.**

SINGLE DOOR APPLICATION

Strike	Installed	Min. Stile	A
565	Surface	3 3/4"	2"
565	Flush	3 1/4"	1 1/2"
570	Surface	4"	2 1/4"
579	Surface	3 1/2"	1 5/8"
490	Surface	4"	2 1/4"
F-570	Surface	4"	2 1/4"
F-490	Surface	4"	2 1/4"

DOUBLE DOOR APPLICATION

Strike	Installed With	Min. Stile	B
565	2923 Mullion	4"	2 3/4"
565	4023 Mullion	4 1/4"	3"
570	2923 Mullion	4 1/4"	3"
570	4023 Mullion	4 1/2"	3 1/4"
579	2923 Mullion	3 5/8"	2 3/8"
579	4023 Mullion	3 7/8"	2 5/8"
490	2923 Mullion	4 1/4"	3"
490	4023 Mullion	4 1/2"	3 1/4"
F-570	F-4023 Mullion	4 1/2"	3 1/4"
F-490	F-4023 Mullion	4 1/2"	3 1/4"
571	18/XX Vertical	4 1/8"	2 7/8"
571-A	18/XX Vertical	3 5/8"	2 3/8"

Note: 571 and 571-A strikes are not approved for fire rated applications.

- For outside trim, see trim template for door preparation.
- For sexbolt preparation, refer to Template W-4014.

TEMPLATE
W-5001-a