


(F)XX-V Device with FSA or FSE Feature

Wood Door, LHR Shown, RHR Opposite

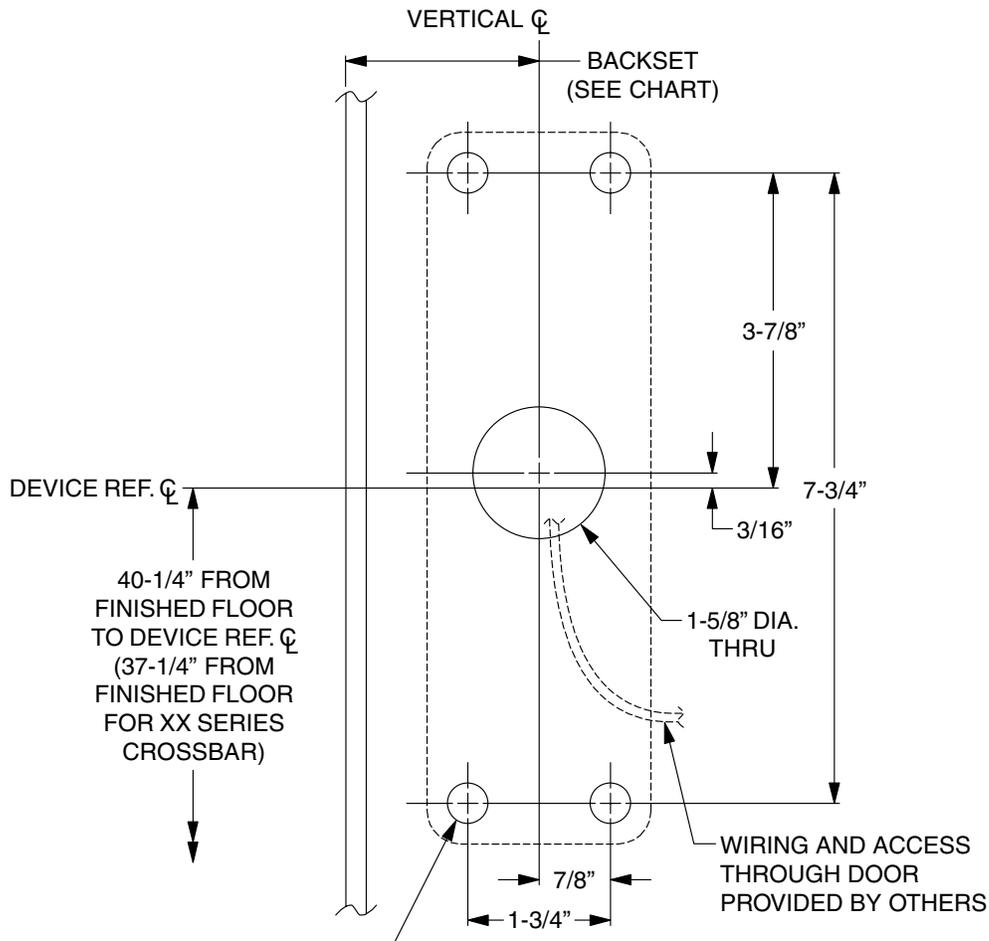

- For exit only device or device with non-thrulbolting trim, drill $\frac{9}{64}$ " (4 mm) diameter hole x $1\frac{1}{4}$ " (32 mm) deep, or refer to Template W-4014 for sexbolt preparation (4 holes).
- For device with thrulbolting trim, refer to trim template.
- **Fire rated devices require sexbolts.**

INSTALLATION	BACKSET	
	3-1/2" MIN. STILE	FLUSH DOOR
TWO VERTICAL ROD DEVICES	1/2 OF STILE	2-3/4"
VERTICAL ROD x MORTISE DEVICE	2-3/4"	2-3/4"
VERTICAL ROD x RIM DEVICE (USING 571 STRIKE)	2-3/4"	2-3/4"
VERTICAL ROD x RIM DEVICE (USING 571-A STRIKE)	2-1/4"	2-1/4"

NOTE: 571 AND 571-A STRIKES ARE NOT APPROVED FOR FIRE RATED APPLICATIONS.

TEMPLATE
W-5016-a