


# TYPE 86 STOCK HOLLOW METAL DOOR

A.N.S.I. CUTOUTS ARE SHOWN FOR REFERENCE ONLY. SEE A.N.S.I. SPECIFICATION NO. A115 FOR THE SIZE AND LOCATION OF THESE CUTOUTS.

LHR SHOWN  
RHR OPPOSITE

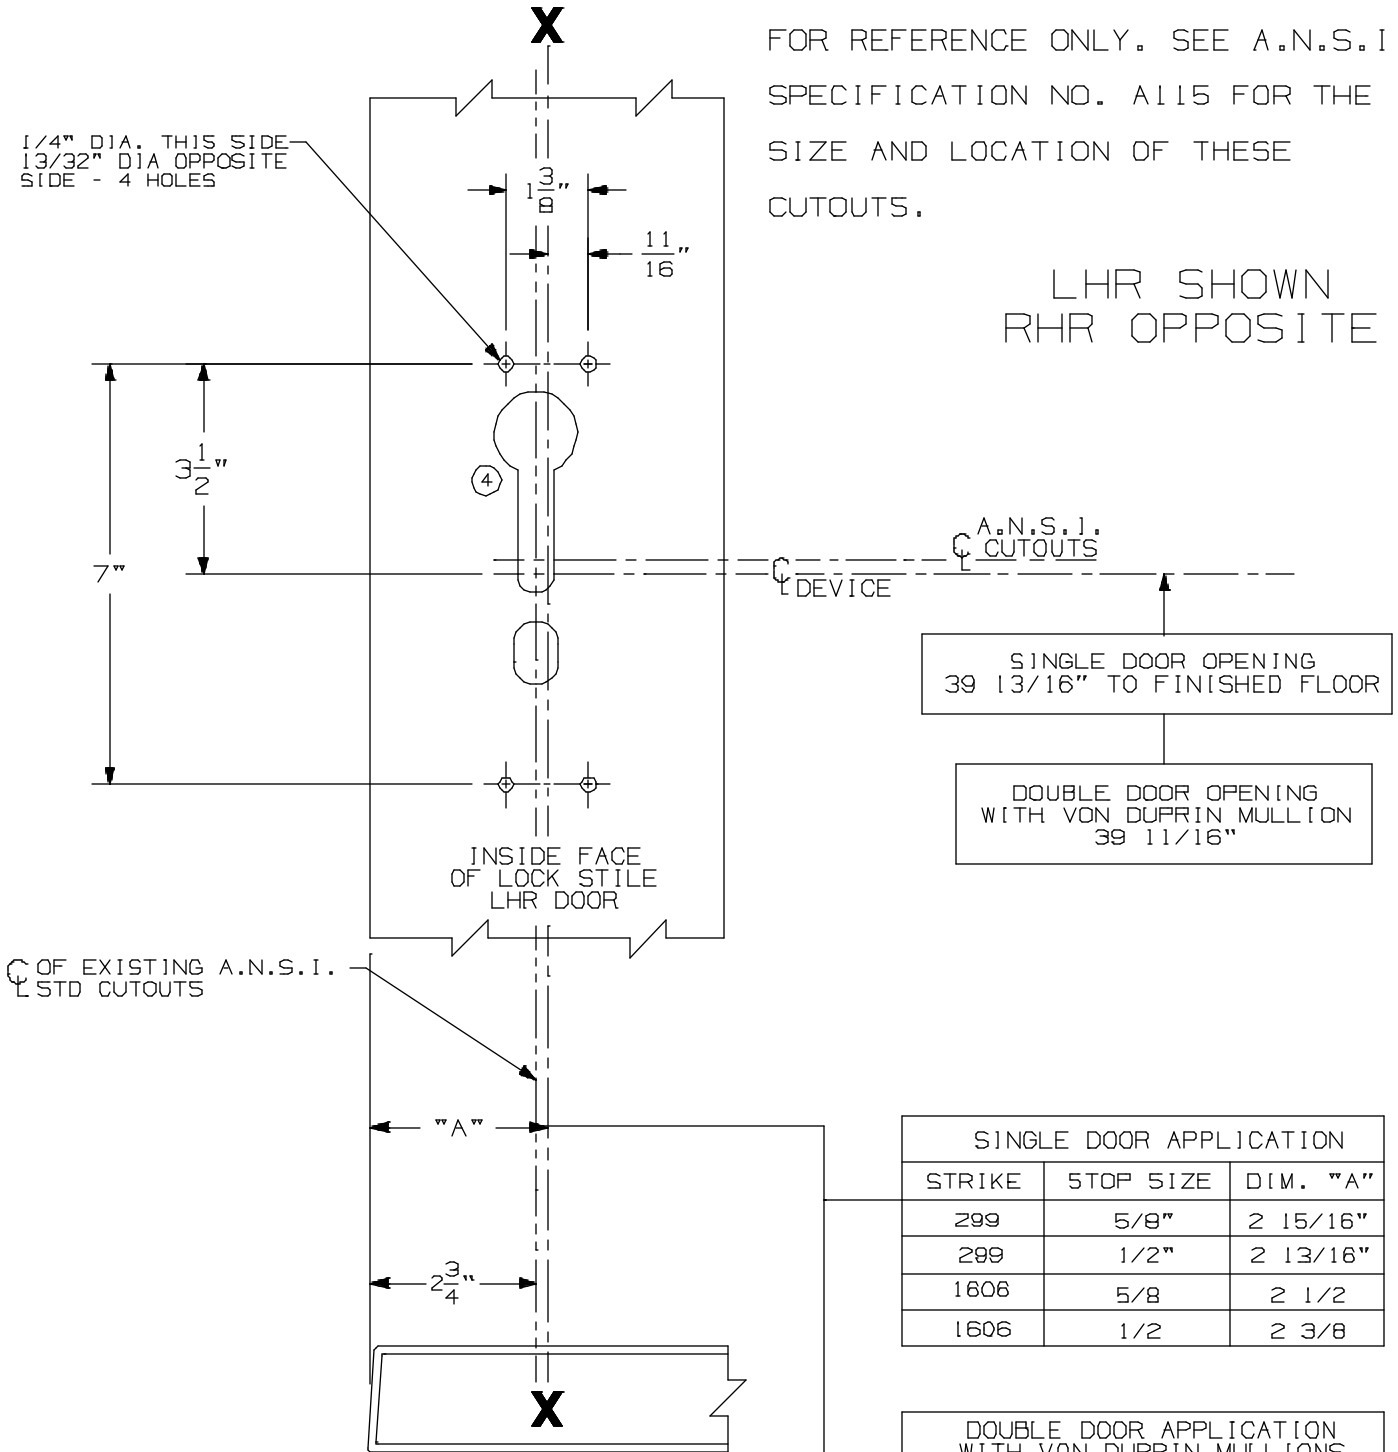

SINGLE DOOR OPENING  
39 13/16" TO FINISHED FLOOR

DOUBLE DOOR OPENING  
WITH VON DUPRIN MULLION  
39 11/16"

SINGLE DOOR APPLICATION		
STRIKE	STOP SIZE	DIM. "A"
299	5/8"	2 15/16"
299	1/2"	2 13/16"
1606	5/8"	2 1/2"
1606	1/2"	2 3/8"

DOUBLE DOOR APPLICATION WITH VON DUPRIN MULLIONS		
MULLION	STRIKE	DIM. "A"
5654	299	2 7/8"
1654	1606	2 7/8"

FOR ADDITIONAL INFORMATION  
SEE TEMPLATE NO. 10300  
FOR OUTSIDE TRIM PREPARATION, WHEN REQUIRED,  
SEE ADDITIONAL TRIM TEMPLATE.

98/99 EO, DT Rim Devices w/ 990, 991/992DT  
Trim for Type "86" Stock Hollow Metal Applications

**VON DUPRIN®**

NOTES: SEE MASTER SHEET #10001 FOR SUGGESTED REINFORCING

TEMPLATE NUMBER:

10313\_a

DATE:  
05-21-13