




Edge guards

Ives edge guards, designed to protect the edge of the door, can be used in both single or double acting door applications. They feature 21 types including beveled, non-beveled, bull nose, overlap and astragal. There are 10 standard cutout options, available in 0.050 material in stainless steel, brass or aluminum and can be used on $1^3/4$ ", 2" or $2^1/4$ " thick doors. Available with stamped UL label for fire rated applications. Edge guard lengths have a range from 12" - 120" in 1/8" increments.

Use the Ives edge guard ordering guide to select the best edge guard model, UL, length, finish, and cutout option to fit your project needs.

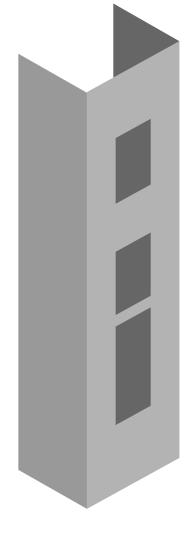

Information and customer care



us.allegion.com



US 877.671.7011 Canada 800.900.4734



support@allegion.com



https://www.youtube.com/ivessecurity

Ordering



Allegion_Orders@allegion.com




eFax: 1.877.424.8494

Edge guard model

Mortise type







7302



7302B



7303




Non-mortise type


7304



7305




7306



7306B



7307




Overlapping type


7308



7309




7310



7310B



7311




Semi-overlap type

7310S


1.750 [44.5] 1.250 [31.8]

7310SB



Edge guard model

Astragal type*

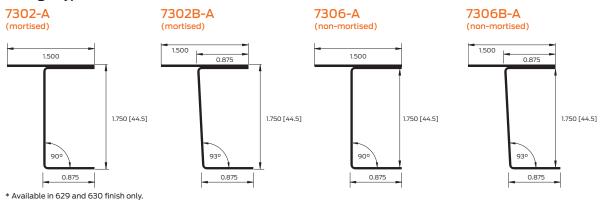


Competitive cross reference

Ives	Rockwood	Hager	ABH
7300	300	180H	A528SM
7301	301	180K	A528BM
7302	302	180M	A538SM
7302B	302B	180P	A538BM
7303		180Q	A538RM
7304	304	182H	A528S
7305	305	182K	A528B
7306	306	182M	A538S
7306B	306B	182P	A538B
7307	307	182Q	A538R
7308	308	181H	A528SO
7309	309	181K	A528BO
7310	310	181M	A538SO
7310B	310B	181P	A538BO
7311		181Q	
7310S	310S		A528SO-1
7310SB	310BS		A528BO-1
7302-A			A548SM
7302B-A			A548BM
7306-A	306-AST		A548S
7306B-A	306B-AST		A548B

Handing, door standards and options

Handing

Consider the hand of door and frame: left hand, right hand, left hand reverse, right hand reverse.



Active or Inactive

If you are installing astragal type edge guards for double door applications, also consider if the door is:


- Active: the most often used door, featuring locking hardware.
- Inactive: door that stays closed and is opened on occasion to create a larger entryway.

Door thickness

Ives edge guards can be used on standard $1\,^3/_4$ " doors and are also available for 2" and $2\,^1/_4$ " doors. Use the guide below to evaluate door thickness.


Edge mount standard


Edge guards are offered with standard mounting hole placement, as shown in the diagram.





Standard cutouts

A total of 10 standard cutout options are available.

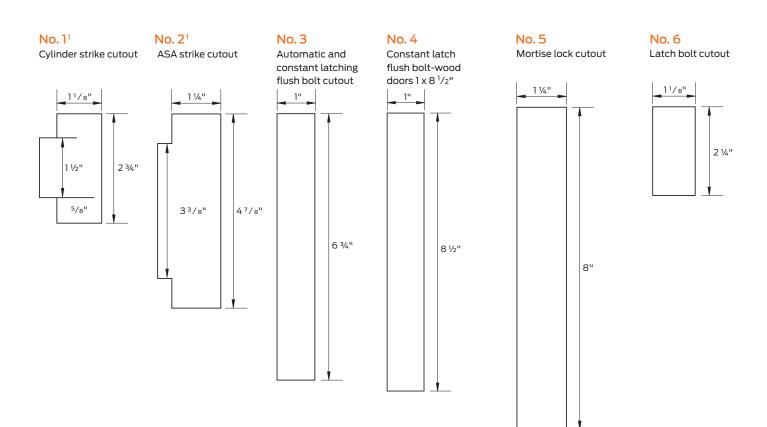





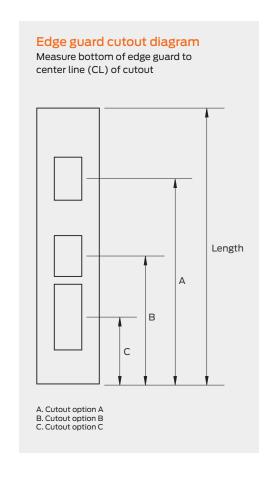

Provided center as standard. If offset pull or offset push is required call customer care.
 Cutouts are measured 6" bottom to center line.

Edge guard order form

Completed form required with each purchase order.

Allegion

11819 N. Pennsylvania St. Carmel, IN 46032 **Customer Care:** 877-671-7011

Fax: 1-877-424-8494

Company name		P.O. number			Date		
Oudoussinhou	Fuerente		2	3		5	
Order number	Example	1	2	3	4	5	
Edge guard model	7305						
UL							
Length	40"						
Finish	630						
Handing	RH						
Active/Inactive							
Door thickness	13/4"						
Mounting hardware							
Cutout options and locations							
Option A							
Location A							
Option B	#7 hinge cutout						
Location B	39 ³ /8"						
Option C	#7 hinge cutout						
Location C	7 ³ /8"						
Quantity	1						

Detail

Edge guar	d model
7300	Mortise
7301	Mortise, beveled
7302	Mortise, wrap
7302B	Mortise, wrap beveled
7303	Mortise, bull
7304	Non-mortise
7305	Non-mortise, beveled
7306	Non-mortise, wrap
7306B	Non-mortise, wrap beveled
7307	Non-mortise, bull
7308	Overlap
7309	Overlap, beveled
7310	Overlap, wrap
7310B	Overlap, wrap beveled
7311	Overlap, bull
7310S	Semi-overlap, wrap
7310SB	Semi-overlap, wrap beveled
7302-A	Mortise, astragal
7302B-A	Mortise, astragal beveled
7306-A	Non-mortise, astragal
7306B-A	Non-mortise, astragal beveled
UL	
Blank	Non-rated
UL	UL fire rated
Length	
12"-120"	Length, 1/8" increments

Finish	
605	Bright Brass
606	Satin Brass
612	Satin Bronze
613	Oil Rubbed Bronze
628	Aluminum, Clear Anodized
629	Bright Stainless
630	Satin Stainless
630-AM	Satin Stainless, Antimicrobial
Handing	
LH	Left hand
RH	Right hand
LHR	Left hand reverse
RHR	Right hand reverse
131113	Mg/m/maria/cvc/sc
	active door¹
Active/Inc	
Active/Inc	
Active/Inc	active door¹
Active/Inc Active Inactive	active door¹
Active/Inc Active Inactive	active door¹
Active/Inc Active Inactive Door thick	active door¹ kness Standard
Active/Inc Active Inactive Door thick 13/4" 2"	standard Optional Optional
Active/Inc Active Inactive Door thick 13/4" 2" 21/4"	standard Optional Optional
Active/Inc Active Inactive Door thick 13/4" 2" 21/4" Mounting	standard Optional Optional hardware

Cutout options and locations		
Option A		
1 1/8 x 2 3/4"	No. 1 cylinder strike	
1 1/4 x 4 7/8"	No. 2 ASA strike	
1 x 6 ³ / ₄ "	No. 3 auto and constant latch flush bolt	
1 x 8 ¹ / ₂ "	No. 4 constant latch flush	
	bolt-wood doors	
11/4 x 8"	No. 5 mortise lock	
1 1/8 x 2 1/4"	No. 6 latch bolt	
1 x 4 ¹ / ₂ "	No. 7 hinge	
1 x 5"	No. 8 hinge	
1" diameter	No. 9 ² auxiliary fire latch inactive	
1 x 1 ⁴⁹ / ₆₄ "	No. 10 ² auxiliary fire latch active	
Location A	Bottom to CL	
Option B	Same options as listed above	
Location B	Bottom to CL	
Option C	Same options as listed above	
Location C	Bottom to CL	
Quantity		
	202 4 72020 4 72064 72060 4 44	

^{1.} Required for 7302-A, 7302B-A, 7306A, 7306B-A only. 2. 6" from bottom to CL.

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in seamless access, with leading brands like CISA® Interflex® LCN® Schlage® SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion secures people and assets with a range of solutions for homes, businesses, schools and institutions. Allegion had \$2.7 billion in revenue in 2018, and sells products in almost 130 countries.

For more, visit www.allegion.com.

KRYPTONITE - LCN - SCHLAGE - STEELCRAFT - VON DUPRIN

