


THIS DIAGRAM REPRESENTS A GENERIC CONFIGURATION. CUSTOM WIRING DIAGRAMS CAN BE ACQUIRED BY CONTACTING TECHNICAL SUPPORT.

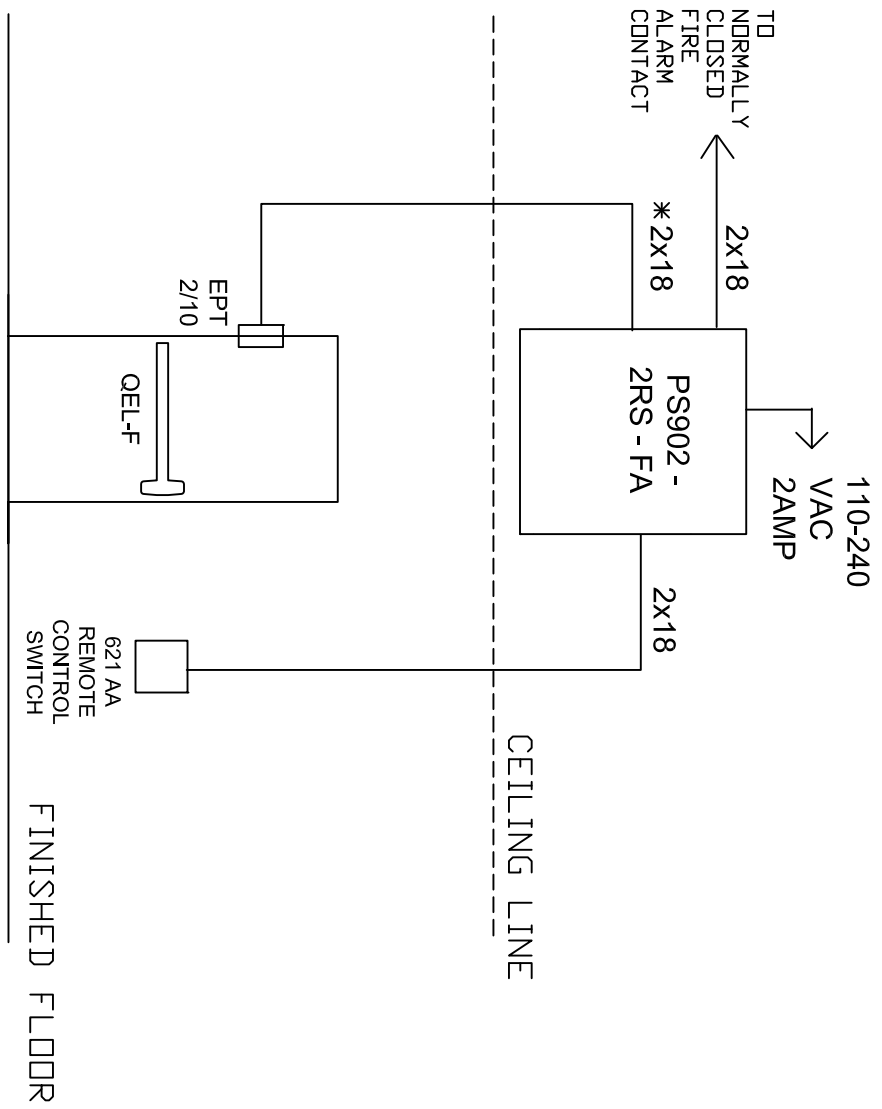

NOTE:
 *USE #18 GAUGE WIRE FOR DISTANCES UP TO 200' FROM EPT TO PS914
 SET PS914 TO 24VDC

NOTES:
 1) ALL LOW VOLTAGE WIRING TO BE STANDARD, MULTI-CONDUCTOR COLOR CODED WITHOUT SPLICES.
 2) WIRING TO CONFORM TO APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL CODES.
 3) REFER TO SPECIFIC PRODUCT INSTALLATION INSTRUCTIONS FOR SPECIFIC WIRING REQUIREMENTS.
 4) THIS DRAWING IS FOR GRAPHICAL REPRESENTATION OF PRODUCTS DETAILED IN THE HARDWARE SET ONLY. THAT IS NOT SHOWN HERE. CONSULT PROVIDER FOR DETAILS.

HARDWARE USED:
 1 VON DUPRIN FIRE RATED QEL PANIC DEVICE
 1 PS902-2RS POWER SUPPLY
 1 EPT POWER TRANSFER
 1 621 AA REMOTE CONTROL PUSH BUTTON
 1 FIRE ALARM CONTACT
 TYPE REMOTE 621AA PB WITH SINGLE FIRE RATED QEL DEVICES

OPERATION:
 REMOTE CONTROL 621 AA PB TO SIGNAL SINGLE QEL ELECTRIC PANIC BAR TO RETRACT FOR ENTRY.
 RELEASING 621 AA PUSH BUTTON OR FIRE ALARM TO CAUSE QEL LATCHES TO EXTEND.
 IN THIS EXAMPLE ALL WIRING CONNECTIONS ARE MADE IN PS914 ENCLOSURE.

DATE DRAWN: 03-13-15
 REVISION DATE: 03-13-15
 copyright 2015

ALLEGION™


TITLE: REMOTE 621AA PB WITH SINGLE FIRE RATED QEL PANICS

DRAWING TYPE: RISER DIAGRAM

DWG NO.: 110826R
 DRAWING CHECKED BY: B DOWE

REV: A

THIS DIAGRAM REPRESENTS A GENERIC CONFIGURATION. CUSTOM WIRING DIAGRAMS CAN BE ACQUIRED BY CONTACTING TECHNICAL SUPPORT.

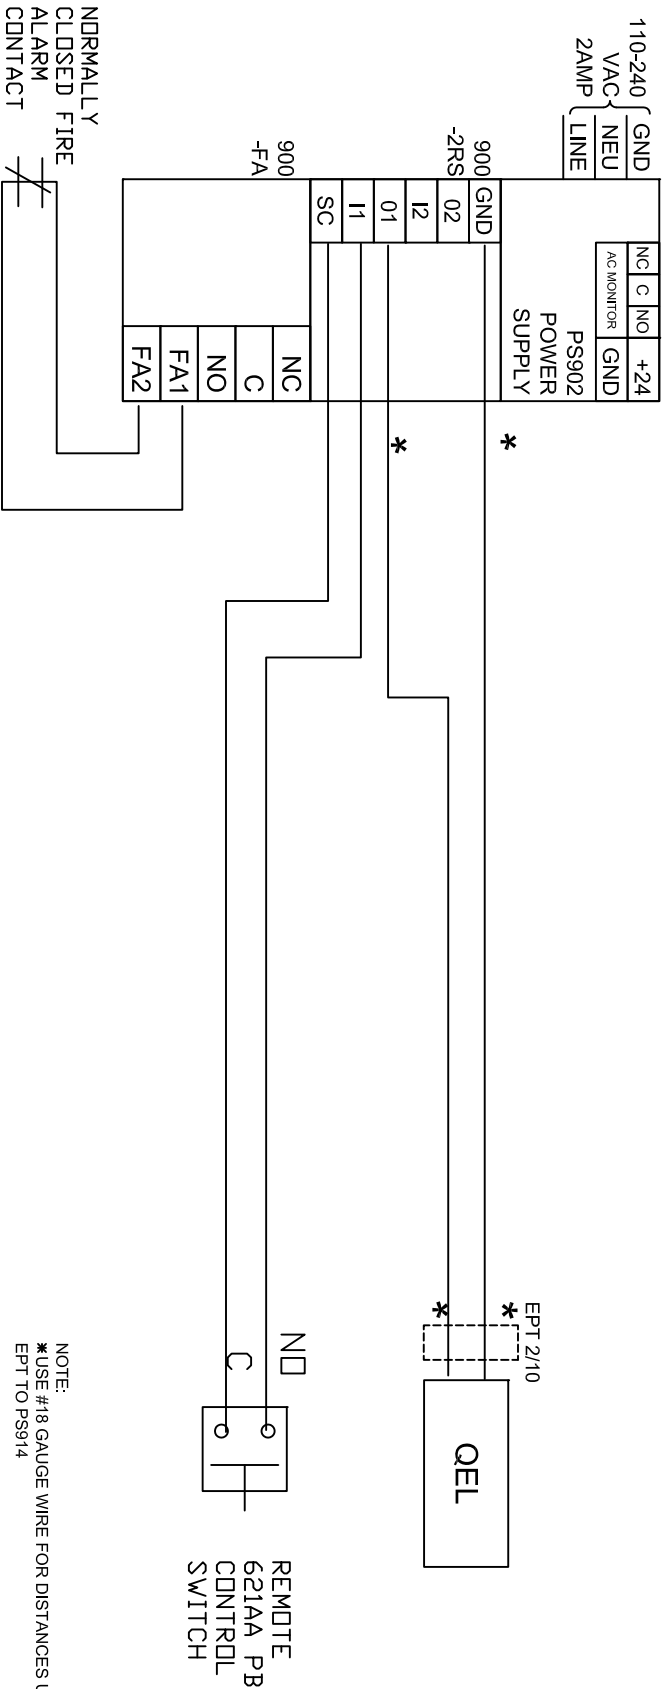

NOTE:
 *USE #18 GAUGE WIRE FOR DISTANCES UP TO 200' FROM EPT TO PS914
 SET PS914 TO 24VDC

NOTES:
 1) ALL LOW VOLTAGE WIRING TO BE STANDARD MULTI-CONDUCTOR COLOR CODED WITHOUT SPLICES.
 2) WIRING TO CONFORM TO APPLICABLE NATIONAL, STATE AND LOCAL ELECTRICAL CODES.
 3) REFER TO SPECIFIC PRODUCT INSTALLATION INSTRUCTIONS FOR SPECIFIC WIRING REQUIREMENTS.
 4) THIS DRAWING IS FOR GRAPHICAL REPRESENTATION OF PRODUCTS DETAILED IN THE HARDWARE SET ONLY. 5) ADDITIONAL WIRING WILL BE REQUIRED FROM ACP THAT IS NOT SHOWN HERE. CONSULT PROVIDER FOR DETAILS.

HARDWARE USED:
 1 VON DUPRIN FIRE RATED QEL PANIC DEVICES
 1 PS902-2RS POWER SUPPLY
 1 EPT POWER TRANSFER
 621 AA REMOTE CONTROL SWITCH
 1 FIRE ALARM CONTACT

TYPE REMOTE 621AA PB WITH SINGLE FIRE RATED QEL DEVICES

OPERATION:
 REMOTE CONTROL 621AA PB TO SIGNAL SINGLE QEL ELECTRIC PANIC BARS TO RETRACT FOR ENTRY.
 RELEASING 621AA PUSH BUTTON OR FIRE ALARM TO CAUSE QEL LATCHES TO EXTEND.

IN THIS EXAMPLE ALL WIRING CONNECTIONS ARE MADE IN PS914 ENCLOSURE.

DATE DRAWN: 03-13-15 REVISION DATE: 03-13-15
 copyright 2015

TITLE: REMOTE 621AA PB WITH SINGLE FIRE RATED QEL PANICS

DRAWING TYPE: WIRING DIAGRAM

DWG NO: 110826W
 DRAWN/CHECKED BY: B DOVE

REV: A