SCHLAGE

RS-485 integration for AD-300 hardwired and AD-400 wireless devices

Max 64 total

Software

Ethernet

EP2500 Controller

MERCURY SECURITY

RS-485

RS-485

Max 8

PIM400-485
Panel interface module

900 MHz

Max 16 per PIM

AD-400
wireless devices

AND/OR

Max 8

AD-300
hardwired devices

+

+

Max 8

PIM400-485
Panel interface module

900 MHz

Max 16 per PIM

AD-400
wireless devices

AND/OR

Max 8

AD-300
hardwired devices
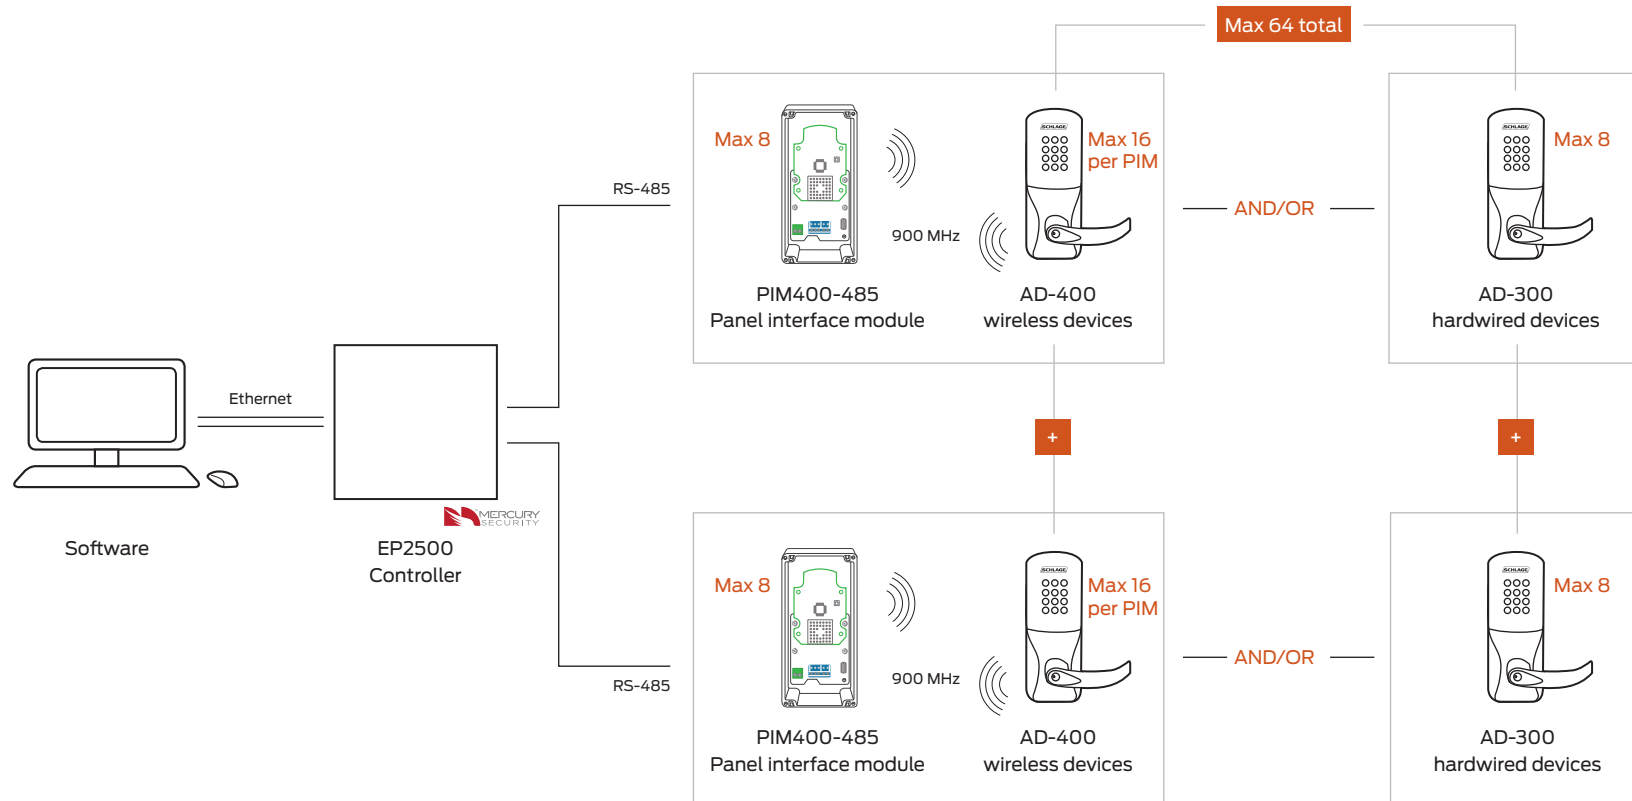
Wireless range up to 200' in typical building construction, up to 1000' line of sight

ALLEGION