RS-485 integration for AD-300 hardwired and AD-400 wireless devices

Max 10 total

RS-485

Max 10

900 MHz

PIM400-485
Panel interface module

Max 10
per PIM

AD-400
wireless devices

AND/OR

Max 10

AD-300
hardwired devices

+

+

Ethernet

Software

Controller

RS-485

Max 10

900 MHz

PIM400-485
Panel interface module

Max 10
per PIM

AD-400
wireless devices

AND/OR

Max 10

AD-300
hardwired devices
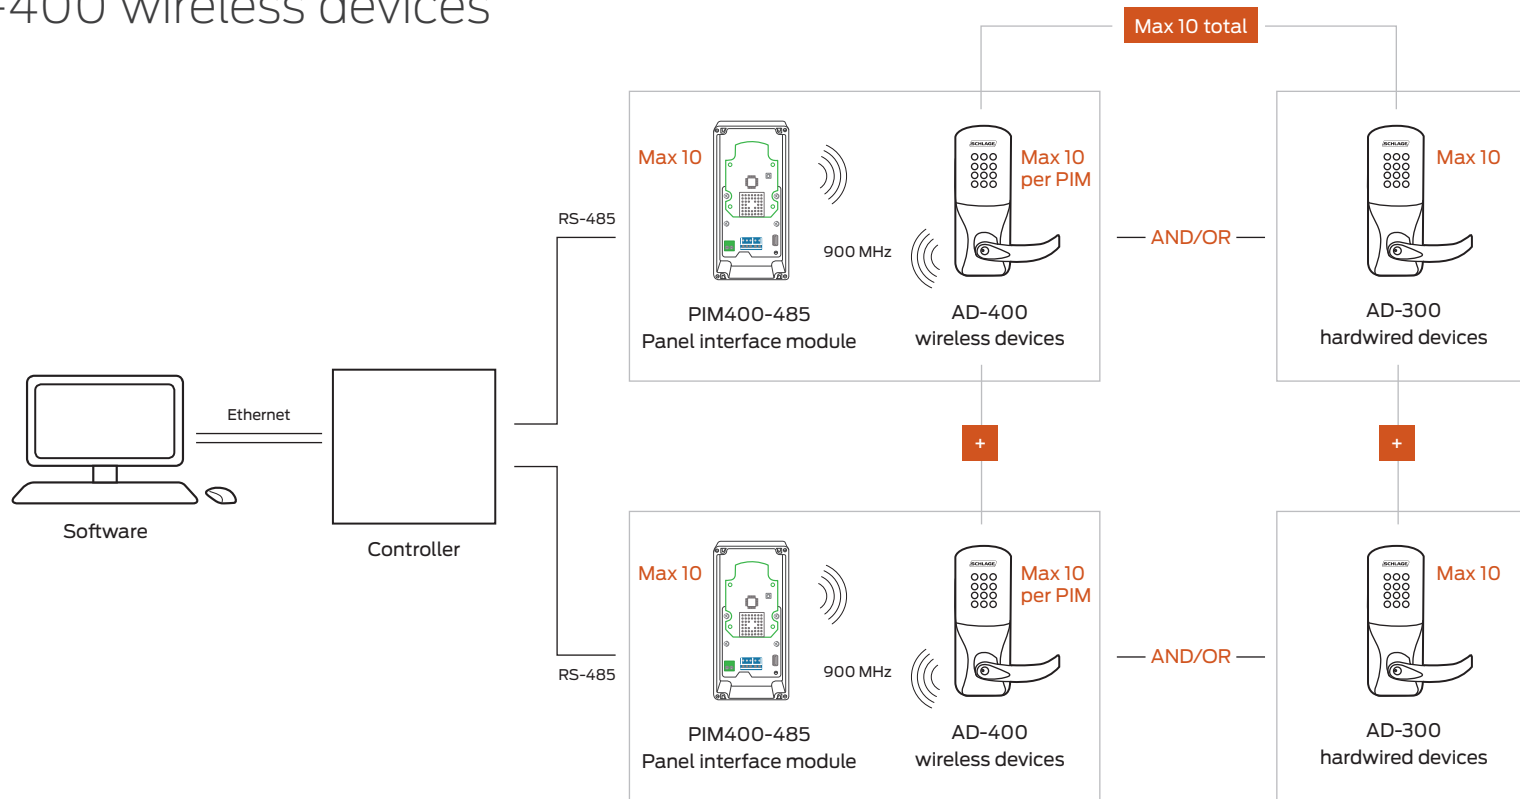
Wireless range up to 200' in typical building
construction, up to 1000' line of sight

ALLEGION