RS-485 integration for AD-400 wireless devices

Max 64 total

Max4

Max 16 per PIM

RS-485

900 MHz

PIM400-485
Panel interface module

AD-400
wireless devices

Ethernet

Software

Controller

+

RS-485

Max 6 depending on controller/configuration
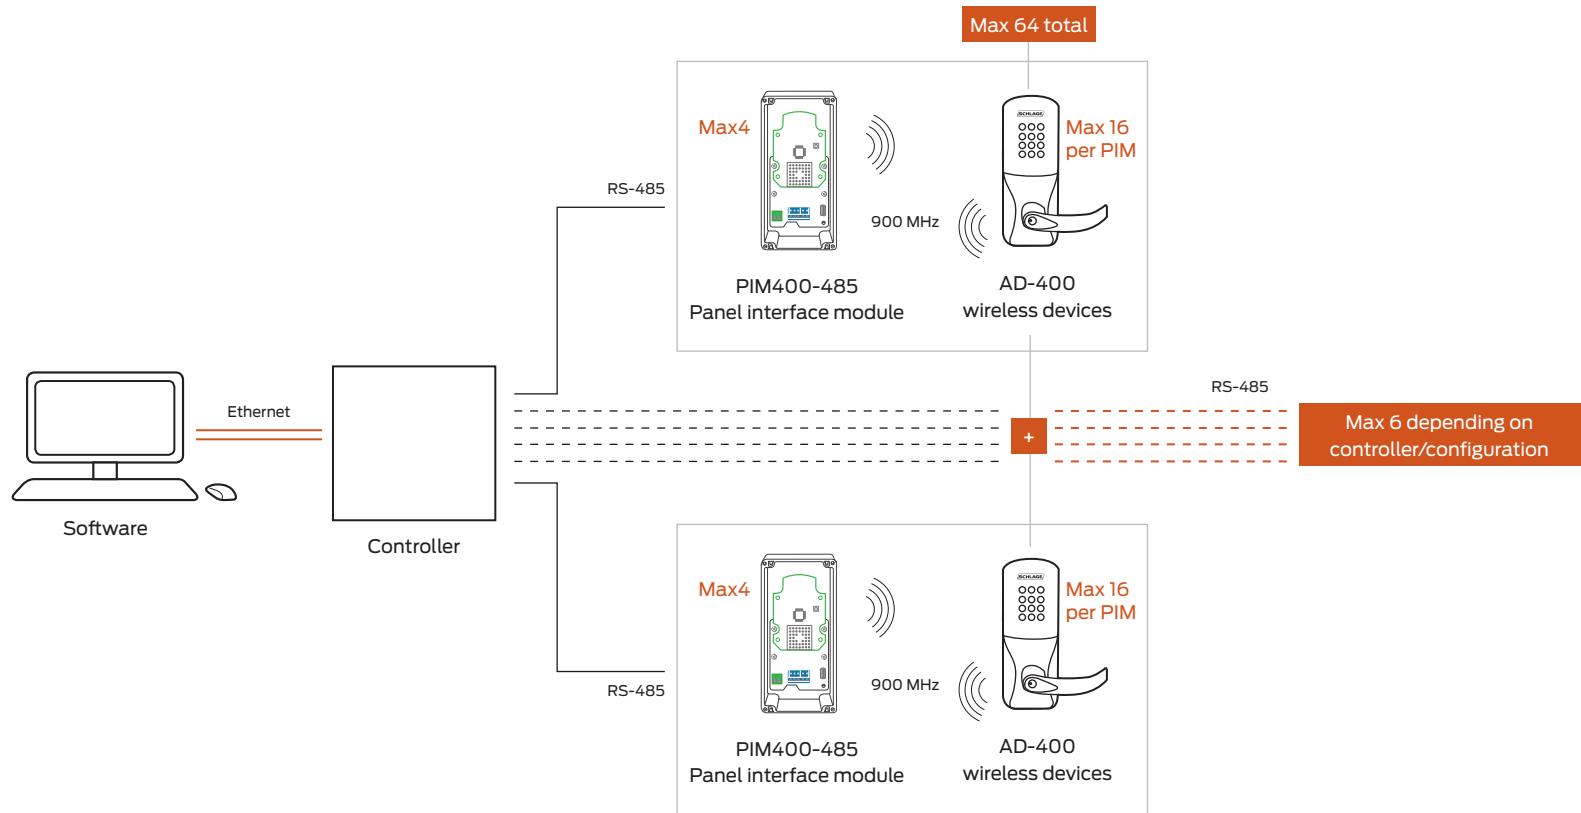
Max4

Max 16 per PIM

RS-485

900 MHz

PIM400-485
Panel interface module

AD-400
wireless devices

Wireless range up to 200' in typical building construction, up to 1000' line of sight

ALLEGION