


# FALCON®

## S-Lock and X-Lock Tailpiece Installation

For proper function of the lock, the tailpiece must be installed correctly. All S and X locks with standard cylinders must have the tailpiece installed **HORIZONTALLY** on the cylinder as shown.

**NOTE:** The cap must be properly adjusted. If too loose, excessive plug end play will prevent the key from being withdrawn. If too tight, the plug will drag, making it difficult to rotate the key.

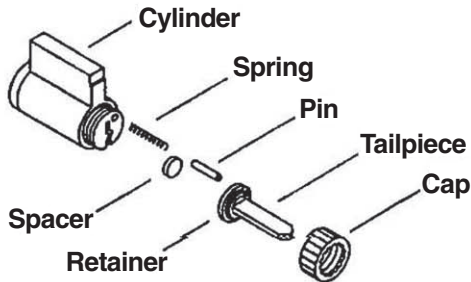


**ALLEGION™**

© Allegion 2014  
Printed in U.S.A.  
030101-000-70 Rev. 10/14-d



5.500

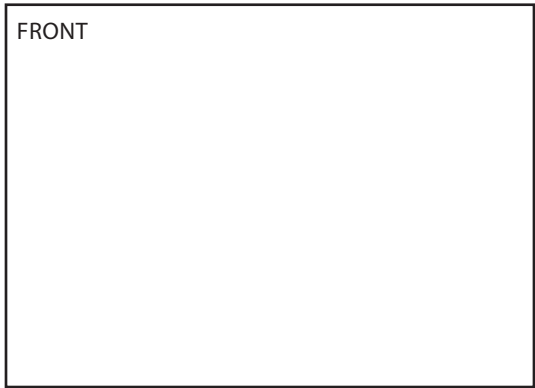

4.000

Additional Notes:
1. None

Revision History						Revision Description: D > Revised artwork					
A	B	C	D	E	F						
4600-264	0790	6683									
Material						Edited By		Approved By		EC Number	Release Date
White Paper						J. Ellis		M. Roberts		xxxxx	10/14
Notes						Title					
1. printed one side						S-Lock and X-Lock Tailpiece Installation					
2. printed black						Creation Date		Number		Revision	
3. tolerance ± .13						10-28-14		030101-000-70		D	
4. printed in country may vary						Created By		Activity			
						J. Ellis		3899 Hancock Expwy Security, CO 80911			
						Software: InDesign CS6				© Allegion 2014	