

**SECURITY BOLT**

FOR USE ON INTERIOR AND EXTERIOR DOORS FOR ADDED SECURITY.

**INSTALLATION INSTRUCTIONS**

TOOLS REQUIRED: Drill, 5/16" and 1/16" drill bits, chisel, hammer and Phillips screwdriver.


1. Position bolt flush with edge of door approximately 48" from bottom of door, and mark. For angle strike installation (C), position bolt approx. 1/16" between bolt and door jamb.

2. Mark, drill (with 1/16" drill bit) and secure bolt.

For rim strike application (A) — Align with bolt, mark shape of strike and mortise to 1/16" in depth and secure.

For surface strike application (B) — Align with bolt, mark, drill and secure.

For angle strike application (C) — Align with bolt, mark shape of strike and mortise to 1/16" deep in stop strip. Mark 3 hole centers. Drill bolt hole 5/16" dia. x 7/16" deep and secure.

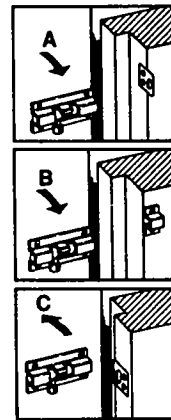


**MAINTENANCE INSTRUCTIONS**

H.B. Ives Solid Brass products have a clear, protective lacquer coating which helps prevent discoloration. Do not use abrasive waxes or cleaners.

**ASK FOR OTHER FINE DECORATIVE HARDWARE BY H.B. IVES**



WINDOW LOCKS



DOOR STOPS



COAT & HAT HOOKS



DOOR BOLTS



SECURITY-BOLT C87 B3 BRF

MADE IN U.S.A.