


GF3000

Mortise Mounted Shear Lock

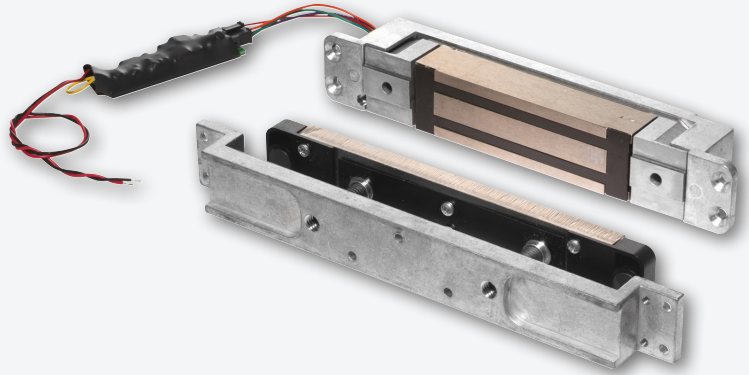

Overview

GF3000 Series shear locks feature a patented design, offering advances over any shear lock in the market.

A microprocessor-based control module provides advanced electronic features. This circuitry automatically senses and adjusts input voltage, allowing for operation from 12 to 24 volt DC power sources.

These mortise shear locks offer the advantage of a totally concealed locking mechanism, providing superior security and appearance while allowing for normal door movement. The patented design incorporates locking "tabs" on the magnet assembly with mating grooves in the armature plate.

The GF3000 Series locks are ideally suited for commercial grade quality hollow metal doors and frames, and are designed to be compatible with HERCULITE® brand glass doors with top rail. Advances in design provide low operating temperatures, making these shear lock suitable for use in the growing demand for concealed locks in wood frames.

The GF3000TRD model is available when armature adjustment is required from the edge of the door due to flush ceiling conditions. The GF3000BRD model is available when no top rail mounting is available.

Features & Benefits

- 3000 lb. hold force rating
- Fully concealed shear lock mortise design
- Automatic voltage selection (AVS) 12/24 VDC (filtered and regulated)
- Built-in automatic relock switch
- Adjustable time delay on relock, 2-30 seconds
- Low temperature operation
- Microprocessor controlled
- Optional Magnetic Bond Sensor (MBS) and Door Status Monitor (DSM) to monitor the secure/not secure condition of the lock and to sense the open/closed position of the door
- ANSI/BHMA 156.23, UL 10C, cUL, and CSFM certifications
- Limited lifetime warranty on magnetic coil

GF3000 Mortise Mounted Shear Lock Specifications

| Specification | GF3000 | GF3000TRD | GF3000BRD |
|----------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Holding force | 3000 lbs. | 3000 lbs. | 3000 lbs. |
| Input voltage* | 12/24 VDC | 12/24 VDC | 12/24 VDC |
| Current draw | .90A @ 12 VDC .45A @ 24 VDC | .90A @ 12 VDC .45A @ 24 VDC | .90A @ 12 VDC .45A @ 24 VDC |
| Lock body dimensions (L x H x D) | 9-1/2" x 1-1/2" x 1-1/2" | 9-1/2" x 1-1/2" x 1-1/2" | N/A |
| Lock body with mounting tabs | 11-9/16" x 1-1/2" x 1-1/2" | 11-9/16" x 1-1/2" x 1-1/2" | 7-1/16" x 1-1/2" x 1-3/16" |
| Threshold box | N/A | N/A | 7-1/2" x 2-1/4" x 1-3/4" |
| Armature | 8-3/8" x 1-3/8" x 1/2" | 8-3/8" x 1-3/8" x 1/2" | 6-1/8" x 1-3/8" x 7/16" |
| Armature bracket | 10-5/8" x 1-3/8" x 1" | 6-1/4" x 1-3/8" x 1-1/4" | 6-1/4" x 1-3/8" x 1-1/4" |
| Weight | 7 lbs. | 6 lbs. | 6 lbs. |
| Certifications | UL 10C, cUL, CSFM, ANSI/BHMA 156.23 | UL 10C, cUL, CSFM, ANSI/BHMA 156.23 | UL 10C, cUL, CSFM, ANSI/BHMA 156.23 |

*Requires filtered, regulated power supply.

Ordering Information

- **GF3000 (Standard Model):** Fully concealed shear lock. The armature mounts into top of door or top rail and magnet mounts into header or frame. Air gap adjustment is from top edge of door.
- **GF3000TRD (Top Rail Door):** Fully concealed shear lock intended for use when top of door is not accessible for air gap adjustment after door is hung. Armature mounts into top of door or top rail and magnet mounts into header or frame. Air gap adjustment is from latch edge of door
- **GF3000BRD (Bottom Rail Door):** Fully concealed shear lock intended for use when top of door is not accessible for air gap adjustment after door is hung. Armature mounts into bottom of door or bottom rail and magnet mounts into floor. Air gap adjustment is from edge of armature. Popular application compatible with HERCULITE® brand glass doors.

Options

- **DSM/MBS** - Door Status Monitor/Magnetic Bond Sensor