



PT Series™

Grade 2 Tubular Locks

OVERVIEW


Purpose-built to serve the commercial real estate, retail, multifamily, and hospitality industries, Schlage Performance Series™ locks feature exceptional quality and style at a highly competitive price point. The PT Series offers four functions, all made to meet Schlage's rigorous quality standards. They bring together aesthetic options appropriate for the design-forward occupant touch points of these industries and the full range of Schlage key system security. You can use PT Series as part of a common aesthetic. They are made to suite with other Allegion products to present a quality, complete door hardware solution and provide a consistent user experience throughout your building or complex. Better yet, you can perfectly suite the PT Series with PM Series mortise locks, as they share lever and rose styles.



FINISHES



613
Oil Rubbed Bronze




619
Satin Nickel



622
Matte Black



625
Bright Chrome



626
Satin Chrome



643e
Aged Bronze

Learn more about the Schlage Performance Series, including the PC Series cylindrical lock and PM Series mortise lock

LEVER STYLES



Athens (ATH)



Broadway (BRW)



Latitude (LAT)



Longitude (LON)



Neptune (NEP)
Suites with Sparta



Playa (PLA)



Rhodes (RHO)



Selena (SEL)




Tubular (TLR)




Two (TWO)

Dimensions		
Lever	Width	Projection
Athens (ATH)	4.58"	2.65"
Broadway (BRW)	4.00"	2.47"
Latitude (LAT)	4.00"	2.47"
Longitude (LON)	5.21"	2.47"
Neptune (NEP)	4.60"	2.68"
Playa (PLA)	4.75"	2.40"
Rhodes (RHO)	5.03"	2.51"
Selena (SEL)	4.78"	2.40"
Tubular (TLR)	4.87"	2.60"
Two (02)	4.75"	2.60"

Return to door meets 1/2" requirement for LON, RHO, NEP & TLR levers.

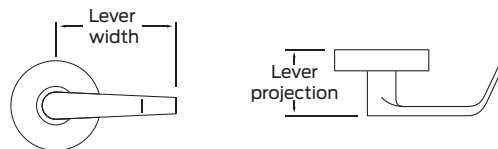


ROSES




A rose

Available for use on PT Series lever designs. Specify by adding 'A' after lever design.



C rose

Available for use on PT Series lever designs. Specify by adding 'C' after lever design.



D rose

Available for use on PT Series lever designs. Specify by adding 'D' after lever design.


Order example: PT10 – TLR – A – 626 – LH

Rose	Diameter	Crossbore
A	2-1/8"	1-7/8" (non-standard prep)
C	2-9/16"	2-1/8" (standard prep)
D	2-9/16"	2-1/8" (standard prep)



MECHANICAL NON-KEYED LOCK FUNCTIONS


Legend

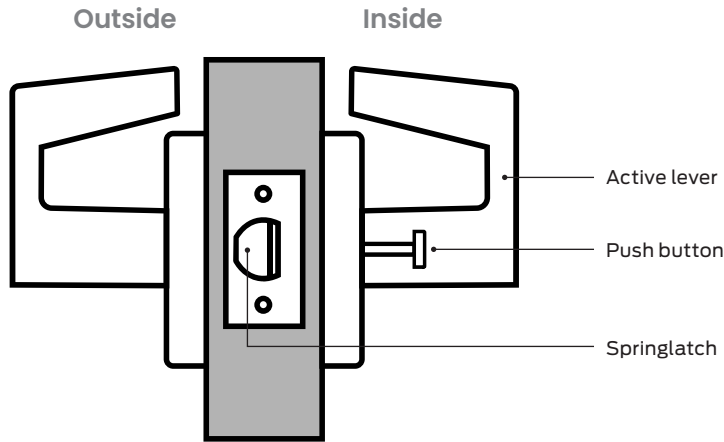

Key




Product Identification Guide



Schlage PT10

ANSI
F75




Passage latch

- Levers both sides; springlatch
- Latch retracted by lever from either side at all times
- Inside lever always free for immediate egress

Schlage PT40

ANSI
F76




Bath/bedroom privacy lock

- Lever with emergency release privacy-pin access in rose outside; lever with push button in rose inside; springlatch
- In unlocked state latch is retracted by either lever
- Outside lever is made inoperative by pushing button on inside rose
- Rotating inside lever retracts latch and releases button unlocking outside lever; closing door also unlocks preventing lock-out
- Emergency unlock: an allen key (provided) is inserted or pushed through outside rose access hole and releases button to unlock outside lever
- Inside lever always free for immediate egress

Schlage PT170

ANSI
-




Single dummy trim

- Fixed lever one side only; no latch or chassis
- Used for door pull or matching inactive trim

Schlage PT172

ANSI
-



Double dummy trim

- Fixed levers—both sides; no latch or chassis
- Used for door pull or matching inactive trim

SPECIFICATIONS

Chassis	
Material	Zinc and steel
Door thickness	Standard: 1-3/8" (35 mm) to 1-3/4" (44 mm) Optional: 1-3/4" (44 mm) to 2" (51 mm) Spring cage is self-adjustable for accommodating door ranges
Backset	Standard: 2-3/4" (70 mm) Optional: 2-3/8" (60 mm)
Door prep	C and D large roses conform to ANSI/SDI A250.14 door prep. A small rose meets 1-7/8" cross bore prep.
Trim	
Handing	Field-reversible handing
Levers	Pressure cast zinc, plated to match product finish specification in 10 designs – Athens (ATH), Broadway (BRW), Latitude (LAT), Longitude (LON), Neptune (NEP), Playa (PLA), Rhodes (RHO), Selena (SEL), Tubular (TLR) and Two (TWO)
Rose	Three roses: A, C, D designs; stainless steel or stamped brass plated to match product finish specification
Finishes	Six available: 613, 619, 622, 625, 626, 643e
Latches & Strikes	
Latch bolt	Steel latchbolt with 1" throw. Privacy latch restoring to prevent accidental lock outs. Standard: 1-1/8" x 2-1/4" with 2-3/4" backset with square faceplate Optional: 1" x 2-1/4" with 2-3/8" backset with square faceplate
Strike	1-1/8" x 2-3/4" with 1-1/8" lip length, square corner T-strike
Warranty	
	5 years
Certifications	
ANSI/BHMA	ANSI/BHMA A156.2, Series 4000, Grade 2 tubular lock
ICC	Complies with ICC A117.1 Accessible and Usable Buildings and Facilities
UL/cUL	UL 10C and CAN/ULC-S104; Passage PT10 and Privacy PT40 locks: 3-hour A label single fire door 4'0" x 8'0"
CA Fire Code	All levers with a return to door of 1/2" (13 mm) or less comply (Boardwalk, Longitude, Neptune, Rhodes and Tubular)