


Gateway IP(PoE) integration for NDE/B, LE/B, Control and Control mobile enabled wireless locks and RU/RM exit devices



per gateway wireless locks AND/OR Max 10 per gateway LE/B wireless locks Max 2,048 total per appliance AND/OR Max 10 per gateway Control/Control mobile enabled smart locks AND/OR Exit devices with RU/RM option

Gateway communication range up to 30' in typical building environments; a detailed site survey is recommended.

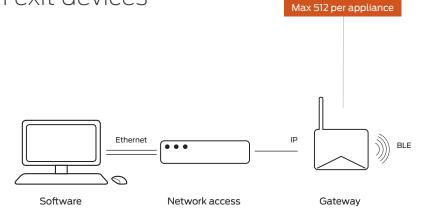