

2720 Tobey Drive, Indianapolis, IN 46219 Tel 1-877-671-7011 • Fax 800-851-0000 Zero.Customer.Support@allegion.com www.zerointernational.com

Part description: Part No:


6575

Saddle threshold

Provided by: **Notes:**

Job no: Date: **Customer name:**

Image may not be shown to scale

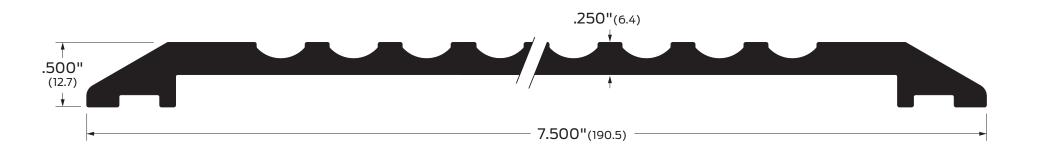

Notes:

Model 6570 (see Saddle Thresholds section) may also be suitable for this application (Type 1 only), depending on configuration with floor-mounted automatic door closers. Check that the bevel allows adequate clearance.

Cei	rtif	icat	ions:

Fire rated-UL10c

ANSI/BHMA:

657A, 675BK, 657D, 657G 657A-E, 675BK-E, 657D-E, 657G-E

J32100, J32130 J32200, J32230 Finishes:

Aluminum mill finish BK Aluminum black anodized D Aluminum dark bronze

anodized

G Aluminum gold anodized Options:

Е Epoxy abrasive tread

EL Photoluminescent and abrasive epoxy tread

V3 Full body strength fill

EV3 Epoxy and full body strength fill

ELV3 Photoluminescent and abrasive

epoxy tread, full body strength fill