

**Product Release Information: Schlage Express 4.4.6**

<b>Product</b>	Schlage Express
<b>Version Number</b>	Version: 4.4.6
<b>Production Release Date</b>	July 2024
<b>Customer Support</b>	For more information or support, visit our <a href="#">website</a> .

**Attention:**

Only customers using 48bits C1000 corporate cards should upgrade to version 4.4.6. If this condition does not apply, there is no need to proceed with the upgrade.

This document contains the release notes for Schlage Express version 4.4.6 which includes updates from the previous release 4.4.5 in January 2019.

The following sections describe this release in detail and will provide important information that supplements the Schlage Express Software Manual.

**System Requirements for 4.4.6:**

- **Operating System:** Microsoft Windows XP and XP Professional SP1/SP2, Windows Vista 32-bit (except Home or Starter Edition), Windows 7, Windows 8, Windows 10
- **Hard Disk Space:** 1 GB for software plus storage as required for Audits and Backups based on the system settings
- **Memory:** 256 MB RAM
- **Web Browser:** To view generated reports, an up to date web browser such as Chrome, Firefox, or Internet Explorer is required

**Installation and Upgrade Notes:*****Installation***

Read and follow the instructions in the Software Manual or the Upgrade Instructions in these release notes while installing or upgrading Schlage Express Version 4.4.6.

You will need to back up your facilities before performing an upgrade install. A backup can be created any time Schlage Express is shut down. See the Upgrade Appendix in the Software Manual or READ ME for more details.

You will find the latest Software Manual [here](#) and at the Allegion Library [here](#) by searching for “Schlage Express Software Manual”.

### ***Who should upgrade?***


Customers using 48bits C1000 corporate cards should upgrade to 4.4.6

Allegion recommends keeping all devices up to date with the latest firmware and software. We strive to provide the best products and service for our customers.

Installing the latest firmware and software releases will allow customer(s) to get the most from their devices and allow for better overall functionality and product support.

### **Recent Changes:**

- **Bit format added in Credential:** Users can add the 48bit C1000 HID credential in manual mode and it will generate the octal value of the card. This octal value can be added to a door file as credential. Once a door is programmed using this door file, a respective card holder can get access to the door.

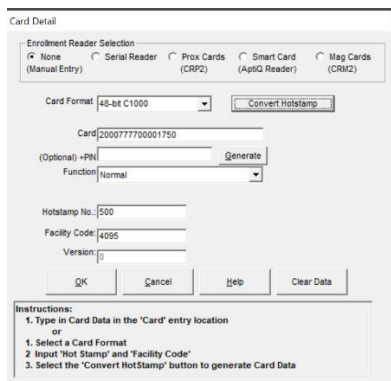

Card Detail

Enrollment Reader Selection  
☒ None ☐ Serial Reader ☐ Prox Cards (CRP2) ☐ Smart Card (AptIQ Reader) ☐ Mag Cards (CRM2)

Card Format: 48-bit C1000

Card: 200077770001750

(Optional) +PIN:

Function: Normal

Hotstamp No.: 500

Facility Code: 4095

Version: 0

Instructions:  
1. Type in Card Data in the 'Card' entry location  
or  
1. Select a Card Format  
2. Input 'Hot Stamp' and 'Facility Code'  
3. Select the 'Convert HotStamp' button to generate Card Data

## **Upgrade Instructions:**

Follow the directions below to upgrade your system from a previous version of Schlage Express. *(These instructions are also available in the Appendix of the User's Manual.)*

**NOTE:** *Non-Default settings in "Program Settings" and other individual settings will not be backed up and will need to be reentered into the new version after upgrade.*

### **1. Backup the database**

- a. The system is set, by default, to automatically backup the database whenever the system is closed. Make sure this feature is enabled. *(See page 29 of the User Manual for details)*
- b. Close the system and back up the database by confirming the back up when prompted in the pop-up message

### **2. Copy the backed-up database file to another location or folder**

- a. Open the location of the backup file
- b. Copy the file
- c. Paste the copied file into a new directory of your choice

### **3. Uninstall the current version of Schlage Express**

- a. Open the **Control Panel**
- b. Open the **Add or Remove Programs** option
- c. Select *Name* from the *Sort by* drop down box
- d. Scroll down the list until you see **SchlageExpress**
- e. Select it
- f. Click the **Remove** button. SchlageExpressv4.4.5 will be uninstalled

### **4. Delete the Schlage Express folder from Program Files** *(Because of the ProxXLator.exe program the folder will need to be manually removed)*

- a. Go to **My Computer**
- b. Click on **C:\**
- c. Click on **Program Files**
- d. Find and Select the **Schlage/Schlage Express** folder
- e. If the above folder exists then continue this steps otherwise goto **step5**
- f. Right Click and select **Delete** from the drop-down options. The Confirm Folder Delete window will open
- g. Click **OK**. The folder will be deleted

### **5. Install this version (4.4.6) of Schlage Express** *(See the Installing/Starting Schlage Express chapter in the User's Manual for details)*

**6. Restore the backup of the previous version**

- a. Sign into Schlage Express
- b. Go to ***Facility>Restore Backup***
- c. Click **Yes**. The Select Facility to Restore window will open.
- d. Navigate to the database that was backed up from the previous version and select the backup file
- e. Click **Open**. The Existing Facility File Found window will open
- f. Click OK

The old Database has been attached to the new version of Schlage Express and your upgrade is complete.