


Surface Vertical Rod Device

HH98/9927 & HH98/9927-F



Installation Instructions

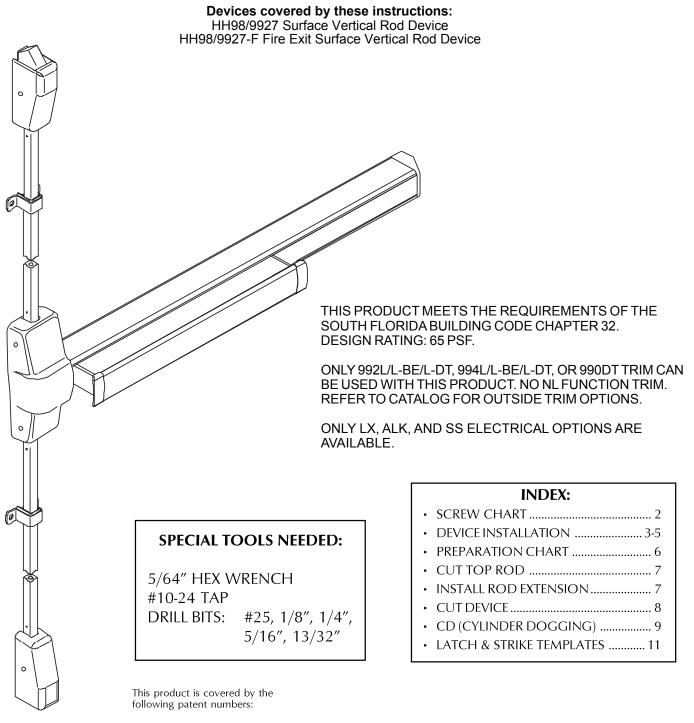



3,767,2384,427,2233,854,7634,466,6434,167,2804,741,563




SCREW CHART

	#10-24 X 1"	SURFACE MOUNT OR SEXBOLTS (1-3/4" DOOR)
	() [] #10-24 X 1-1/2"	
	#10 X 1-1/4" WOOD SCREW	SURFACE MOUNT (WOOD)
	- PACKAGED WITH TRIM -	990 TRIMS (1-3/4" DOOR)
	()	990 TRIMS (2-1/4" DOOR)
B	#10-24 X 3/4"	SURFACE MOUNT OR SEXBOLTS (1-3/4" DOOR)
	#10-24 X 1-1/8"	SEXBOLTS 2-1/4" DOOR
	#10 X 1-1/4" WOOD SCREW	SURFACE MOUNT (WOOD)
C .	#10-16 X 3/8" THREAD CUTTING	END CAP
	1/4-20 X 3/4"	
	1/4-20 X 1-1/4"	
	#10-24 X 3/4"	Metal frame
	#10 X 1-1/4" WOOD SCREW	Wood Frame
F	#8-32 X 1/4"	—— LATCH COVERS
6	#10-12 X 10-24 X 1" COMBINATION	METAL OR WOOD DOOR
	#8-18 X 3/8" THREAD CUTTING	CENTER CASE COVER

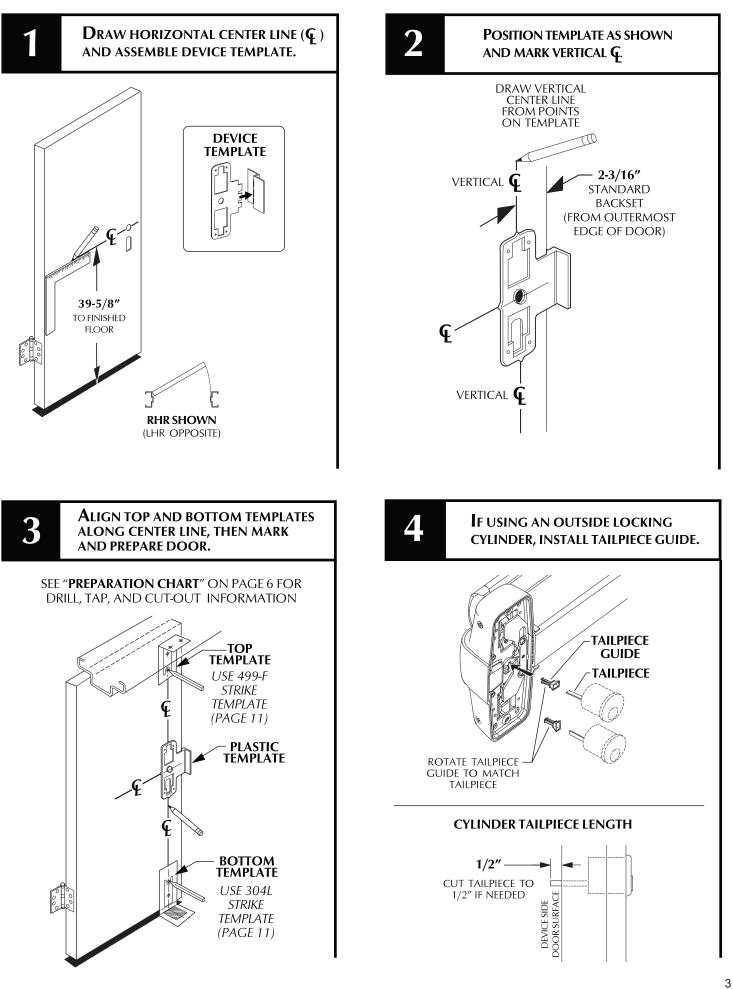


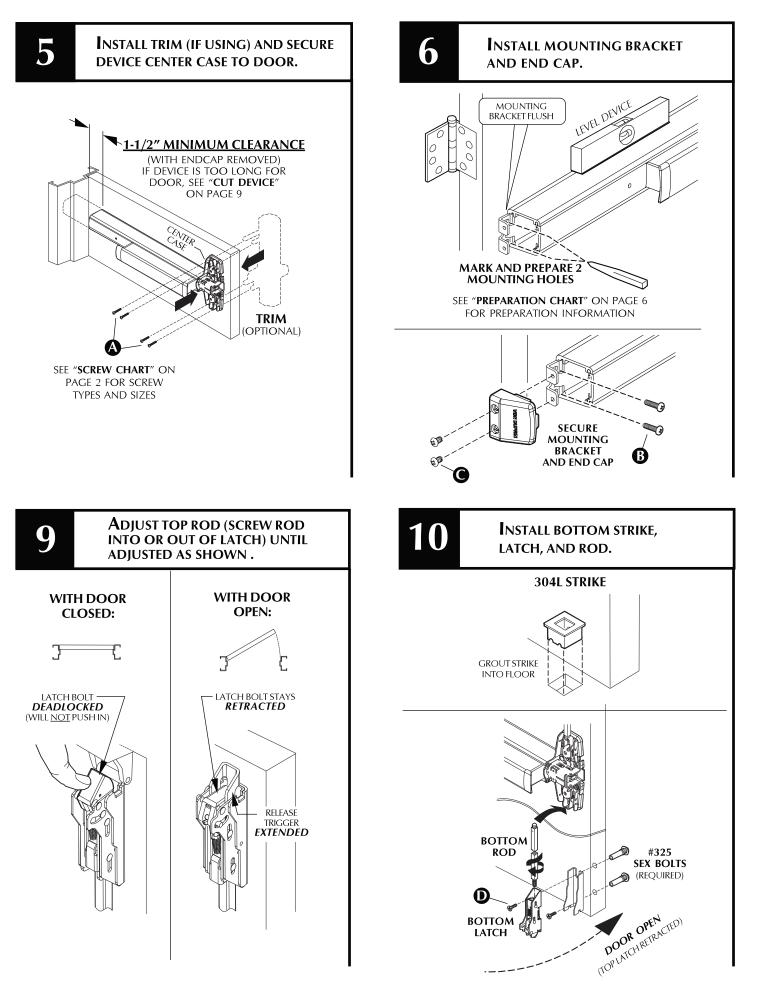

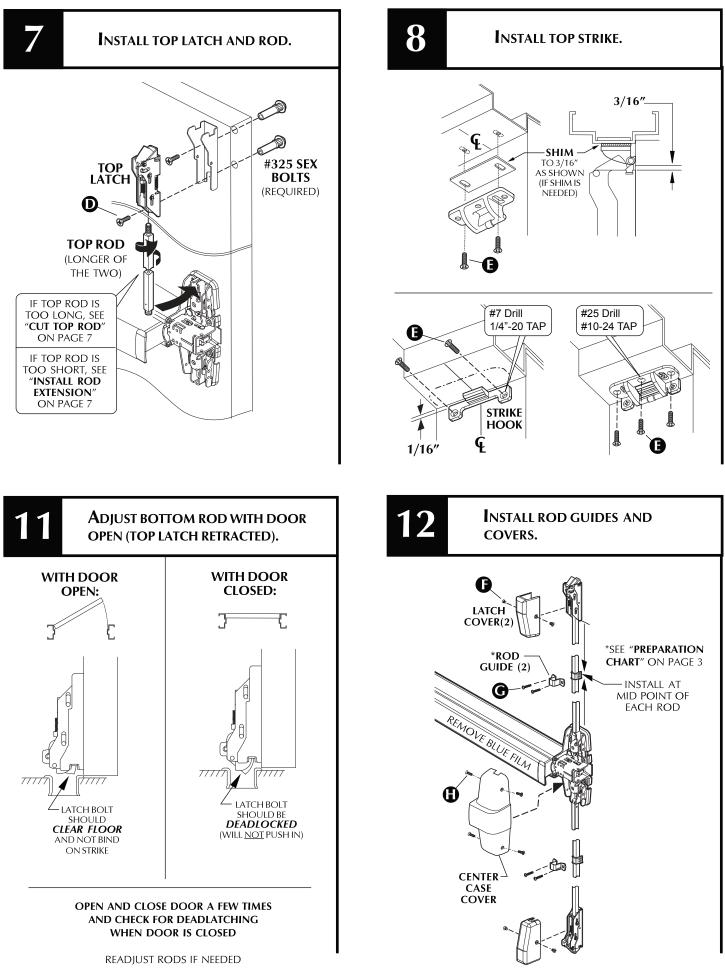



PREPARATION CHART

GO TO INSTRUCTIONS ON NEXT PAGE BEFORE USING PREPARATION CHART

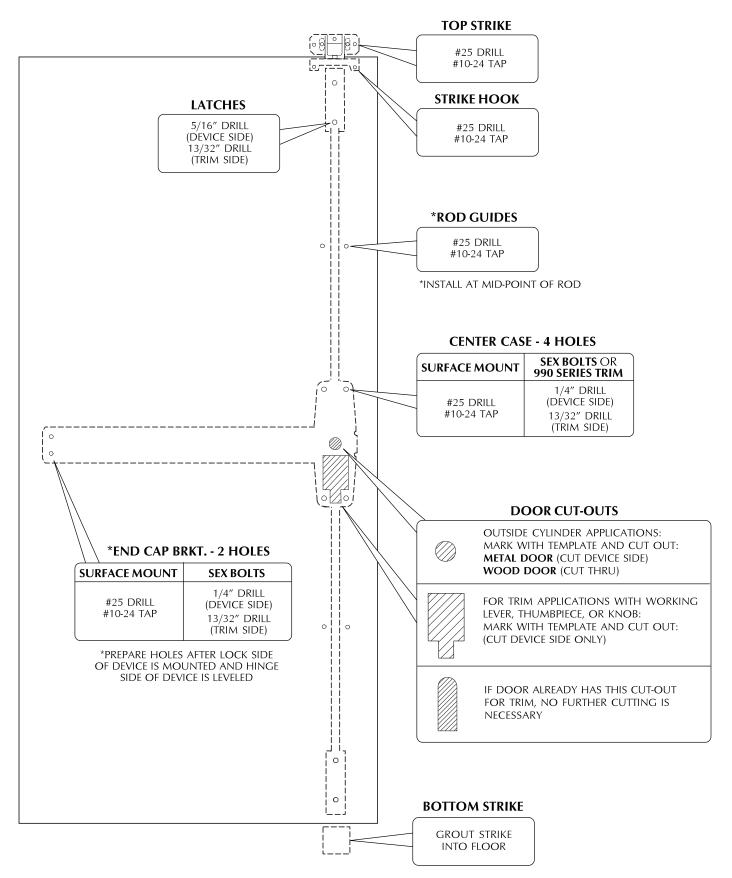

CUT TOP ROD

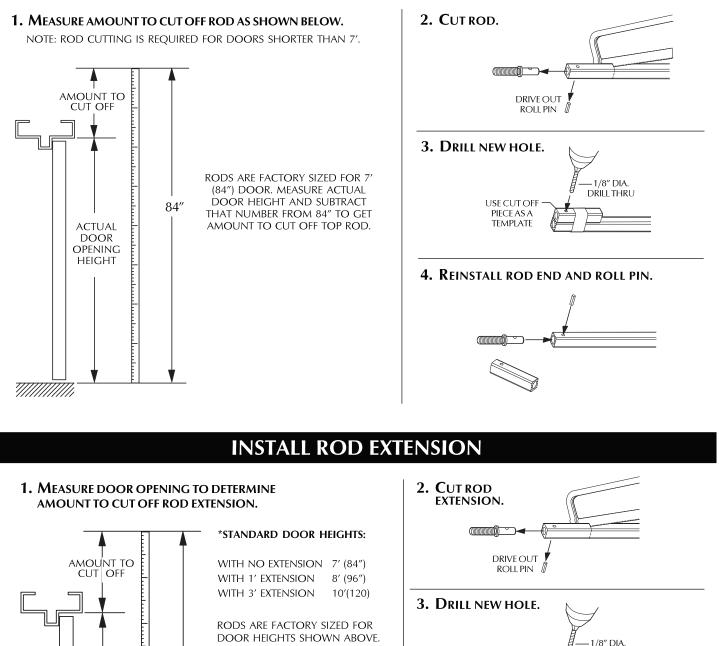

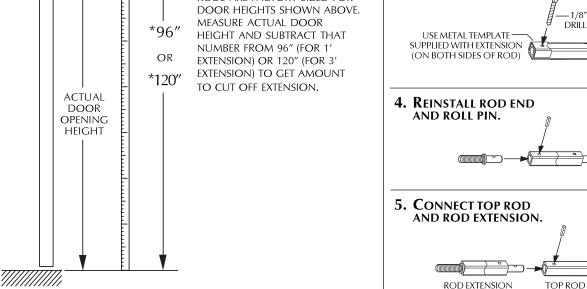


DRILL THRU

CUT DEVICE


2

MEASURE AMOUNT TO CUT OFF DEVICE.

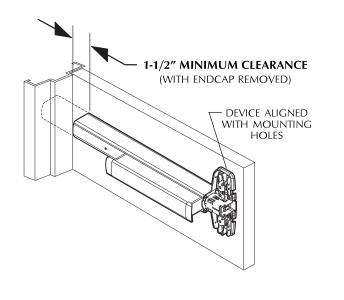


REMOVE ANTI RATTLE CLIP TAPE COVER PLATE (FLUSH TO PUSHBAR) PUSHBAR

TAPE AND MARK AREA BEING CUT.

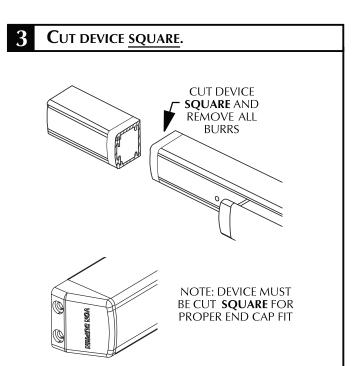


4 SLIDE ANTI RATTLE CLIP INTO DEVICE.



CD (CYLINDER DOGGING)

- **1.** REMOVE MORTISE CYLINDER CAM AND REINSTALL IN REVERSE (FIGURE 1).
- **2.** INSERT KEY AND ROTATE CAM TO INSTALL THE CYLINDER TO THE COVER PLATE (FIGURE 2).
- **3.** REMOVE KEY TO SLIDE COVER PLATE IN POSITION IN THE MECHANISM CASE.

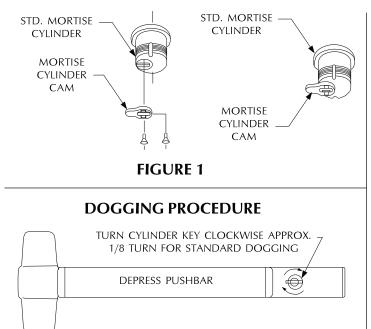

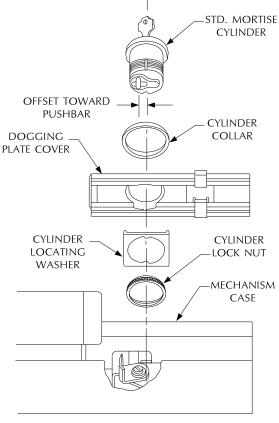


FIGURE 2

LATCH AND STRIKE TEMPLATES

